

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 724 264 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:

02.12.1998 Bulletin 1998/49

(21) Application number: 96101282.0

(22) Date of filing: 30.01.1996

(51) Int Cl.<sup>6</sup>: G11B 27/32, G11B 7/00,  
G11B 27/10, G11B 19/02,  
G11B 20/00, G11B 20/12,  
H04N 5/85, H04N 9/804,  
H04N 7/32, H04H 1/00,  
G06F 17/30, H04N 7/52  
// H04N5/926

(54) A recording medium on which a data containing navigation data is recorded, a method and apparatus for reproducing a data according to navigation data, a method and apparatus for recording a data containing navigation data on a recording medium, and a system for transferring data via a communication route on the basis of navigation data

Aufzeichnungsmedium auf dem Daten mit Navigationsdaten aufgezeichnet sind, Verfahren und Gerät zur Wiedergabe von Navigationsdaten entsprechenden Daten, Verfahren und Gerät zur Aufzeichnung von Navigationsdaten enthaltenden Daten auf einem Aufzeichnungsmedium und System zur Übertragung von Daten über einen Übertragungsweg auf Basis von Navigationsdaten

Un milieu d'enregistrement sur lequel a été enregistrée une donnée comprenant des données de navigation, une méthode et un appareil pour reproduire une donnée suivant des données de navigation, une méthode et un appareil pour enregistrer une donnée comprenant des données de navigation sur un milieu d'enregistrement et un système pour transférer des données par une voie de communication sur la base de données de navigation

(84) Designated Contracting States:  
AT BE CH DE ES FR GB IT LI LU NL SE

(30) Priority: 30.01.1995 JP 13164/95

(43) Date of publication of application:  
31.07.1996 Bulletin 1996/31

(60) Divisional application: 98110317.9 / 0 872 839

(73) Proprietor: KABUSHIKI KAISHA TOSHIBA  
Kawasaki-shi (JP)(72) Inventors:  
• Kikuchi, Shinichi, c/o Int Prop Div, K.K. Toshiba  
Tokyo 105 (JP)  
• Arafune, Takeo, c/o Int Prop Div, K.K. Toshiba  
Tokyo 105 (JP)  
• Kitamura, Tetsuya, c/o Int Prop Div, K.K. Toshiba  
Tokyo 105 (JP)  
• Mimura, Hideki, c/o Int Prop Div, K.K. Toshiba  
Tokyo 105 (JP)

- Taira, Kazuhiko, c/o Int Prop Div, K.K. Toshiba  
Tokyo 105 (JP)
- Tamada, Yuzo, c/o Int Prop Div, K.K. Toshiba  
Tokyo 105 (JP)

(74) Representative: Henkel, Feiler, Hänzel  
Möhlstrasse 37  
81675 München (DE)

(56) References cited:

EP-A- 0 389 689	EP-A- 0 424 903
EP-A- 0 460 751	EP-A- 0 460 764
EP-A- 0 521 487	EP-A- 0 528 425
EP-A- 0 542 377	EP-A- 0 606 868
EP-A- 0 644 692	EP-A- 0 677 842
EP-A- 0 680 216	EP-A- 0 685 845
WO-A-94/07332	WO-A-94/30014

- TECHNISCHE RUNDSCHAU, vol. 79, no. 11, 13  
March 1987, BERN CH, pages 74-79,  
XP000052363 VON APPELRATH:  
"Bildplatten-Navigations- und  
-Retrievalsysteme"

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

This invention relates to a recording medium on which a data containing navigation data is recorded, a method and apparatus for reproducing a data according to navigation data, a method and apparatus for recording a data containing navigation data on a recording medium, and a system for transferring data via a communication route on the basis of navigation data.

One of well-known optical disks is a compact disk (CD), which has been developed already. With such an optical disk, it is difficult to record and reproduce movie data for a long time in terms of storage capacity. To overcome this shortcoming, an optical disk enabling high-density recording of movie data, too, is being investigated and developed.

Recently, a data compression method for moving pictures has been standardized internationally to be the MPEG (Moving Picture Image Coding Expert Group) scheme. The MPEG scheme is known as a method of variably compressing the video data. Furthermore, the MPEG2 has been proposed and is being standardized internationally. With this movement, a system format complying with the MPEG2 scheme has been determined to be of an MPEG2 system layer. For the MPEG2 system layer, it is determined that the transfer start time and playback time expressed using a reference time for each data item are set so that moving pictures, sound, and their data items can be transferred and reproduced in synchronization with each other.

Only the information on these transfer start time and playback start time, however, makes it difficult to achieve a special playback, such as fast-forward or rewind playback, or a playback process of providing the system with interactive capabilities.

WO-A-94/07332 describes a digital video signal processing apparatus and method by which video data and audio data are recorded in units of a pack onto a disk. Each pack is constituted by a plurality of packets and a header and each packet consists of a header and the coded reproducible data. A pack comprises a video packet, an entry packet and an audio packet, whereby the entry packet is arranged immediately before the video packet header of a video packet containing an I-picture, i.e. an entry point. In each entry packet the relative distances between the current entry point and the three following and preceding entry points or their absolute addresses are indicated. An accelerated search of entry points is possible by reverting to these relative distances or absolute addresses in the entry packet.

An object of the present invention is to provide a recording medium on which a data stream containing navigation data to navigate data capable of special playback, such as fast-forward or rewind playback is recorded.

Another object of the present invention is to provide a method and apparatus for reproducing the data according to the navigation data from a recording medium

on which a data containing navigation data to navigate data capable of special playback, such as fast-forward or rewind playback, is recorded.

Still another object of the present invention is to provide a method and apparatus for recording a data containing navigation data to navigate data capable of special playback, such as fast-forward or rewind playback.

Still another object of the present invention is to provide a communication system that transfers navigation data to navigate data capable of special playback, such as fast-forward or rewind playback, together with playback data, via a communication route.

According to the present invention, there is provided a record in medium, as defined in claim 1.

According to the present invention, there is also provided a method of reproducing playback data as defined in independent claim 12.

Further, according to the present invention, there is provided an apparatus for reproducing playback data as defined in independent claim 19.

Further, according to the present invention, there is also provided a method of recording playback data as defined in claim 26.

Furthermore, according to the present invention, there is provided an apparatus for recording on a recording medium playback data as defined in claim 37.

Furthermore, according to the present invention, there is provided a communication system for transferring playback data, as defined in claim 48.

This invention can be more fully understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a schematic block diagram of an optical disk apparatus according to an embodiment of the present invention;

FIG. 2 is a detailed block diagram of the mechanical section of the disk drive unit of FIG. 1;

FIG. 3 is a schematic perspective view of the structure of an optical disk loaded in the disk drive unit of FIG. 1;

FIG. 4 shows the structure of the logic format of the optical disk of FIG. 3;

FIG. 5 shows the structure of the video manager of FIG. 4;

FIG. 6 shows an example of the structure of the video object set (VOBS) shown in FIG. 5;

FIG. 7 is a diagram to help explain the structure of the video object unit of FIG. 6;

FIG. 8 shows the parameters and contents of the volume manager information management table (VMGI\_MAT) in the video manager (VMGI) of FIG. 5;

FIG. 9 shows the structure of the title search pointer table (TSPT) in the video manager (VMGI) of FIG. 5; FIG. 10 shows the parameters and contents of the title search pointer table information (TSPTI) in the title search pointer table (TSPT) of FIG. 9;

FIG. 11 shows the parameters and contents of the title search pointer (TT\_SRP) corresponding to the input number in the title search pointer table (TSPT) of FIG. 9;

FIG. 12 illustrates the structure of the video title set 5 of FIG. 4;

FIG. 13 shows the parameters and contents of the video title set information management table (VTSI\_MAT) of the video title set information (VTSI) of FIG. 12;

FIG. 14 illustrates the structure of the video title set program chain information table (VTS\_PGCIT) of the video title set information (VTSI) of FIG. 12;

FIG. 15 shows the parameters and contents of the information (VTS\_PGCITI) in the video title set program chain information table (VTS\_PGCIT) of FIG. 14;

FIG. 16 shows the parameters and contents of the search pointer (VTS\_PGCIT\_SRP) corresponding to the program chain in the video title set program chain information table (VTS\_PGCIT) of FIG. 14;

FIG. 17 illustrates the structure of the program chain information (VTS\_PGCI) in the video set corresponding to the program chain in the video title set program chain information table (VTS\_PGCIT) of FIG. 14;

FIG. 18 shows the parameters and contents of the program chain general information (PGC\_GI) in the program chain information (VTS\_PGCI) of FIG. 17;

FIG. 19 illustrates the structure of a program chain map (PGC\_PGMAP) of the program chain information (VTS\_PGCI) of FIG. 17;

FIG. 20 shows the parameters and contents of the entry cell numbers (ECELLN) corresponding to the programs written in the program chain map (PGC\_PGMAP) of FIG. 19;

FIG. 21 illustrate the structure of the cell playback information table (C\_PBIT) of the program chain information (VTS\_PGCI) of FIG. 17;

FIG. 22 shows the parameters and contents of the cell playback information table (C\_PBIT) of FIG. 21;

FIG. 23 illustrates the structure of the cell position information (C\_POSI) in the program chain information (VTS\_PGCI) of FIG. 18;

FIG. 24 shows the parameters and contents of the cell position information (C\_POSI) of FIG. 23;

FIG. 25 illustrates the structure of the navigation pack of FIG. 23;

FIG. 26 illustrates the structure of the video, audio, sub-picture, or VBI pack of FIG. 6;

FIG. 27 shows the parameters and contents of the playback control information (PCI) in the navigation pack of FIG. 26;

FIG. 28 shows the parameters and contents of the general information (PCI\_GI) in the playback control information (PCI) of FIG. 27;

FIG. 29 shows the parameters and contents of the angle information (NSLS\_ANGLI) in the playback

control information (PCI) of FIG. 27;

FIG. 30 is a diagram to help explain how to change the angle using the angle information (NSLS\_ANGLI) in the playback control information (PCI) of FIG. 29;

FIG. 31 shows the parameters and contents of the disk search information (DSI) in the navigation pack of FIG. 26;

FIG. 32 shows the parameters and contents of the DSI general information (DSI\_GI) in the disk search information of FIG. 31;

FIG. 33 shows the parameters and contents of the angle information (SML\_SI) in the disk search information of FIG. 31;

FIG. 34 is a diagram to help explain how to change the angle using the angle information (SML\_SI) in the disk search information (DSI) of FIG. 33;

FIG. 35A shows the parameters and contents of the search information (VOP\_SI) for the video object (VOB) of FIG. 31;

FIGS. 35B and 35C illustrate bit maps describing the forward addresses of the search information (VOB\_SI) on the video object (VOB) of FIG. 31;

FIG. 36 shows the parameters and contents of the synchronizing playback information (SYNCl) on the video object (VOB) of FIG. 31;

FIGS. 37A and 37B, FIG. 38, and FIG. 39 are flowcharts of the procedure for reproducing the video data in the normal mode from an optical disk having logic formats shown in FIGS. 4 to 36;

FIG. 40 is a flowchart of the procedure for changing the angle during playback of the video data from an optical disk having logic formats shown in FIGS. 4 to 36;

FIG. 41 is a flowchart of the procedure for an interrupt process during playback of the video data from an optical disk having logic formats shown in FIGS. 4 to 36;

FIGS. 42A to 42F are flowcharts of the procedure for an example of a high-speed search process of the video data on an optical disk having logic formats shown in FIGS. 4 to 36;

FIG. 43 is a flowchart of the procedure for another example of a high-speed search process of the video data on an optical disk having logic formats shown in FIGS. 4 to 36;

FIG. 44 is a flowchart of the procedure for reproducing the video data from an optical disk having logic formats shown in FIGS. 4 to 36, after a specific time has elapsed;

FIG. 45 is a block diagram of an encoder system that encodes the video data and generates a video file;

FIG. 46 is a flowchart for an encoding process of FIG. 45;

FIG. 47 is a flowchart for combining the main video data, audio data, and sup-picture data all encoded according to the flow of FIG. 46 to create a video

data file;

FIG. 48 is a block diagram of a disk formatter system that records the formatted video files on an optical disk;

FIG. 49 is a flowchart for creating logic data to be recorded on a disk in the disk formatter of FIG. 48;

FIG. 50 is a flowchart for creating from the logic data the physical data to be recorded on a disk; and

FIG. 51 is a schematic diagram of a system that transfers the video title set of FIG. 4 via a communication route.

Hereinafter, referring to the accompanying drawings, an optical disk reproducing apparatus according to an embodiment of the present invention will be explained.

FIG. 1 is a block diagram of an optical disk reproducing apparatus that reproduces the data from an optical disk associated with an embodiment of the present invention. FIG. 2 is a block diagram of the disk drive section that drives the optical disk shown in FIG. 1. FIG. 3 shows the structure of the optical disk shown in FIGS. 1 and 2.

As shown in FIG. 1, the optical disk reproducing apparatus comprises a key/display section 4, a monitor section 6, and a speaker section 8. When the user operates the key/display section 4, this causes the recorded data to be reproduced from an optical disk 10. The recorded data contains video data, sub-picture data, and audio data, which are converted into video signals and audio signals. The monitor section 6 displays images according to the video signals and the speaker section 8 generates sound according to the audio signals.

It is known that the optical disk 10 is available with various structures. For instance, one type of the optical disk 10 is a read-only disk on which data is recorded with a high density as shown in FIG. 3. The optical disk 10, as shown in FIG. 3, is made up of a pair of composite layers 18 and an adhesive layer 20 sandwiched between the composite disk layers 18. Each of the composite disk layers 18 is composed of a transparent substrate 14 and a recording layer or a light-reflecting layer 16. The disk layer 18 is arranged so that the light-reflecting layer 16 may be in contact with the surface of the adhesive layer 20. A center hole 22 is made in the optical disk 10. On the periphery of the center hole 22 on both sides, clamping areas 24 are provided which are used to clamp the optical disk 10 during its rotation. When the disk 10 is loaded in the optical disk apparatus, the spindle of a spindle motor 12 shown in FIG. 2 is inserted into the center hole 22. As long as the disk is being rotated, it continues clamped at the clamping areas 24.

As shown in FIG. 3, the optical disk 10 has an information zone 25 around the clamping zone 24 on each side, the information zones allowing the information to be recorded on the optical disk 10. In each information area 25, its outer circumference area is determined to be a lead-out area 26 in which no information is normally

recorded, its inner circumference area adjoining the clamping area 24 is determined to be a lead-in area 27 in which no information is normally recorded, and the area between the lead-out area 26 and the lead-in area 27 is determined to be a data recording area 28.

At the recording layer 16 in the information area 25, a continuous spiral track is normally formed as an area in which data is to be recorded. The continuous track is divided into a plurality of physical sectors, which are assigned serial numbers. On the basis of the sectors, data is recorded. The data recording area 28 in the information recording area 25 is an actual data recording area, in which management data, main video data, sub-picture data, and audio data are recorded in the form of pits (that is, in the form of changes in the physical state) as explained later. With the read-only optical disk 10, a train of pits is previously formed in the transparent substrate 14 by a stamper, a reflecting layer is formed by evaporation on the surface of the transparent substrate 14 in which the pit train is formed, and the reflecting layer serves as the recording layer 16. In the read-only optical disk 10, a groove is normally not provided as a track and the pit train in the surface of the transparent substrate 14 serves as a track.

The optical disk apparatus 12, as shown in FIG. 1, further comprises a disk drive section 30, a system CPU section 50, a system ROM/RAM section 52, a system processor section 54, a data RAM section 56, a video decoder section 58, an audio decoder section 60, a sub-picture decoder section 62, and a D/A and data reproducing section 64. The system processor section 54 is provided with a system time clock (STC) 54A and a register 54B. The video decoder section 58, audio decoder section 60, and sub-picture decoder section 62 are also provided with system time clocks (STC) 58A, 60A, 62A, respectively.

As shown in FIG. 2, the disk drive section 30 contains a motor driving circuit 11, a spindle motor 12, an optical head 32 (i.e., an optical pickup), a feed motor 33, a focus circuit 36, a feed motor driving circuit 37, a tracking circuit 38, a head amplifier 40, and a servo processing circuit 44. The optical disk 10 is placed on the spindle motor 12 driven by the motor driving circuit 11 and is rotated by the spindle motor 12. The optical head 32 that projects a laser beam on the optical disk 10 is located under the optical disk 10. The optical head 32 is placed on a guide mechanism (not shown). The feed motor driving circuit 37 is provided to supply a driving signal to the feed motor 33. The motor 33 is driven by the driving signal and moves in and out the optical head 32 across the radius of the optical disk 10. The optical head 32 is provided with an object lens 34 positioned so as to face the optical disk 10. The object lens 34 is moved according to the driving signal supplied from the focus circuit 36 so as to move along its optical axis.

To reproduce the data from the above optical disk, the optical head 32 projects a laser beam on the optical disk 10 via the object lens 34. The object lens 34 is

moved little by little across the radius of the optical disk 10 according to the driving signal supplied from the tracking circuit 38. Furthermore, the object lens 34 is moved along its optical axis according to the driving signal supplied from the focusing circuit 36 so that its focal point may be positioned on the recording layer 16 of the optical disk 10. This causes the laser beam to form the smallest beam spot on the spiral track (i.e., the pit train), enabling the beam spot to trace the track. The laser beam is reflected from the recording layer 16 and returned to the optical head 32. The optical head 32 converts the beam reflected from the optical disk 10 into an electric signal, which is supplied from the optical head 32 to the servo processing circuit 44 via the head amplifier 40. From the electric signal, the servo processing circuit 44 produces a focus signal, a tracking signal, and a motor control signal and supplies these signals to the focus circuit 36, tracking circuit 38, and motor driving circuit 11, respectively.

Therefore, the object lens 34 is moved along its optical axis and across the radius of the optical disk 10, its focal point is positioned on the recording layer 16 of the optical disk 10, and the laser beam forms the smallest beam spot on the spiral track. Furthermore, the spindle motor 12 is rotated by the motor driving circuit 11 at a specific rotating speed. This allows the beam to track at, for example, a constant linear speed.

The system CPU section 50 of FIG. 1 supplies to the servo processing circuit 44 a control signal serving as an access signal. In response to the control signal, the servo processing circuit 44 supplies a head-moving signal to the feed motor driving circuit 37, which supplies a driving signal to the feed motor 33. Then, the feed motor 33 is driven, causing the optical head 32 to move across the radius of the optical disk 10. Then, the optical head 32 accesses a specific sector formed at the recording layer 16 of the optical disk 10. The data is reproduced from the specific sector by the optical head 32, which then supplies it to the head amplifier 40. The head amplifier 40 amplifies the reproduced data, which is outputted at the disk drive section 30.

The reproduced data is transferred and stored in a data RAM section 56 by the system processor section 54 which is controlled by the system CPU section 50 which is operated in accordance with the programs stored in the system ROM/RAM section 52. The stored reproduced data is processed at the system processor section 54, which sorts the data into video data, audio data, and sub-picture data, which are supplied to the video decoder section 58, audio decoder section 60, and sub-picture decoder section 62, respectively, and are decoded at the respective decoders. The D/A and data-reproducing section 64 converts the decoded video data, audio data, and sub-picture data into an analog video signal, an analog audio signal, and an analog sub-picture signal, subjects these signal to a mixing process, and supplies the resulting video signal and sub-picture signal to the monitor 6 and the resulting audio signal to

the speaker 8. Then, on the basis of the video signal and sub-picture signal, images are displayed on the monitor section 6 and according to the audio signal, sound is simultaneously reproduced at the speaker section 8.

The detailed operation of the optical disk apparatus of FIG. 1 will be described later with reference to the logic format of the optical disk explained below.

The data recording area 28 between the lead-in area 27 and the lead-out area 26 on the optical disk of FIG. 1 has a volume and file structure as shown in FIG. 4. The structure has been determined in conformity to specific logic format standards, such as Micro UDF or ISO 9660. The data recording area 28 is physically divided into a plurality of sectors as described earlier. These physical sectors are assigned serial numbers. In the following explanation, a logical address means a logical sector number (LSN) as determined in Micro UDF or ISO 9660. Like a physical sector, a logical sector contains 2048 bytes. The numbers (LSN) of logical sectors are assigned consecutively in ascending order as the physical sector number increments.

As shown in FIG. 4, the volume and file structure is a hierarchic structure and contains a volume and file structure area 70, a video manager 71, at least one video title set #i 72, and another recorded area 73. These areas 70, 71, 72, 73 are aligned with the boundaries between logical sectors. As with a conventional CD, a logical sector is defined as a set of 2048 bytes. Accordingly, one logical sector corresponds to one logical block.

The volume and file structure area 70 corresponds to a management area determined in Micro UDF or ISO 9660. According to the description in the management area, the video manager 71 is stored in the system ROM/RAM section 52. As explained with reference to FIG. 5, the information used to manage video title sets 72 is written in the video manager 71, which is composed of a plurality of files, starting with file #0. In each video title set 72, compressed video data, compressed audio data, compressed sub-picture data, and the reproducing information about these data items are stored as explained later. Each video title set is composed of a plurality of files 74. The number of video title sets 72 is limited to a maximum of 99. Furthermore, the number of files 74 (from file #j to file #j+9) constituting each video title set 72 is determined to be a maximum of 10. These files 72 are also aligned with the boundaries between logical sectors.

In the other recorded area 73, the information capable of utilizing the aforementioned video title sets 72 is recorded. The other recorded areas 73 are not necessarily provided.

As shown in FIG. 5, the video manager 71 contains at least three items each corresponding to individual files 74. Specifically, the video manager 71 is made up of volume manager information (VMGI) 75, a video object set for video manager menu (VMGM\_VOBS) 76, and backup of video manager information (VMGI\_BUP)

77. Here, the volume manager information (VMGI) 75 and the backup of video manager information (VMGI\_BUP) 77 are determined to be indispensable items, and the video object set for video manager menu (VMGM\_VOBS) 76 is determined to be an optional item. In the video object set 76 for VMGM, the video data, audio data, and sub-picture data about a menu of the volumes of the optical disk managed by the video manager 71 are stored.

By the video object set 76 for VMGM (VMGM\_VOBS), the volume name of the optical disk 10, the sound accompanying the volume name representation, and the description of the sub-picture are displayed and at the same time, selectable items are provided in the form of sub-pictures as in video reproduction explained later. For example, the video object set 76 for VMGM (VMGM\_VOBS) indicates that the optical disk 10 contains the video data representing the matches a boxer played until he won a world championship. Specifically, a fighting pose of boxer X, together with a volume name, such as the glorious history of boxer X, is reproduced in the form of video data and at the same time, his theme song is reproduced in sound, and his chronological table is provided in a sub-picture. Furthermore, the user is asked which language option to select, English or Japanese, in doing the narration of the matches. At the same time, the user is asked whether a caption in another language should be provided in a sub-picture or which language option should be selected for a caption. Thus, for example, the VMGM video object set 76 (VMGM\_VOBS) provides the user with preparations to watch a video of a match of boxer X in English speech with a sub-picture using Japanese captions.

Here, the structure of a video object set (VOBS) 82 will be described with reference to FIG. 6. FIG. 6 shows an example of a video object set (VOBS) 82. The video object set (VOBS) 82 comes in three types for two menus and a title. Specifically, the video object set (VOBS) 82 contains the video object set for video manager menu (VMGM\_VOBS) 76, a video object set (VTSM\_VOBS) 95 for a menu in the video title sets 72 and a video object set (VTSTT\_VOBS) 96 for the titles of at least one video title set 72 in a video title set (VTS) 72 as explained later. Each video object set 82 has the same structure except that their uses differ.

As shown in FIG. 6, a video object set (VOBS) 82 is defined as a set of one or more video objects (VOB) 83. The video objects 83 in a video object set (VOBS) 82 is used for the same application. A video object set (VOBS) 82 for menus is usually made up of one video object (VOB) 83 and stores the data used to display a plurality of menu screens. In contrast, a video object set (VTSTT\_VOBS) 96 for title sets is usually composed of a plurality of video objects (VOB) 83.

When the aforesaid video of a boxing match is taken as example, a video object (VOB) 83 corresponds to the video data of each match played by boxer X. Specifying a particular video object (VOB) 83 enables, for example,

boxer X's eleventh match for a world championship to be reproduced on a video. The video object set (VTSM\_VOBS) 95 for a menu of the video title sets 72 contains the menu data for the matches played by boxer X. According to the presentation of the menu, a particular match, for example, boxer X's eleventh match for a world championship, can be specified. In the case of a usual single story movie, one video object (VOB) 83 corresponds to one video object set (VOBS) 82. One video stream is completed with one video object set (VOBS) 82. In the case of a collection of animated cartoons or an omnibus movie, a plurality of video streams each corresponding to individual stories are provided in a single video object set (VOBS) 82. Each video stream is stored in the corresponding video object 83. Accordingly, the audio stream and sub-picture stream related to the video stream are also completed with each video object (VOB) 83.

An identification number (IDN#j) is assigned to a video object (VOB) 83. By the identification number (ID#j), the video object (VOB) 83 can be identified. A video object (VOB) 83 further comprises one or more such cells 84. Although a usual video stream is made up of a plurality of cells 84, a menu video stream, or a video object (VOB) 83 may be composed of one cell 84. A cell 84 is likewise assigned an identification number (C\_IDN#j). By the identification number (C\_IDN#j), the cell 84 is identified. At the time of the change of the angle explained later, the angle is changed by specifying the cell number.

Here, angle means to change an angle at which an object is viewed in the field of the films. In an example of a boxing match, angle means that the same knockout scene can be seen from different angles: e.g., a scene viewed from the champion, a scene viewed from the challenger, or a scene viewed from the judge. An angle may be selected by the user as he or she wishes, or the same scene may be repeated while the angle is being changed automatically as the story advances. Furthermore, the angle may be changed after the beginning of the same scene has been reached: e.g., the scene is changed the moment that the boxer dealt the opponent a counter and then a scene where the counter is dealt again is played. The angle may also be changed at the scene following the current scene: e.g., the angle is changed the moment that the boxer has dealt the opponent a counter. To achieve any angle change, a navigation pack explained in detail later is provided in a video object unit (VOBU) 85.

As shown in FIG. 6, each cell 84 is composed of one or more video object units (VOBU) 85, normally a plurality of video object units (VOBU) 85. Here, a video object unit (VOBU) 85 is defined as a pack train having a navigation pack (NV pack) 86 at its head. Specifically, a video object unit (VOBU) 85 is defined as a set of all the packs recorded, starting at a navigation pack (NV pack) 86 to immediately in front of the next navigation pack. The reproducing time of the video object unit (VO-

BU) 85 corresponds to the reproducing time of the video data made up of one or more GOP (Group of Pictures) contained in the video object unit (VOBU) 85 as shown in FIG. 7. The maximum reproducing time is determined to be 0.4 or more second and less than one second. In MPEG, one GOP is defined as compressed image data which corresponds to about 15 frames to be played back for, usually, 0.5 seconds.

In the case where the video data includes a video object unit as illustrated in FIG. 6, GOPs each composed of a video pack (V pack) 88, a sub-picture pack (SP pack) 90 and an audio pack (A pack) 91, all complying to the MPEG standards, are arranged, producing a video data stream. Regardless of the number of GOPs, a video object unit (VOBU) 85 is determined based on the time required for producing a GOP. The video object unit (VOBU) 85 has a navigation pack (NV pack) 86 arranged at its head. Any reproduced data, whether audio data, sub-picture data, or audio/sub-picture data, consists of one or more video object units. Thus, even if a video object unit is composed of audio packs only, these audio packs will be reproduced within the time for reproducing the video object unit. The procedure of reproducing these packs will be explained later in detail, along with the procedure of reproducing the navigation pack (NV pack) 86.

The procedure for reproducing these packs, together with the navigation pack, will be explained in detail later.

The video manager 71 will be explained with reference to FIG. 5. The volume management information 75 placed at the head of the video manager 71 contains the information used to search for titles and the information used to manage the video title sets (VTS) 72 such as the information used for reproduction of a video manager menu. The volume management information 75 contains at least three tables 78, 79, 80 in the order shown in FIG. 5. Each of these tables 78, 79, 80 is aligned with the boundaries between logical sectors. A first table 78, a volume manager information management table (VMGI\_MAT) 78 is a mandatory table, in which the size of the video manager 71, the starting address of each piece of the information in the video manager 71, and the attribute information about the video object set (VMGM\_VOBS) 76 for a video manager menu are written.

Written in a second table of the video manager 71, a title search pointer table 79 (TT\_SRPT), is an entry program chain (EPGC) of the video titles (VTS) 72 contained in the optical disk 10 that are selectable according to the entry of a title number from the key/display section 4 on the apparatus.

Here, a program chain 87 is a set of programs 89 that reproduce the story of a title as shown in FIG. 7. Continuous reproduction of a program chain 87 completes the movie of a title. Therefore, the user can start to see the movie from a particular scene of the movie by specifying the program 89.

In a third table of the video manager 71, a video title set attribution table (VTS\_ATRT) 80, the attribute information determined in the video title set 72 in the volume of the optical disk 10 is written. Specifically, in this table 80, the following items are written as attribute information: the number of video title sets, video title set numbers, video attributes, such as a video data compression scheme, audio stream attributes, such as an audio coding mode, and sub-picture attributes, such as the type of sub-picture display.

The contents of the volume manager information management table (VMGI\_MAT) 78 and the title search pointer table (TT\_SRPT) 79 will be explained in detail with reference to FIGS. 8, 9, 10, and 11.

As shown in FIG. 8, written in the volume manager information management table (VMGI\_MAT) 78 are a video manager identifier (VMG\_ID), the size of video manager information (VMGI\_SZ) in logical blocks (one logical block contains 2048 bytes as mentioned above), the version number (VERN) of the optical disk 10 complying with the digital versatile disk video specification, and the category of video manager 71 (VMG\_CAT).

In the category of video manager 71 (VMG\_CAT), a flag indicating whether or not the DVD video directory prohibits copying is written. Further written in the table (VMGI\_MAT) are a volume set identifier (VLMS\_ID), the number of video title sets (VTS\_Ns), the identifier for a person supplying the data to be recorded on the disk (Provider Unique ID: PVR\_ID), a video manager menu video object set start address (VNGM\_VOBS\_SA), the end address (VMGI\_MAT\_EA) of a volume manager information management table (VMGI\_MAT) 78, and the start address (TT\_SRPT\_SA) of a title search pointer table (TT\_SRPT) 79. The end address of VMGI\_MAT 78 (VMGI\_MAT\_EA) and the start address of TT\_SRPT (TT\_SRPT\_SA) 79 are represented by the number of logical blocks, relative to the first logical block.

Furthermore, in the table 78, the start address (VTS\_ATRT\_SA) of the attribute table (VTS\_ATRT) 80 of video title sets (VTS) 72 is represented by the number of bytes, relative to the first byte in the VMGI manager table (VMGI\_MAT) 71, and the video attribute (VMGM\_V\_AST) of the video manager menu (VMGM) is written. Further written in the table 78 are the number of audio streams (VMGM\_AST\_Ns) in the video manager menu (VMGM), the attributes of audio streams (VMGM\_AST\_ATR) in the video manager menu (VMGM), the number of sub-picture streams (VMGM\_SPST\_Ns) in the video manager menu (VMGM), and the attributes of sub-picture streams (VMGM\_SPST\_ATR) in the video manager menu (VMGM).

In the title search pointer table (TT\_SRPT) 79, as shown in FIG. 9, the title search pointer table information (TSPTI) is first written and then as many title search pointers for input numbers 1 to n ( $n \leq 99$ ) as are needed are written consecutively. When only the reproducing data for one title, for example, only the video data for

one title, is stored in the volume of the optical disk, only one title search pointer (TT\_SRP) 93 is written in the table (TT\_SRPT) 79.

The title search pointer table information (TSPTI) contains the number of entry program chains (EN\_PGC\_Ns) and the end address (TT\_SRPT\_EA) of the title search pointer 93. The address (TT\_SRPT\_EA) is represented by the number of bytes, relative to the first byte in the title search pointer table (TT\_SRPT) 79. Furthermore, as shown in FIG. 11, each title search pointer (TT\_SRP) 93 contains the video title set number (VTSN), the program chain number (PGCN), and the start address (VTS\_SA) of the video title set 72. The contents of the title search pointer (TT\_SRP) 93 specifies a video title set 72 to be reproduced and a program chain (PGC) 87 as well as a location in which the video title set 72 is to be stored. The start address (VTS\_SA) of the video title set 72 is represented by the number of logical blocks in connection with the title set 72 specified by the video title set number (VTSN).

The structure of the logic format of the video title set 72 shown in FIG. 4 will be described with reference to FIG. 12. In each video title set (VTS) 72, four items are written in the order shown in FIG. 12. Each video title set (VTS) 72 is made up of one or more video titles having common attributes. The video title set information (VTSI) 94 contains the management information on the video titles, including the information on entry search points, the information on playback of video object sets 72, the information on playback of title set menus (VTSM), and the attribute information on video object sets 72.

Each video title set 72 is provided with the backup of the video title set information (VTSI\_BUP) 97. Between the video title set information (VTSI) and the backup of the information (VTSI\_BUP) 97, a video object set for video title set menus (VTSM\_VOBS) 95 and a video object set for video title set titles (VTSTT\_VOBS) 96 are arranged. Both of the video object sets (VTSM\_VOBS and VTSTT\_VOBS) 95, 96 have the structure shown in FIG. 6, as explained earlier.

The video title set information (VTSI) 94, the backup of the information (VTSI\_BUP) 97, and the video object set (VTSTT\_VOBS) 96 for video title set titles are items indispensable to the video title set 72. The video object set (VTSM\_VOBS) 96 for video title set menus is an option provided as the need arises.

The video title set information (VTSI) 94 consists of four tables as shown in FIG. 12. The four tables are forced to align with the boundaries between logical sectors. The video title set information management table (VTSI\_MAT) 98, a first table, is a mandatory table, in which the size of the video title set (VTS) 72, the start addresses of each piece of information in the video title set (VTS) 72, and the attributes of the video object sets (VOBS) 96 in the video title set (VTS) 72 are written.

The video title set direct access pointer table (VTS\_DAPT) 99, a second table, is an optional table

provided as the need arises. Written in the table 99 are the program chains (PGC) 87 and/or programs (PG) 89 contained in the video title set 72 that are selectable according to the entry of a title number from the key/display section 4 of the apparatus.

The video title set program chain information table (VTS\_PGCIT) 100, a third table, is a mandatory table, in which the VTS program chain information (VTS\_PGCI) 104 is written. The video title set time search map table (VTS\_MAPT) 101, a fourth table, is an optional table provided as the need arises, in which the information on the recording location, for a specific period of time of display, of the video data in each program chain (PGC) 87 in the title set 72 to which the map table (VTS\_MAPT) 101 belongs is written.

Next, the video title information management table (VTSI\_MAT) 98 and video title set program chain information table (VTSI\_PGCIT) 100 shown in FIG. 12 will be described with reference to FIGS. 13 to 20.

FIG. 13 shows the contents of the video title information management table (VTSI\_MAT) 98, in which the video title set identifier (VTS\_ID), the size of the video title set 72 (VTS\_SZ), the version number of the DVD video specification (VERN), and the video title set category (VTS\_CAT) are written in that order. Furthermore, in the table (VTSI\_MAT) 98, the start address of the video object set (VTSM\_VOBS) for VTS menus is expressed by a logical block relative to the first logical block in the video title set (VTS) 72. The start address (VTSTT\_VOB\_SA) of the video object 83 for titles in the video title set (VTS) 72 is expressed by a logical block (RLBN) relative to the first logical block in the video title set (VTS) 72.

Furthermore, in the table (VTSI\_MAT) 98, the end address (VTI\_MAT\_EA) of the video title set information management table (VTI\_MAT) 98 is represented by the number of blocks, relative to the first byte in the table (VTI\_MAT), 98 and the start address of the video title set direct access pointer table (VTS\_DAPT) 99 is represented by the number of blocks, relative to the first byte in the video title set information (VTSI) 94.

Still furthermore, in the table (VTSI\_MAT) 98, the start address (VTS\_PGCIT\_SA) of the video title set program chain information table (PGCIT) 100 is expressed by the number of blocks, relative to the first byte of the video title set information (VTSI) 94, and the start address (VTS\_MAPT\_SA) of the time search map (VTS\_MAPT) 101 in the video title set (VTS) 72 is expressed by a logical sector relative to the first logical sector in the video title set (VTS) 72. Written in the table (VTSI\_MAT) 98 are the video object set (VTSM\_VOBS) 95 for the video title set menu (VTSM) in the video title set (VTS) 72, the video attributes (VTS\_V\_ATR) of the video object set (VTST\_VOBS) 96 for the titles (VTSTT) in the video title set 72, and the number of audio streams (VTS\_AST\_Ns) in the video object set (VTSTT\_VOBS) 82 for the titles (VTSTT) for the video title sets 72. Here, the video attributes (VTS\_V\_ATR) include a video com-



pression mode, a frame rate of the TV system, and an aspect ratio for displaying an image on a display unit.

Written in the table (VTSI\_MAT) 98 are the audio stream attributes (VTS\_AST\_ATR) of the video object set (VTST\_VOBS) for the titles (VTSTT) in the video title set (VTS). The attributes (VTS\_AST\_ATR) include an audio encoding mode indicating how audio is encoded, the number of bits used to quantize audio, and the number of audio channels.

Furthermore, written in the table (VTSI\_MAT) 98 are the number (VTS\_SPST\_Ns) of sub-picture streams in the video object set 82 for the titles (VTSTT) in the video title set (VTS) 72 and the attributes (VTS\_SPST\_ATR) of each sub-picture stream. The attributes (VTR\_SPST\_ATR) for each sub-picture stream include a sub-picture coding mode and a sub-picture display type.

Furthermore, in the table (VTSI\_MAT) 98, written are the number (VTSM\_AST\_Ns) of audio streams in the video title set menu (VTSM), the audio stream attributes (VTSM\_AST\_ATR), the number (VTSM\_SPST\_Ns) of sub-picture streams, and the sub-picture stream attributes (VISM\_SPST\_ATR).

The VTS program chain information table (VTS\_PGCIT) 100 has a structure as shown in FIG. 14. In the information table (VTS\_PGCIT) 100, information on the VTS program chain (VTS\_PGC) is written, starting with information (VTS\_PGCIT\_I) 102 on the information table (VTS\_PGCIT) 100 related to the VTS program chain (VTS\_PGC). In the information table (VTS\_PGCIT) 100, the information (VTS\_PGCIT\_I) 102 is followed by as many VTS\_PGCI search pointer (VTS\_PGCIT\_SRP) 103 used to search for VTS program chains (VTS\_PGC) as the number (#1 to #n) of VTS program chains in the information table (VTS\_PGCIT). At the end of the table, there are provided as many pieces of information (VTS\_PGCI) 104 on the respective VTS program chains (VTS\_PGC) as the number (from #1 to #n) of the VTS program chains (VTS\_PGC).

The information (VTS\_PGCIT\_I) 102 in the VTS program chain information table (VTS\_PGCIT) 100 contains the number (VTS\_PGC\_Ns) of VTS program chains (VTS\_PGC) as shown in FIG. 15. The end address (VTS\_PGCIT\_EA) of the table information (VTS\_PGCIT\_I) 102 is expressed by the number of bytes, relative to the first byte in the information table (VTS\_PGCIT) 100.

Furthermore, as shown in FIG. 16, the VTS\_PGCIT search pointer (VTS\_PGCIT\_SRP) 103 contains the attributes (VTS\_PGC\_CAT) of the program chains (VTS\_PGC) in the video title set (VTS) 72 and the start address (VTS\_PGCI\_SA) of the VTS\_PGC information (VTS\_PGCI) 104 expressed by the number of bytes, relative to the first byte in the VTS\_PGC information table (VTS\_PGCIT) 100. Here, the VTS\_PGC attribute (VTS\_PGC\_CAT) is, for example, an attribute indicating whether an entry program chain (Entry PGC) is the first

one to be reproduced. Usually, an entry program chain (PGC) is written before program chains (PGC) that are not entry program chains (PGC). Generally, program chains (PGC) are reproduced in the description order of VTS\_PGCI as shown in FIG. 14.

The PGC information (VTS\_PGCI) 104 in the video title set 72 contains four items as shown in FIG. 17. In the PGC information (VTS\_PGCI) 104, the program chain general information (PGC\_GI) 105 on a mandatory item is first arranged, followed by at least three items that are made mandatory only when there is a video object 83. Specifically, contained as the three items in the PGC information (VTS\_PGCI) 104 are a program chain program map (PGC\_PGMAP) 106, a cell playback information table (C\_PBIT) 107, and a cell position information table (C\_POSIT) 108.

As shown in FIG. 18, the program chain general information (PGC\_GI) 105 contains the category (PGCI\_CAT) of the program chain 87, the contents (PGC\_CNT) of the program chain (PGC) 87, and the playback time of the program chain (PGC). 87 Written in the category of PGC (PGCI\_CAT) are whether the PGC can be copied or not and whether the programs 89 in the PGC are played back continuously or at random. The contents of PGC (PGC\_CNT) contains the description of the program chain structure, that is, the number of programs 89, the number of cells 84, and the number of angles in the program chain 87. The playback time of PGC (PGC\_PB\_TIME) contains the total playback time of the programs 89 in the PGC. The playback time is the time required to continuously play back the programs 89 in the PGC, regardless of the playback procedure. When an angle mode is available, the playback time of angle cell number 1 is the playback time of the angle.

Furthermore, the program chain general information (PGC\_GI) 105 contains PGC sub-picture stream control (PGC\_SPST\_CTL), PGC audio stream control (PGC\_AST\_CTL), and PGC sub-picture pallet (PGC\_SP\_PLT). The PGC sub-picture stream control (PGC\_SPST\_CTL) contains the number of sub-pictures usable in the PGC 89 and the PGC audio stream control (PGC\_AST\_CTL) likewise contains the number of audio streams usable in the PGC 89. The PGC sub-picture palette (PGC\_SP\_PLT) contains a set of a specific number of color pallets used in all of the sub-picture streams in the PGC 89.

Furthermore, the PGC general information (PGC\_GI) 105 contains the start address (C\_PBIT\_SA) of the cell playback information table (C\_PBIT) and the start address (C\_POSIT\_SA) of the cell position information table (C\_POSIT) 108. Both of the start addresses (C\_PBIT\_SA and C\_POSIT\_SA) are represented by the number of logical blocks, relative to the first byte in the VTS\_PGC information (VTS\_PGCI) 105.

The program chain program map (PGC\_PGMAP) 108 is a map showing the arrangement of the programs 89 in the PGC 87 of FIG. 19. In the map (PGC\_PGMAP) 106, the entry cell numbers (ECCELLN), the start cell

numbers of the individual programs 89, are written in ascending order as shown in FIGS. 19 and 20. In addition, program numbers are allocated, starting at 1, in the order in which the entry cell numbers are written. Consequently, the first entry number in the map (PGC\_PGMAP) 106 must be #1.

The cell playback information table (C\_PBIT) defines the order in which the cells 84 in the PGC 87 are played back. In the cell playback information table (C\_PBIT) 107, pieces of the cell playback information (C\_PBI) are written consecutively as shown in FIG. 21. Basically, cells 84 are played back in the order of cell number. The cell playback information table (C\_PBIT) 107 contains a cell category (C\_CAT) as shown in FIG. 22. Written in the cell category (C\_CAT) are a cell block mode indicating whether a cell is in the block and if it is in the block, whether the cell is the first one, a cell block type indicating whether a cell 84 is not part of the block or is in an angle block, and an STC discontinuity flag indicating whether the system time clock (STC) must be set again.

An "angle block" of cells is defined as a set of cells 84 having a specific angle. The angle can be changed by replacing one angle block with another. In the case of a baseball video program, for example, an angle block representing a scene taken from the outfield may be replaced by an angle block representing a scene taken from the infield.

Further written in the cell category (C\_CAT) are a cell playback mode indicating whether the video object units (VOBU) 85 in the cell 84 are played back continuously or a picture is made still at one video object unit (VOBU) 85 to another in the cell 84, and cell navigation control indicating whether the picture is made still after the playback of the cell or indicating the rest time.

As shown in FIG. 22, the cell playback information table (C\_PBIT) 107 contains the cell playback time (C\_PBTM) representing the total playback time of the PGC 87. When the PGC 87 has an angle cell block, the playback time of the angle cell number 1 represents the playback time of the angle block. Further written in the cell playback information table (C\_PBIT) 107 are the start address (C\_FVOBU\_SA) of the first video object unit (VOBS) 85 in the cell 84 expressed by the number of logical sectors, relative to the first logical sector in the video object unit (VOBS) 85 in which the cell 84 is written and the start address (C\_LVOBU\_SA) of the end video object unit (VOBS) 85 in the cell 84 expressed by the number of logical sectors, relative to the first logical sector in the video object unit (VOBS) 85 in which the cell 84 is written.

The cell position information table (C\_POSIT) 108 specifies the identification number (VOB ID) of the video object (VOB) 85 in the cell used in the PGC 87 and the identification number (Cell\_ID) of the cell 84. In the cell position information table (C\_POSIT) 108, pieces of the cell position information (C\_POSI) corresponding to the cell numbers written in the cell playback information ta-

ble 107 as shown in FIG. 23 are written in the same order as in the cell playback information table (C\_PBIT) 107. The cell position information (C\_POSI) contains the identification number (C\_VOB\_IDN) of the video object unit (VOBS) 85 in the cell 84 and the cell identification number (C\_IDN) as shown in FIG. 24.

As explained with reference to FIG. 6, a cell 84 is a set of video object units (VOBU) 85. A video object unit 85 is defined as a pack train starting with a navigation (NAV) pack 86. Therefore, the start address (C\_FVOBU\_SA) of the first video object unit (VOBU) 85 in a cell 84 is the start address of the NAV pack 86. As shown in FIG. 25, the NAV pack 86 consists of a pack header 110, a system header 111, and two packets 116, 117 of navigation data; namely, a playback control information (PCI) packet 116 and a data search information (DSI) packet 117. As many bytes as shown in FIG. 25 are allocated to the respective sections so that one pack may contain 2048 bytes corresponding to one logical sector. The NV pack is provided immediately before the video pack 88 which contains the first data item in the group of pictures (GOP). Even if the object unit 85 contains no video pack 88, the NV pack 86 is positioned at the head of the object unit 85, provided that the object unit 85 contains an audio pack 91 and/or a sub-picture pack 90. Thus, even if object unit 85 contains no video pack, its playback time is determined on the basis of the time required for playing back a video pack 88, exactly in the same way as in the case where the unit 85 contains a video pack 88.

Here, GOP is defined as a data train constituting a screen determined in the MPEG standards. In other words, GOP is equivalent to compressed data which may be expanded into image data representing a plurality of frames of a moving picture. The pack header 110 contains a pack starting code, a system clock reference (SCR), and a multiplex rate. The system header 111 contains a bit rate and a stream ID. The packet header 112, 114 of each of the PCI packet 116 and DCI packet 117 contains a packet starting code, a packet length, and a stream ID as determined in the MPEG2.

As shown in FIG. 26, another video, audio or sub-picture pack consists of a pack header 120, packet header 121, and a packet 122 containing the corresponding data as in the system layer 24 MPEG 2. Its pack length is determined to be 2048 bytes. Each of these packs is aligned with the boundaries between logical blocks.

The PCI data (PCI) 113 in the PCI packet 116 is navigation data used to make a presentation, or to change the contents of the display, in synchronization with the playback of the video data in the VOB unit (VOBU) 85. Specifically, the PCI data (PCI) 113 contains PCI general information (PCI\_GI) as information on the entire PCI data 113 and angle information (NSLS\_ANGLI) as each piece of jump destination angle information during angle change as shown in FIG. 27. The PCI general information (PCI\_GI) contains the address

(NV\_PCK\_LBN) of the NV pack (NV\_PCK) 86 in which the PCI data is recorded as shown in FIG. 28, the address being expressed in the number of blocks, relative to the VOB logical sector in which the PCI data is recorded. The PCI general information (PCI\_GI) contains the category of VOB (VOBU\_CAT), the start PTS of VOB 85 (VOBU\_SPTS), and the end PTS of VOB 85 (VOBU\_EPTS). Here, the start PTS of VOB 85 (VOBU\_SPTS) indicates the playback start time (start presentation time stamp (SPTS)) of the video data in the VOB 85 containing the PCI data. The playback start time is the playback start time of the first picture in the first GOP in the VOB 85. Normally, the first picture corresponds to I picture (intra-picture) data in the MPEG standards. The end PTS (VOBU\_EPTS) in the VOB 85 indicates the playback end time (end presentation time stamp (EPTS)) of the video data in the VOB 85 containing the PCI data. The playback end time is the playback start time of the last picture in the last GOP in the VOB 85.

The angle information (NSLS\_ANGLI) contains as many start addresses (NSLS\_ANGC\_DSTA) of the angle cells at jump destinations as the number of angles as shown in FIG. 29. Each of the start addresses is represented by a logical sector relative to the logical sector of the NV pack 86 in which the PCI data is recorded. When the angle is changed on the basis of the angle information (NSLS\_ANGLI), the angle information (NSLS\_ANGLI) contains either the start address of the VOB in another angle block whose playback time is equal to that of the VOB 85 in which the PCI data is recorded as shown in FIG. 30, or the start address (NSLS\_ANGC\_DSTA) of the VOB 85 in another angle block whose playback time is closest to the preceding one.

According to the description of the start address (NSLS\_ANGC\_DSTA) of such an angle cell, the angle is changed in a concrete example as follows. Assuming that a series of consecutive scenes where in a baseball game, the pitcher throws a ball, the batter hits the ball, and the ball lands in the stands, the change of the angle will be explained. An angle cell (ANG\_C#j) can be changed on a video object unit (VOBU) 85 basis as shown in FIG. 30. In FIG. 30, the video object units (VOBU) 85 are assigned numbers in the order of playback. The video object unit (VOBU#n) 85 corresponding to playback number n of an angle cell (ANG\_C#j) stores the video data for a different scene which is contemporary with or immediately preceding that for which the video data is stored in the video object unit (VOBU#n) 85 with playback number n corresponding to another angle cell (ANG\_C#1) or angle cell (ANG\_C#9). It is assumed that in an angle cell (ANG\_C#j), VOBUs are arranged consecutively as video data used to show on the screen the whole view including the pitcher and batter and a series of actions. It is also assumed that in angle cell (ANG\_C#1), VOBUs are arranged consecutively as video data used to show only the batter on the screen to

view the batting form of the batter, and that in angle cell (ANG\_C#9), VOBUs are arranged consecutively as video data used to show only the expression of the pitcher on the screen. When the user is viewing angle cell #j (ANG\_C#j) and changes to angle cell #1 the moment the batter hit the ball, that is, changes to the angle at which only the batter is shown, at the moment the batter made a hit, this switches to a screen where the batter starts swinging a bat before making the hit, not to a screen showing only the batter after he made a hit. Furthermore, when the user is viewing angle cell #j (ANG\_C#j) and changes to angle cell #9 the moment the batter hit the ball, that is, changes to the angle at which only the pitcher is shown, at the moment the batter made a hit, this causes the pitcher's expression at the moment the batter made a hit to appear on the screen, enabling the user to read a change in the pitcher's mental state in his expression.

The DSI data (DSI) 115 in the DSI packet 117 shown in FIG. 25 is the navigation data used to search for a VOB unit (VOBU) 85. The DSI data (DSI) 115 contains the DSI general information (DSI\_GI), angle information (SML\_AGLI), VOB search information (VOBU\_SI), and the synchronizing playback information (SYNCL).

The DSI information (DSI\_GI) contains information about the entire DSI data 115. Specifically, as shown in FIG. 32, the DSI general information (DSI\_GI) contains the system clock reference for the NV pack (NV\_PCK\_SCR) 86. The system clock reference (NV\_PCK\_SCR) is stored in the system time clock (STC) 54A, 58A, 60A or 62A built in each section of FIG. 1. On the basis of the STC 54A, 58A, 60A, 62A, video, audio, and sub-picture packs are decoded at the video, audio, and sub-picture decoders 58, 60, and 62 and the monitor 6 and the speaker 8 reproduce images and sound, respectively. The DSI general information (DSI\_GI) contains the start address (NV\_PCK\_LBN) of the NV pack (NV\_PCK) 86 containing the DSI data expressed by the number of logical sectors (RLSN), relative to the first logical sector in the VOB set (VOBS) 82 containing the DSI, and the address (VOBU\_EA) of the last pack in the VOB unit (VOBU) 85 containing the DSI data expressed by the number of logical sectors (RLSN), relative to the first logical sector in the VOB unit (VOBU) 85.

Furthermore, the DSI general information (DSI\_GI) contains the end address (VOBU\_IP\_EA) of the V pack (V\_PCK) 88 containing the last data item for the first I picture in the VOB unit (VOBU) expressed by the number of logical sectors (RLSN), relative to the first logical sector in the VOB unit (VOBU) 85 containing the DSI data, and the identification number (VOBU\_IP\_EA) of the VOB 83 containing the DSI and the identification number (VOBU\_C\_IDN) of the cell 84 in which the DSI data is recorded.

Like the angle information (NSLS\_ANGLI) in PCI 113, the angle information (SML\_AGLI) contains as many start addresses (SML\_ANGLI\_DSTA) of angle

cells at jump destinations as the number of angles, as shown in FIG. 33. Each of the start addresses is represented by a logical sector relative to the logical sector in the NV pack 86 in which the DSI 115 is recorded. When the angle is changed on the basis of the angle information (SML\_AGLI), the angle information (SML\_ANGLEI) contains the start address of the cell 84 in another angle block after the playback time of the VOB 85 in which the DSI data 115 is recorded, as shown in FIG. 34.

When the angle information (SML\_ANGLE1) in DSI data 113 is used, the angle is changed, cell by cell, whereas PCI can be changed on the basis of a video object unit (VOBU) 85. Namely, consecutive changes of the angle are described in the angle information (SML\_ANGLE1) in DSI data 115, whereas discontinuous changes of the angle are described in the angle information (SML\_ANGLE1) in PCI data 113. In the above example of baseball, the angle is changed as follows. It is assumed that angle cell #j (AGL\_C#j) 84 contains a stream of video data for a series of scenes where the pitcher throws a ball, the batter hits the ball, and the ball lands in the stands, filmed from the infield, and that angle cell #1 contains a stream of video data for a series of the same scenes filmed from the outfield. Furthermore, angle cell #9 is assumed to be a stream of video data as to how the team to which the batter belongs looks in connection with a series of the above scenes. When the user is viewing angle cell #j (AGL\_C#j) and changes to angle cell #1 the instant the batter made a hit, that is, changes to a scene from the outfield the instant the batter hit the ball, he or she can switch to consecutive scenes where the ball is flying closer to the outfield after the batter hit the ball. Furthermore, when the user is viewing angle cell #j (AGL\_C#j) and changes to angle cell #9 the moment the ball landed in the stands, that is, changes to an angle at which how the batter's team looks is shown on the screen, the team cheering for the home run and the baseball manager's expression are displayed on the screen. When the angle information (NSLS\_ANGLEI) in PCI data 113 and the angle information (SML\_ANGLEI) in DSI data 115 are used, it is apparent that a different scene is played back.

The search information (VOBU\_SI) in VOB 85 contains information used to identify the first address in a cell 84 as shown in FIG. 35A. Specifically, the search information (VOBU\_SI) in VOB 85 contains the start addresses (A\_FWDn) of +1 to +20, +60, +120, and +240 VOB units (VOBU) 85 as forward addresses (FWDAn) in the order of playback on the basis of the VOB unit (VOBU) 85 containing the DSI 115 as shown in FIG. 35A, the forward addresses being expressed by the number of logical sectors, relative to the first logical sector in the VOB unit.

Each forward address (FWDAn) contains 32 bits as shown in FIG. 35B. Bit number 29 (b29) to bit number 0 (b0) are assigned to its address, for example, the address of forward address 10 (FWDAn10). At the head of

the forward address (FWDAn), a flag (V\_FWD\_Exist1) indicating whether the video data exists in the video object unit (VOBU) 85 corresponding to the forward address (FWDAn) and a flag (V\_FWD\_Exist2) indicating whether the video data exists in the video object unit between the current address and the forward address (FWDAn). Specifically, V\_FWD\_Exist1 corresponds to bit number (b31). When this flag is at 0, this means that there is no video data in the video object unit (VOBU) specified by the address (FWDAn) written in bit number 29 to bit number 0. When this flag is at 1, this means that there is video data in the video object unit (VOBU) specified by the forward address (FWDAn) written in bit number 29 to bit number 0. For example, if forward address 10 (FWD10) has video data, the flag will be up (1) in V\_FWD\_Exist1 of the 31st bit. If the address has no video data, the flag will be down (0) in V\_FWD\_Exist1 of the 31st bit. Furthermore, V\_FWD\_Exist2 corresponds to bit number (b30). When this flag is at 0, this means that there is video data in none of the video object units between the current address and the forwarding address (FWDAn). Specifically, V\_FWD\_Exist 2 corresponds to bit number (b30). When this flag is at 0, this means that there is no video data in the video object units (VOBU) 85 between the forward address (FWDAn) written in bit number 29 to bit number 0 and current address. When this flag is at 1, this means that there is video data in at least one of the video object units (VOBU) 85 between them. For example, if there is video data in a plurality of video object units 85 between forward address 1 and forward address 9, the flag will be up (1) in V\_FWD\_Exist2 of the 30th bit. If the address has no video data, the flag will be down (0) in V\_FWD\_Exist2 of the 30th bit.

Furthermore, the VOB search information (VOBU\_SI) contains the start addresses (A\_BWDn) of -1 to -20, -60, -120, and -240 VOB units (VOBU) 85 as backward addresses (BWDAn) in the reverse order of playback on the basis of the VOB unit (VOBU) 85 containing the DSI as shown in FIG. 35A, the backward addresses being expressed by the number of logical sectors, relative to the first logical sector in the VOB unit 85.

Each backward address (BWDAn) contains 32 bits as shown in FIG. 35C. Bit number 29 (b29) to bit number 0 (b0) are assigned to its address, for example, the address of backward address 10 (BWDAn10). At the head of the backward address (BWDAn), a flag (V\_BWD\_Exist1) indicating whether the video data exists in the video object unit (VOBU) 85 corresponding to the backward address (BWDAn) and a flag (V\_BWD\_Exist2) indicating whether the video data exists in the video object units between the backward address (BWDAn) and the current address. Specifically, V\_BWD\_Exist1 corresponds to bit number (b31). When this flag is at 0, this means that there is no video data in the video object unit (VOBU) 85 specified by the address (BWDAn) written in bit number 29 to bit number 0. When this flag is at 1, this means that there is video data in the

video object unit (VOBU) specified by the address (BWDA<sub>n</sub>) written in bit number 29 to bit number 0. For example, if backward address 10 (BWDA10) has video data, the flag will be up (1) in V\_BWD\_Exist1 of the 31st bit. If the address has no video data, the flag will be down (0) in V\_BWD\_Exist1 of the 31st bit. Furthermore, V\_BWD\_Exist2 corresponds to bit number (b30). When this flag is at 0, this means that there is video data in none of the video object units between the backward address (BWDA<sub>n</sub>) written in bit number 29 to bit number 0 and the current address. When this flag is at 1, this means that there is video data in at least one of the video object units (VOBU) 85. For example, if there is video data in video object units between the backward address 10 (BWDA10) and the current address 0, the flag will be up (1) in V\_BWD\_Exist2 of the 30th bit. If the address has no video data, the flag will be down (0) in V\_BWD\_Exist2 of the 30th bit.

The synchronizing information (SYNCl) contains address information on the sub-pictures and audio data reproduced in synchronization with the playback start time of the video data in the VOB unit (VOBU) 85 containing the DSI data. Specifically, as shown in FIG. 36, the start address (A\_SYNCA) of the target audio pack (A\_PCK) is expressed by the number of logical sectors (RLSN), relative to the NV pack (NV\_PCK) 86 in which DSI data 115 is recorded. When there are more than one audio stream (8 audio streams maximum), as many pieces of the synchronizing information (SYNCl) as there are audio streams are written. Furthermore, the synchronizing information (SYNCl) contains the address (SP\_SYNCA) of the NV pack (NV\_PCK) 86 of the VOB unit (VOBU) 85 containing the target sub-picture pack (SP\_PCK) 90, the address being expressed by the number of logical sectors (RLSN), relative to the NV pack (NV\_PCK) 86 in which DSI 115 is recorded. When there are more than one sub-picture stream (32 sub-picture streams maximum), as many pieces of the synchronizing information (SYNCl) as there are sub-picture streams are written.

Hereinafter, the operation of reproducing the movie data from the optical disk 10 with the logical formats shown in FIGS. 4 to 36 will be explained with reference to FIG. 1. In FIG. 1, the solid-line arrows indicate data buses and the broken-line arrows represent control buses.

With the optical disk apparatus of FIG. 1, when the power supply is turned on and an optical disk 10 is loaded, the system CPU section 50 reads the initial operation program from the system ROM/RAM 52 and operates the disk drive section 30. Then, the disk drive section 30 starts to read the data from the lead-in area 27 and then from the volume and file structure area 70 following the lead-in area 27 and determining a volume structure and a file structure in accordance with ISO-9660. Specifically, to read the data from the volume and file structure area 70 located in a specific position on the optical disk 10 set in the disk drive section 30, the sys-

tem CPU section 50 gives a read instruction to the disk drive section 30 to read the contents of the volume and file structure area 70, and stores the data temporarily in the data RAM section 56 via the system processor section 54. The system CPU section 50 extracts information about the recording position and recording size of each file and management information necessary for other managing actions, and transfers and stores in specific locations in the system ROM/RAM section 52.

Then, the system CPU section 50 acquires a video manager 71 composed of files, starting with file number 0, with reference to the information about the recording position and recording capacity of each file in the system ROM/RAM section 52. Specifically, referring to the recording position and recording capacity of each file acquired from the system ROM/RAM section 52, the system CPU section 50 gives a read instruction to the disk drive section 30, acquires the positions and sizes of a plurality of files constituting the video manager 71 existing on the root directory, reads the video manager 71, and stores it in the data RAM section 56 via the system processor section 54. A volume manager information management table (VMGI\_MAT) 78, the first table in the video manager 71, is searched for. By the search, the start address (VMGM\_VOBS\_SA) of the video object set (VMGM\_VOBS) 76 for the video manager menu (VMGM) is obtained and the video object set (VMGM\_VOBS) 76 is reproduced. Because the playback of the video object set (VMGM\_VOBS) for menus is the same as that of the video object set (VTSM\_VOBS) for titles in the video title set (VTS), its playback procedure will be omitted. When a language is set in the video object set (VMGM\_VOBS) 76, or when there is no video manager menu (VMGM), the volume manager information management table (VMGI\_MAT) is searched for and the start address (TT\_SRPT\_SA) of the title set search pointer table (TT\_SRPT) 79 is retrieved.

By the retrieval, the title set search pointer table (TT\_SRPT) 79 is transferred to a particular location in the system ROM/RAM section 52 and stored there. Next, the system CPU section 50 acquires the end address of the title search pointer table (TT\_SRPT) 79 from the title search pointer table information (TSPTI) 92 and also obtains the video title set number (VTSN) corresponding to the input number, the program chain number (PGCN), and the start address (VTS\_SA) of the video title set from the title search pointer (TT\_SRP) 93 according to the input number from the key input section 4. When there is only one title set, one title search pointer (TT\_SRP) 93 is searched for, regardless of whether the input number has been entered from the key input section 4, and the start address (VTS\_SA) of the title set is acquired. From the start address (VTS\_SA) of the title set, the system CPU section 50 acquires the target title set.

The system CPU 50 acquires the number of video streams, audio streams, and sub-picture streams for

volume menus written in the information management table (VMGI-MAT) 78 in the volume manager (VMGI) 75 and their attribute information, and on the basis of the attribute information, sets parameters for playback of video manager menus in the video decoder 58, audio decoder 60, and sub-picture decoder 62.

Next, from the start address (VTS\_SA) of the video title set 72 of FIG. 11, the video title set information (VTSI) 94 about the title set is obtained as shown in FIG. 12. The end address (VTI\_MAT\_EA) of the video title set information management table (VTSI\_MAT) 98 of FIG. 13 is acquired from the management table (VTSI\_MAT) 98 of the video title set information (VTSI) 94. At the same time, each section of the reproducing unit shown in FIG. 1 is set on the basis of the number of audio streams and the number of sub-picture data streams (VTS\_AST\_Ns, VTS\_SPST\_Ns) and the attribute information on the video, audio, and sub-picture data (VTS, V\_ATTR, VTS\_A\_ATTR, VTS\_SPST\_ATTR).

When a menu (VTSM) for a video title set (VTS) has a simple structure, the start address (VTSM\_NOB\_SA) of a video object set (VTSM\_VOB) for menus for a video title set is acquired from the video title set information management table (VTSI\_MAT) 98 of FIG. 13. On the basis of the video object set (VTSM\_VOB) 95, a menu for the video title set is displayed. When an video object set (VTT\_VOBS) 96 for titles (VTST) in the title set (VTS) is simply reproduced without selecting a program chain (PGC) with reference to the menu, the video object set 96 is reproduced on the basis of the start address (VTSTT\_VOB\_SA) shown in FIG. 13.

When a program chain is specified from the key/display section 4, the desired program chain 87 is retrieved in the following procedure. The retrieval of a program chain 87 is not limited to a program chain 87 for titles in the video title set. The same procedure applies to the retrieval of a program chain 87 for a relatively complex menu made up of program chains 87. The start address of the program chain information table (VTS\_PGCIT) 100 in the video title set (VTS) of FIG. 13 written in the management table (VTSI\_MAT) 98 of the video title set information (VTSI) 94 is acquired, and the information (VTS\_PGCIT\_I) 102 in the VTS program chain information table 100 of FIG. 14 is read. From the information (VTS\_PGCIT\_I)\_104, the number of program chains (VTS\_PGCIT\_Ns) and the end address (VTS\_PGCIT\_EA) of the table 100 shown in FIG. 15 are obtained.

When the number of a program chain 87 is specified from the key/display section 4, the category of the program chain 87 and the start address of the VTS\_PGC information 104 corresponding to the search pointer (VTS\_PGCIT\_SRP) 103 shown in FIG. 16 are acquired from the VTS\_PGCIT search pointer (VTS\_PGCIT\_SRP) 103 corresponding to the number shown in FIG. 14. On the basis of the start address (VTS\_PGCIT\_SA), the program chain general information (PGC\_GI) of FIG. 17 is read out. According to the

general information (PGC\_GI) 105, the category and playback time of the program chain (PGC) (PGC\_CAT, PGC\_PB\_TIME) are obtained and further the start addresses (C\_PBIT\_SA, C\_POSIT\_SA) of the cell playback information table (C\_PBIT) and cell position information table (C\_POSIT) 108 contained in the general information (PGC\_GI) are acquired. From the start address (C\_PBIT\_SA), the video object identifier (C\_VOB\_IDN) and cell identifier (C\_IDN) of FIG. 24 are acquired as the cell position information (C\_POSI) of FIG. 23.

Furthermore, from the start address (C\_POSIT\_SA), the cell playback information (C\_PBI) of FIG. 21 is obtained. The start address (C\_FVOBU\_SA) of the first VOB 85 and the start address (C\_IVOBU\_SA) of the last VOB in the cell of FIG. 22 contained in the playback information (C\_PBI) are acquired. Then, the target cell is retrieved. In the playback of cells, referring to the program map of FIG. 19 in the PGC program map (PGC\_PGMAP) 106 of FIG. 17, playback cells 84 are determined one after another. The data cells of program chains thus determined are read one after another from the video object 144 and inputted to the data RAM section 56 via the system processor section 54. The data cells 84, on the basis of the playback time information, are supplied to the video decoder section 58, audio decoder section 60, and sub-picture decoder section 62, which decode them. The decoded signals are subjected to signal conversion at the D/A and data-reproducing section 64 and an image is reproduced at the monitor section 6 and at the same time, sound is reproduced at the speaker sections 8, 9.

Furthermore, a normal playback and high-speed search of the video data using a navigation pack 86 will be described in detail with reference to a flowchart.

In a normal playback of video data, when a normal playback is started as shown in FIGS. 37A and 37B, after the start-up at step S11, the video manager information (VMGI) 75, as explained earlier, is retrieved by the system CPU section 50 and stored in the system ROM/RAM section 52. On the basis of the video manager information (VMGI) 75, the video title set information (VTSI) 94 on the video title set (VTS) 72 is read and simultaneously the video title set menu is displayed on the monitor section 6 using the video object set (VYTSM\_VOBS) 95. On the basis of the display, as shown in step S13, the user selects a title set 72 to be reproduced and playback conditions. When the decided title 72 is selected using the key/display section 4, as shown in step S14, the data in the cell playback information table (C\_PBIT) 107 of FIGS. 17, 21, and 22 is read by the system CPU section 50 from the program chain information table (VTS\_PGCIT) 100 of FIG. 12 in the selected title set 72. The read-out data is stored in the system ROM/RAM section 52. According to the playback conditions, the system CPU section 50 determines a program chain number (VTS\_PGC\_Ns), angle number (ANGNs), audio stream number, and sub-pic-

ture stream number. For example, the eleventh boxing match for a world championship is selected as a title for a program chain and it is determined that Japanese subtitles are displayed as sub-pictures with English narration. The user selects an angle so that a match between the champion and the opponent may be viewed impressively. The determined sub-picture number and audio stream number are set in the register of the system processor section 54 as shown in step S16. Similarly, the playback start time is set in the system time clock in each of the system processor section 54, video decoder 58, audio decoder 60, and sub-picture decoder 62. The start address of the first VOB in a cell and PGC number, or cell number, are stored in the system ROM/RAM section 52.

As shown in step S17, at the time when a preparation to read a video title set has been made, the system CPU section 50 gives a read command to the disk drive section 30, which searches the optical disk 10 on the basis of the above start address and PGC number. By the read command, the cells 84 related to the specified program chain (PGC) are read one after another from the optical disk 10, and are transferred to the data RAM section 56 via the system CPU section 50 and system processing section 54. The transferred cell data includes a navigation pack 86 which is, as shown in FIG. 6, the head pack of the video object unit (VOBU) 85. The navigation pack 86 is stored into the data RAM 56. Thereafter, the video pack 88, audio pack 91, and sub-picture pack 90 in the video object unit (VOBU) are distributed to the video decoder section 58, audio decoder section 60, and sub-picture decoder section 62, respectively. The individual decoders decode the packs and supply the resulting signals to the D/A and data-reproducing section 64. As a result, a video signal is sent to the monitor 6 and an audio signal is transmitted to the speaker 8, thereby starting the display of images with sub-pictures. At the same time, the reproduction of sound is started.

If a key input is supplied from the key/display section 4 during the video and audio reproduction, the key data acquired is stored into the system RAM/ROM section 52. If there is no key input from the section 4, it is determined in step S19 whether or not a playback end message has been supplied from the drive section 30. If the message has been supplied, it is determined whether or not a navigation pack 86 has been transferred to the system ROM/RAM section 52. If the navigation pack 86 has been transferred to the section 52, the logical sector number (NV\_PCK\_LSN) in the navigation pack 86 is stored as current logical block number (NOWLBN) into the system RAM/ROM section 52 in step 21.

After the NV pack has been transferred, it is determined whether the NV pack is the last one in the cell 84. More precisely, in step S22 it is determined whether or not the NV pack is the last navigation pack 86 in the cell 84. This is effected by comparing the start address

(C\_LVOBU\_SA) of the cell playback table (C\_PBI) 107 with the address (V\_PCK\_LBN) of the navigation pack 86. If the NV 86 is not the last one in the cell 84, control will return to step S18. If the NV pack 86 is the last one in the cell 84, control goes to step S23. In step S23 it is verified whether there is an angle change. An angle change is judged on the basis of whether an angle change is inputted from the key/display section 4 to the system CPU section 50. If there is no angle change, as shown in step S24, it will be verified whether it is the end cell of the program chain (PGC) to which the cell 84 belongs. The verification is effected on the basis of whether the cell 84 shown in FIGS. 17 and 21 is the end cell in the cell playback information table (C\_PBIT) 107. Namely, the verification is achieved on the basis of the number of cells 84 constituting the program chain and the identification number of the reproduced cell. If the cell does not correspond to the end cell of the program chain (PGC), control will be returned to step S18.

If the cell 84 is the end cell of the program chain (PGC), it will be determined that the program chain has finished and the next program chain (PGC) will be specified. Except for special cases, the program chains are reproduced in the sequence of their numbers, so that adding 1 to the number of the program chain that has been reproduced enables the number of a program chain to be reproduced next to be set. Whether there is a program chain whose program number is the set program chain number is verified at step S26. If there is no program chain to be reproduced next, control will be passed to the flow for the playback end procedure shown in FIG. 38 explained later. If the set program chain is present, as shown in step S27, the address of the cell in the program chain that has been set again, that is, the start address (C\_FVOBU\_SA) of C\_FVOBU in the cell playback information (C\_PBI) 107 of FIG. 22 is obtained as the present logical block number. As shown in step S28, it is verified whether the start address (C\_FVOBU\_SA) is equal to the address obtained by adding 1 to the end address (ENDLBN) of the cell 84 in the preceding program chain already reproduced. If they are equal to each other, this means the playback of cells having consecutive addresses and control will return to step S18. If those addresses are not equal, this means that addresses of the cells are not consecutive. In this case in step S29, the system CPU section 50 issues a read end address command and temporarily stops the reading operation of the disk drive section 30. The read end address command designates the end address of the current video object unit. Thereafter, in step S30, the system CPU section 50 gives a consecutive read command again to the disk drive section 30. Then, control return to step S18, thereby starting the retrieval of a navigation pack 86.

If a key input is supplied from the key/display section 4 at step S18, it will be confirmed in step S31 whether the key input is for fast-forward (FF), for example. If it is for fast-forward (FF), a high-speed searching proc-

ess will be executed in step S32. If it is not for fast-forward, another process, or a process related to a series of video playback, such as a pause in playback or the change of audio streams, will be carried out at step S9. Then, control returns to step S19.

If the end of playback has been specified in step S19, or if there is no program chain to be reproduced next in step S26, the end PTS (VOBU\_EPTS) contained in the PCI general information (PCI\_GI) is referred to in step S51 (FIG. 38). When the end PTS (VOBU\_EPTS) coincides with the system time clock (STC), the monitor 6 will stop displaying on the screen as shown in step S52, then the system CPU will supply a data transfer stop command to the disk drive section 30, which thereby stops the data transfer, terminating the playback operation.

If an angle change input is supplied from the key/display section 4 in step S23, it will be checked whether there is angle data as shown in step S40 of FIG. 40. The presence/absence of angle has been given as angle information (NSULS\_ANGLE, SML\_AGLI) to both of the PCI data 113 and DSI data 115 in the navigation pack 86. If there is no angle to be changed in step S40, the message that there is no angle data will be displayed on the key/display section 4 or the monitor 6 as shown in step S41. After the message for no angle data is displayed, control goes to step S24. If there is angle data, as shown in step S42, an angle number to be changed will be specified from the key/display section 4. In this case, as explained earlier, it will be specified which of the angle information in the PCI data and the DSI data (NSULS\_ANGLEI, SML\_AGLI) is used to change the angle. When only one type of angle information is available, the selection is limited to the one type. If an angle number is specified, the target addresses (NSLS\_ANGLEI, SML\_ANGLEI) of the angle cell corresponding to the specified angle number as shown in FIGS. 29 and 30 will be acquired at step S43. By this address, a cell is searched for. The address is set for the logical block number (NOWLBN) to be searched for. With the angle change operation using the PCI data, the system CPU section 50 performs a muting process on the playback of video and audio data and also effects a pause process on the playback of sub-pictures. These processes stop the system time clock (STC) in each section of the reproducing system and make it possible to take in the angle data already changed by clearing the buffers in the video, audio, and sub-picture decoders 58, 60, and 62. At the same time, as shown in step S45, the system CPU section 50 issues a read end address command and temporarily prevents the disk drive section 30 from reading the data. Thereafter, as shown in step S46, the CPU section 50 supplies a read command to the disk drive section 30. Then, the selected cell is searched for by the set retrieval logical block number, or by the start address of the cell, the cell data is retrieved consecutively. The transfer of the data in the selected angle cell is then started.

After the transfer has been started, it is checked again, in step S47 whether a playback end has been specified and control waits for the transfer of the navigation pack of the first cell associated with the changed angle. As shown in step S48, it is checked whether a navigation pack has been transferred as a result of the data transfer. If no navigation pack has been transferred, control will be returned to step S47. If a navigation pack has been transferred, each system time clock (STC) will be set with reference to the SCR in the NV pack (NV\_PCK\_SCR) contained in the DSI general information (DSIG) in the navigation pack 86. Thereafter, the video and audio muting state and the pause state of sub-pictures are canceled at step S50 and then the system time clock (STC) starts. Then, step S21 of FIG. 37A is executed as in a normal playback.

When an interrupt process is started as shown in step S33, the interrupt state will be stored in the system ROM/RAM section 52 in step S34. Next, it is confirmed whether the interrupt state is of timer interrupt. If it is not a timer interrupt, control will be passed to step S37. If it is a timer interrupt, the contents of the current system clock (STC) 58A, 60A, 62A will be read from the MPEG decoder sections 58, 60, 62, that is, one of the video, audio, and sub-picture decoder sections 58, 60, and 62 and the read-out value will be allowed to appear on the display section, for example, on the monitor section 6 or the key/display section 4. Thereafter, at step S37, it is verified whether it is a key interrupt. If it is a key interrupt, the data for the key input will be stored in the system RAM/ROM. If it is not a key interrupt, as shown in step S39, control will be returned to the original state at the time when the interrupt occurred, in step S39 after the storage of the key input data.

Next, the high-speed search operation of an image to be reproduced will be described with reference to FIGS. 42A, 42B, 42C, and 42D. In a high-speed search of an image to be reproduced, it is assumed that image data items are skipped at regular intervals of 10 video object units (VOBU). When at step S55, an operation flow of a high-speed search starts, the system CPU section 50, at step S56, will instruct the respective decoders 58, 60, and 62 in the reproducing system to perform the processes for high-speed searching. Under the instruction, only the I picture is played back from the video pack, whereas the audio and sub-picture data are muted forcibly and not reproduced. Furthermore, the counter is prohibited from appearing on the monitor section 6 or the key/display section 4 and the system clock is prevented from operating.

After the search is started, it is checked in step S59 whether the navigation pack 86 of the video object unit (VOBU) 8 has been transferred or not. If No, the control returns to step S57, in which the transfer of the navigation pack 86 is waited for. The control then goes to step S58. If Yes in step S59, the control goes to step S60. In step S60, the logic block number (NV\_PCK\_LBN) shown in FIG. 32 and the forward address (FWDA1 to



FWDA<sub>n</sub>) shown in FIG. 35 are acquired and stored into the system ROM/RAM 52.

Next, as shown in step S62, the value of NV pack SCR (NV\_PCK\_SCR) is displayed on the monitor section 6 or the key/display section 4. Seeing the display, the user can know the time at the reproducing section in which the video data is being searched for. After the display, it is confirmed at step S63 whether the I picture of the video data in the video object unit (VOBU) to which the NV pack belongs has been reproduced. In other words, the system CPU section 50 waits for the information indicating that the video decoder section 58 has reproduced the I picture used as status data. If the reproduction of I picture has been completed, it will be verified, as shown in step 64, whether the forward address (FWDA10 [b29:b0]) has been written in from bit 29 to bit 0. If the forward address has not been written (FWDA10 [b29:b0] = 0), control will be advanced to step S80 explained later with reference to FIG. 42C. If the forward address has been written (FWDA10 [b29:b0] ≠ 0), it will be verified in the next step S65 whether there is video data in the video object unit (VOBU) at the forward address 10. If there is no video data (FWDA10 [b31] = 0), control will be advanced to step 90 explained later with reference to FIG. 42D. If there is video data (FWDA10 [b31] ≠ 0), the forward address (FWDA10 [b29:b0]) will be determined to be the current relative logical block number and the video object unit at the start address will be searched for.

Then, at step S67, it is checked whether the high-speed search has been completed. If the high-speed search has not been completed, at step S68, a data transfer cancel command will be given to the drive section 30 and control will be returned again to step S57. If the high-speed search has been completed at step S67, a read command will be given to the drive section 30 in step S69 of FIG. 42B. In step S70 it will be checked whether the reproduction has been completed. If the reproduction has been completed, step S51 shown in FIG. 38 will be executed. If the reproduction has not been completed, it will be checked at step S71 whether the NV pack has been transferred. If it has not been transferred, control will wait for the NV pack to be transferred. If the NV pack has been transferred, the address of the NV pack will be stored in the system ROM/RAM section 52 as shown in step S72. If the address coincides with the relative logical block (NOWLBN) being searched for, an instruction for an ordinary playback process will be given to the respective decoders 58, 60, and 62, which will be set in the normal playback mode, and control will be passed to step S21 shown in FIG. 37A. If at step S37, the address of NV pack does not coincide with the relative logical block (NOWLBN) being searched for, control will return to step S69 and the NA pack will be searched for until the address has coincided with the block.

If at step S64, there is no description of forward address in forward address 10 (FWDA10 [b29:b0] = 0), it

will be checked as shown in step S80 of FIG. 42C whether there is a description of forward address in forward address 9 (FWDA10 [b29:b0] = 0). If there is no address description, it will be confirmed at step S81 whether there is a description of forward address in forward address 8. As shown in steps S82 to S88, if there is no description of forward address, the number of the forward address will be decremented by 1 until forward address 1 has been checked. If the description does not exist in forward address S88 either as shown in step S88, control will be passed to step S121 explained later in FIG. 42E. Furthermore, in step S80, if there is a description of forward address in forward address 9 (FWDA10 [b29:b0] = 1), control will be passed to step S91 of FIG. 42D. If in steps S82 to S88, there is a description of forward address in forward addresses 8 to 1 (FWDA 8 to FWDA 1 [b29:b0] = 1), control will be passed to the corresponding step S93, S95, S97, S99, S101, or S103 shown in FIG. 42D.

If there is no video data in the forward address (FWDA10) (FWDA10 [b31] = 0) in step S65 of FIG. 42A, control will be advanced to step S90 shown in FIG. 42D. In step S90, it is checked whether there is video data in the range from forward address (FWDA10) to forward address (FWDA1) (FWDA10 [b30] = 1). If there is no video data in the range, control will go to step S124 shown in FIG. 42F.

If there is video data in the range (FWDA10 [b30] = 1), it will be confirmed as shown in step S91 whether there is no video data in forward address 9 obtained by decrementing forward address 10 by 1 (FWDA9 [b31] = 0). If there is video data in forward address 9 (FWDA9 [b31] = 0), at step S110, the forward address (FWD9 [b29:b0]) will be set in the relative logical block (NOWLBN) to be searched for and control will be returned to step S67. If there is no video data in FWDA9 in step S91 (FWDA9 [b31] = 0), it will be checked as shown in step S92 whether there is video data in the range from forward address (FWDA8) to forward address (FWDA1) (FWDA9 [b30] = 1). If there is video data in the range (FWDA9 [b30] = 1), steps S93 to 108 will be repeated. If there is no video data in the range, control will go to step S124. If there is video data in steps S93 to S108, control will be passed to any one of steps S111 to S119 that is similar to step S110.

If it is found, in steps S90 to S106, that there is no video data, the control goes to step S124 shown in FIG. 42F. In step S124, the address (FWDx) is searched for. It should be noted that no video data of the video object unit is stored at this address (FWDx). Then, the control returns to step S67.

In step S109, it is checked whether the cell to which the video object unit (VOBU) containing the DSI belongs is the end cell in the program chain. Specifically, on the basis of the cell playback information table (C\_PBIT) of FIG. 21 to which the program chain information (VTS\_PGCI) of FIG. 17 belongs, it will be checked whether the cell is the end cell. If the cell is found to be

the end cell, as shown in step S121, a 1 will be added to the program chain number to which the cell to be searched for and the next program chain will be set. At step S122, it is confirmed whether there is a program chain corresponding to the set number. The presence/absence of the program chain is determined by referring to the PGCCI table search pointer (VTS\_PGCIT\_SRP) contained in the PGC information (VTS\_PGCI) of FIG. 17. If the corresponding program chain does not exist at step S122, control will be passed to step S51 of FIG. 38. If the corresponding program chain exists, the entry cell of the program chain will be identified. Then, as shown in step S123, the address (C\_FVOBU\_SA) of the cell will be determined to be the logical block number to be searched for and control will be passed to step S57.

If at step S109, the cell the video object unit (VOBU) containing the DSI is not the end cell of the program chain, at step S120, the cell playback information table (C\_PBIT) will be searched, the cell to be reproduced next be identified, the address of the cell be determined to be the logic block number to be searched for, and control will be passed to step S57.

The above high-speed searching operation has been explained with reference to the flowchart for an example of fast-forward. Because a backward action is also carried out by similarly referring to the addresses and flags shown in FIGS. 35A and 35C, its explanation will be omitted. Although in the fast-forward search, a method of decreasing the addresses is used in steps S90 to S108, a method of increasing the addresses may be used.

Next, another example of high-speed search will be described with reference to FIG. 43. In FIG. 43, the steps marked with the same symbols as those shown in FIGS. 42A to 42E indicate the same steps and explanation of them will not be given. At step S62 of FIG. 43, the value of the NV pack SCR (NV\_PCK\_SCR) is allowed to appear on the monitor 6 or the key/display section 4. From the displayed value, the user knows the time of the playback portion of the video presently being searched for. Thereafter, as shown in step 161, the address (VOBU\_IP\_EA) of the video pack in which the end data of the first I picture in the DSI of FIG. 32 is determined to be the address (ENDLBN) to be searched for. On the basis of the address, the video data is searched for and the video data for the I picture is acquired. After the address is retrieved, a read end command is given to the drive section 30 in step S162, causing the drive section to temporarily stop reading at the address. At step S164, it is checked whether the transfer of the data related to the I picture has been completed. If the transfer of the data has not been completed, the transfer of the data will be waited for. While the I picture is being displayed after the transfer of the data, it is confirmed whether video data exists in the location 10 addresses beyond the current address, that is, in address FWDA10 and whether video data exists between the current address and address FWDA10. If there is no video data (FWDA10

[b31,b30] = 00), control will be passed to step S80 of FIG. 42C. If there is video data, at step S66, the forward address (FWDA10 [b29:0]) will be changed to the address to be searched for (NOWLBN). Thereafter, it is verified whether the high-speed search has finished, for example, whether the user has stopped pressing the FF button in the key/display section 4. If the high-speed search has not finished, step S57 will be started using the updated search address and steps S58 to S66 will be repeated. If the high-speed search has ended at step S67 of FIG. 42B, step S69 will be executed.

Furthermore, the operation of reproducing the video from the scene 30 minutes away from the start of playback will be explained with reference to FIG. 44. In FIG. 44, the flows marked with the same symbols and numerals as those in FIGS. 37A and 37B indicate the same operations and their explanation will be omitted. In the operation flow of FIG. 44, after steps S11 to S15 have been executed, at step S171, a program chain corresponding to a specific time later, for example, 30 minutes later, is determined using the program chain playback time (PG\_PB\_TIME) of FIG. 18. On the basis of the cell playback time (C\_PBI) of FIG. 22 in the program chain, a value closest to the target time is decided and at the same time, a cell to be reproduced is determined. As shown in step S172, on the basis of the cell decision, the sup-picture stream number and the audio stream number are transferred to the system processor section 54, the start address and the program chain number are stored in the system ROM/RAM section 52, and the system time clock (STC) is stopped temporarily. Next, as shown in step S173, the main system CPU section 50 gives a read command to the drive section 30 to cause it to search for the cell to be retrieved.

In step S174, it is checked whether the NV pack in the first VOB in the cell has been transferred. If the NV pack has not been transferred, the transfer of the NV pack will be waited for. If the NV pack has been transferred, its SCR (NV\_PCK\_SCR) is stored in the system ROM/RAM 52. In step S176, the system CPU section 50 determines whether or not the system ROM/RAM 52 stores the SCR (NV\_PCK\_SCR) of the NV pack 86 having the address immediately preceding the address of the NV pack transferred. If No, the address of the next NV pack is determined in step S177, for there is no object to compare. Then, the transfer of the NV pack 86 of the next address is waited for.

When the next NV pack 86 is transferred, it is checked in step S176 whether or not the SCR (NV\_PCK\_SCR) of the NV pack 86 transferred has passed the target time. If No in step S176, the address of the next NV pack is determined in step S177, and the transfer of the NV pack 86 of the next address is waited for. If Yes, in step S176, it is determined which one of the SCRs (NV\_PCK\_SCR) stored in the system ROM/RAM 52 is the closest to the target time, but not passing over the target time. The address of the NV pack having the SCR closest to the target time is stored into the sys-

tem ROM/RAM 52. The control then goes to step S178, in which a read command at the address of this NV pack is supplied to the drive section 30. In step S179, the transfer of the NV pack is waited for. After the NV pack has been transferred, the reference time SCR (NV\_PCK\_SCR) in the NV pack is set in the STC at step S180, which then starts to count the time. Thereafter, control is passed to step S21 of FIG. 37A, where playback is started at the retrieved cell.

Next, the video data in the logic formats shown in FIGS. 4 to 35C, a method of recording data on the optical disk 10 to reproduce the video data, and a recording system to which the recording method is applied will be explained with reference to FIGS. 45 to 50.

FIG. 45 shows an encoder system that creates a video file of a title set 84 in which the video data is encoded. In the system of FIG. 45, for example, a videotape recorder (VTR) 201, an audiotape recorder (ATR) 202, and a sub-picture source 203 are used as sources of the main video data, the audio data, and the sub-picture data. Under the control of a system controller (Sys con) 205, they create the main video data, audio data, and sub-picture data, which are supplied to a video encoder (VENC) 206, an audio encoder (AENC) 207, and a sub-picture encoder (SPENC) 208, respectively. Under the control of the system controller (Sys con) 205, these encoders 206, 207, and 208 perform A/D conversion of the main video data, audio data, and sub-picture data and encode them by the respective compression schemes. The encoded main video data, audio data, and sub-picture data (Comp Video, Comp Audio, Comp Sub-pict) are stored in memories 210, 211, and 212. The main video data, audio data, and sub-picture data (Comp Video, Comp Audio, Comp Sub-pict) are outputted to a file formatter (FFMT) 214 under the control of the system controller (Sys con) 205, which converts them so that they may have a file structure of video data for the system as explained earlier. Then, under the control of the system controller (Sys con) 205, the setting conditions for each data item and the management information including attributes are stored in a memory 216 in the form of files.

Explained next will be a standard flow of an encoding process in the system controller (Sys con) 205 that creates a file from video data.

According to the flow of FIG. 46, the main video data and the audio data are encoded and the encoded main video data and audio data (Comp Video, Comp Audio) are supplied. Specifically, when the encoding process is started, as shown in step S270 of FIG. 46, the parameters necessary for encoding the main video data and audio data are set. Part of the set parameters are stored in the system controller (Sys con) 205 and at the same time, are used at the file formatter (FFMT) 214. As shown in step S271, the main video data is pre-encoded using the parameters and the optimum distribution of the amount of codes is calculated. Then, on the basis of the code amount distribution obtained in the pre-encoding,

the main video data is encoded as shown in step S272. At the same time, the audio data is also encoded at step S272. As shown in step S273, if necessary, the main video data is partially encoded again and the reencoded portion of the main video data is replaced with the old one. Through the series of steps, the main video data and audio data are encoded. Furthermore, as shown in steps S274 and S275, the sub-picture data is encoded and the encoded sub-picture data (Comp Sub-pict) is supplied. Namely, the parameters necessary for encoding the sub-picture data is set. As shown in step S274, part of the parameters are stored in the system controller (Sys con) 205 and used in the file formatter (FFMT) 214. On the basis of the parameters, the sub-picture data is encoded. By the process, the sub-picture data is encoded.

According to the flow of FIG. 47, the encoded main video data, audio data, and sub-picture data (Com Video, Com Audio, Comp Sub-pict) are combined and converted so as to form a video data title set structure as explained in FIGS. 4 and 12. Specifically, as shown in step S276, a cell is set as the smallest unit of the video data and cell playback information on a cell (C\_PBI) is created. Then, as shown in step S277, the structure of the cells constituting a program chain and the main video, sub-picture, and audio attributes (the information obtained in encoding the respective data items are used part of these attributes) are set and the video title set information management table information (VTSI\_MAT) 98 containing information on a program chain and a video title set time search map table (VTS\_MAPT) 142 are created. At this time, as the need arises, a video title set direct access pointer table (VTS\_DAPT) is also created. The encoded main video data, audio data, and sub-picture data (Com Video, Com Audio, Comp Sub-pict) are subdivided into specific packs. An NV pack is placed at the head of each VOB unit so that playback can be effected in the order of time code of each data item. With the NV packs arranged this way, each data cell is positioned so that a video object (VOB) may be composed of a plurality of cells as shown in FIG. 6. A set of such video objects is formatted into the title set structure.

In the flow of FIG. 47, the program chain information (PGI) is obtained in the process of step S277 by using the database in the system controller (Sys con) 205 or entering data again as the need arises.

FIG. 48 shows a disk formatter system that records on an optical disk the title set formatted as described above. In the disk formatter system of FIG. 48, the memories 220, 222 in which the created title set is stored supply these file data items to a volume formatter (VFMT) 226. The volume formatter (VFMT) 226 extracts the management information from the title sets 84, 86, produces a video manager 71, and creates the logic data to be recorded on the disk 10 in the arrangement of FIG. 4. A disk formatter (DFMT) 228 adds error correction data to the logic data created at the volume formatter (VFMT) 226, thereby reconverting the logic data into

physical data to be recorded on the disk. A modulator 230 converts the physical data created at the disk formatter (DFMT) 228 into the recording data to be recorded actually on the disk. Then, a recorder 232 records the modulated recording data on the disk 10.

A standard flow for creating the aforementioned disk will be described with reference to FIGS. 49 and 50. FIG. 49 shows the flow for creating the logic data to be recorded on the disk 10. Specifically, as shown in step S280, parameter data items, including the number of video data files, their arrangement, and the size of each video data file, are set first. Next, in step S281 video manager 71 is generated from the parameters set and the video title set information 281 of each video title set 72. In step S282, the video manager 71 and the video title set 71 are arranged in the order mentioned, according to their logic block numbers, thereby generating logic data which is to be recorded on the disk 10.

Thereafter, the flow for creating the physical data to be recorded on the disk as shown in FIG. 50 is executed. Specifically, as shown in step S283, the logic data is divided into units of a specific number of bytes, thereby forming error correction data. Next, as shown in step S284, the logic data divided into units of a specific number of bytes are combined with the created error correction data to form physical sectors. Thereafter, as shown in step S285, physical data is created by combining physical sectors. In this way, the modulating process based on certain rules is performed on the physical data created in the flow of FIG. 50, thereby forming the recording data. Thereafter, the recording data is recorded on the disk 10.

The above-described data structure can be applied not only to a case where the data is recorded on recording mediums, such as optical disks, and then the disks are distributed to the users, but also to a communication system as shown in FIG. 51. Specifically, according to the procedure shown in FIGS. 45 to 48, an optical disk 10 in which a video manager 71 and video title set 72 as shown in FIG. 4 may be loaded into a reproducing unit 300, from whose system CPU section 50 the encoded data is taken out digitally and transmitted by a modulator/transmitter 310 to the users or the cable subscribers by radio or via a cable. Furthermore, the encoding system 320 shown in FIGS. 45 and 48 may create the data encoded on the provider side, such as a broadcasting station and the encoded data may be transmitted by the modulator/transmitter 310 to the users or the cable subscribers by radio or via a cable. In such a communication system, the information in the video manager 71 is modulated at the modulator/transmitter 310 and then supplied to or is directly supplied to the users free of charge. When a user is interested in the title, the modulator/transmitter 310 transmits the title set 72 at the user's or subscriber's request by radio or via a cable. Under the control of the video manager 71, the video title set information 94 is first transferred and then the title video object 95 in the video title set reproduced accord-

ing to the title set information 94 is transferred. At this time, if necessary, the video title set menu video object 95 is also transmitted. The transferred data is received by a receiver/demodulator 400 on the user side and is processed as encoded data at the system CPU section 50 of the reproducing unit on the user or subscriber side of FIG. 1 in the same manner as in the above-described reproducing process, whereby the video data is reproduced.

In transferring the video title set 72, the video object sets 95, 96 are transferred using the video object unit 85 of FIG. 6 as a unit. At the head of the video object unit 85, an NV pack 86 containing video playback and search information is arranged. Furthermore, because the NV pack contains the addresses of the video object units to be reproduced immediately before and after the video object unit 85 to which the NV pack 86 belongs, even if the video object unit 85 is lost during transfer for some reason, the video object can be reproduced reliably on the user side by requesting the lost video object unit 85 to be transmitted again. Furthermore, even if transfer is not carried out in the order of playback of video object units, because the system ROM/RAM section 52 on the user side holds the accurate playback information on program chains, the system CPU section 50 can specify the order of playback referring to the address data in its NV pack.

While in the above explanation, the video object unit is a data train containing video data, audio data, and sub-picture data, the video object unit may be composed of audio packs only or sub-picture packs only, because the video object unit has only to contain any one of video data, audio data, and sub-picture data.

As described above, the information used to control the playback and search of the data packets of the video and audio data determined and compressed in the MPEG system layer 2 is stored in a navigation pack. The navigation pack is placed at the head of a playback data packet train in a specific range of time and on the basis of the navigation pack, data transfer is performed, which assures reliable playback. Because the addresses of other navigation packs are put in the navigation pack, it is possible to achieve the change of angle, the skip of pictures, and special playback including fast-forward playback and fast-backward playback. Furthermore, because in the communication system, too, the data is transferred on the basis of the navigation pack, reliable data transfer is assured.

## Claims

### 1. A recording medium comprising:

- a plurality of data units (85,VOBU) containing playback data to be reproduced in a predetermined playback order;
- each data unit (82,VOBU) being composed of

at least one predetermined sequence of data packs;

each sequence of data packs comprising at least one of video packs, audio packs and sub-picture packs, wherein each of these packs is made up of a header portion and a packet of reproducible encoded video, audio or sub-picture data, whereby said video data being compressed and encoded in compliance with MPEG standards;

each sequence of data packs comprising a navigation data pack (86) arranged at the head of the sequence;

said navigation data pack (86) containing control information and being composed of a header portion (110,111), of a first data packet (116,PCI) and of a second data packet (117,DSI),

said first data packet (116,PCI) being composed of a packet header (112) and first control data (113), said first control data being presentation control information including start and end time (VOBU\_SPTS, VOBU\_EPTS) of the presentation of the reproducible data contained in the data packs of the respective sequence of data packs;

said second data packet (117,DSI) being composed of a packet header (114) and second control data (115), said second control data being search information including a list (VOBU\_SI) of start addresses (FWDANn,BWDANn) of a number of data units expressed as start addresses relative from the start address of the respective data unit to which the navigation data pack belongs forward and backward in the playback order and a flag (V\_FWD\_Exist1, V\_BWD\_Exist1) indicating whether or not the data unit designated by each start address contains video data.

2. The recording medium according to claim 1, wherein said navigation pack (86) contains address information indicating its own address.
3. The recording medium according to claim 1 or 2, wherein said navigation pack (86) contains the end address of the data unit to which the navigation pack itself belongs.
4. The recording medium according to claim 1, 2 or 3, wherein said navigation pack (86) contains an angle information (NSLS\_ANGLI,SML\_ANGLI) comprising a start address of another data unit related to a scene seen from a different angle which is to be reproduced alternatively upon command of a user.

5. The recording medium according to claim 4, wherein said angle information contains a plurality of start addresses of data units to be reproduced later than the data unit to which the navigation pack belongs.

6. The recording medium according to claim 4, wherein said angle information contains a plurality of start addresses of the data units to be reproduced earlier than the data unit to which the navigation pack belongs.

7. The recording medium according to one of the claims 1 to 6, wherein said navigation pack (86) of a data unit containing video data encoded in compliance with MPEG standards contains end address information indicating the address in the data unit in which the minimum data capable of forming an image of 1 picture is stored.

8. The recording medium according to one of the claims 1 to 7, wherein said navigation pack (86) of a data unit containing video data and at least one of audio data and sub-picture data contains synchronizing information on at least one of the audio data and sub-picture data to be reproduced in synchronization with the video data.

9. The recording medium according to one of the claims 1 to 8, wherein said list of start addresses of the search information of the second control data of the navigation pack contains the start addresses of the 15 data units to be reproduced immediately before and after the respective data unit to which said navigation pack belongs, and the start addresses of the 20th, 30th, 60th, 120th, and 240th data units to be reproduced before and after the respective data unit.

10. The recording medium according to one of the claims 1 to 9, wherein said search information has a specific description when a data unit to be searched for does not exist.

11. The recording medium according to one of the claims 1 to 10, wherein said search information contains a flag (V\_FWD\_Exist2,V\_BWD\_Exist2) indicating whether or not the data unit or data units between the respective data unit and a data unit designated by each start address in the list of start addresses of the search information contain(s) video data.

12. A method of reproducing playback data from a medium as defined in one of claims 1 to 11, comprising the steps of:

determining a fast-forward or fast rearward command input by a user;

- storing the search information of the second control data of the navigation data pack of a current data unit in a memory;  
 reverting to a start address (FWDANn, BWDANn) a number of addresses forward or backward from the address of the current data unit in the list (VOBU\_SI) of start addresses (FWDANn, BWDANn) of the search information of the second control data (115);  
 searching for and reading the data unit at this address from the disk;  
 decoding the reproducible video, audio or sub-picture data of the packs of the sequence of packs of that data unit and converting said data into a playback signal in accordance with the first control data (113) of the associated navigation data pack.
13. The method of reproducing playback data as defined in claim 12, wherein it is checked in the step of reverting to the start address a number of addresses forward or backward from the address of the current data unit whether the data unit at this reverted to start address contains video data by checking said flag (V\_FWD\_Exist1, V\_BWD\_Exist1) indicating whether or not the data unit designated by that start address contains video data, and
- wherein in case said flag (V\_FWD\_Exist1, V\_BWD\_Exist1) indicates that no video is contained in the data unit at this address, it is reverted to another start address in the list (VOBU\_SI) of start addresses (FWDANn, BWDANn) of the search information of the second control data (115) incremented or decremented a number of addresses forward or backward from the previously reverted to start address, and
- wherein these steps are repeated until a start address of a data unit containing video data is found in the list of start addresses of the search information of the second control data.
14. The method according to claim 12 or 13, wherein said navigation pack contains an angle information (NSLS\_ANGLI, SML\_AGLI) comprising a start address of another data unit related to a scene seen from a different angle which is to be reproduced alternatively upon command of a user, wherein at the time of angle change, the angle is switched by reproducing the other data unit by reference to the start address.
15. The method according to claim 14, wherein said angle information contains a plurality of start addresses of data units to be reproduced later than the data unit to which the navigation pack belongs, wherein
- the data units are reproduced with reference to the plurality of start addresses and the playback signal undergoes rewind playback.
16. The method according to claim 14, wherein said angle information contains a plurality of start addresses of the data units to be reproduced earlier than the data unit to which the navigation pack belongs, wherein the data units are reproduced with reference to the plurality of start addresses and the playback signal undergoes fast-forward playback.
17. The method according to one of claims 12 to 16, wherein said navigation pack, when said data unit contains the video data determined in the MPEG, contains end address information indicating the address in the data unit in which the minimum data capable of forming an image of 1 picture is stored, and wherein the minimum data to reproduce the 1 picture is acquired with reference to said address.
18. The method according to one of claims 12 to 17, wherein said navigation pack (86) of a data unit containing video data and at least one of audio data and sub-picture data contains synchronizing information on at least one of the audio data and sub-picture data to be reproduced in synchronization with the video data, and wherein at least either the audio data or the sub-picture data, together with the video data, is reproduced with reference to the synchronizing information.
19. An apparatus for reproducing playback data from a medium as defined in one of claims 1 to 11, comprising:
- means for determining a fast-forward or fast rearward command input by a user;  
 means for storing the search information of the second control data of the navigation data pack of a current data unit in a memory;  
 means for reverting to a start address a number of addresses forward or backward from the address of the current data unit in the list of start addresses of the search information of the second control data;  
 means for searching for and reading the data unit at this address from the disk;  
 means for decoding the reproducible video, audio or sub-picture data of the packs of the sequence of packs and for converting said data into a playback signal in accordance with the first control data of the associated navigation data pack.
20. An apparatus for reproducing playback data as defined in claim 19, wherein

said means for reverting to the start address a number of addresses forward or backward beyond the address of the current data unit is adapted to check whether the data unit at this reverted to start address contains video data by checking said flag (V\_FWD\_Exist1, V\_BWD\_Exist1) indicating whether or not the data unit designated by that start address contains video data, and wherein in case said flag (V\_FWD\_Exist1, V\_BWD\_Exist1) indicates that no video is contained in the data unit at this address, to revert to another start address in the list (VOBU\_SI) of start addresses (FWDANn, BWDANn) of the search information of the second control data (115) incremented or decremented a number of addresses forward or backward from the previously reverted to start address, and to repeat these steps until a start address of a data unit containing video data is found in the list of start addresses of the search information of the second control data.

21. The apparatus according to claim 19 or 20, wherein said navigation pack contains an angle information (NSLS\_ANGLI, SML\_AGLI) comprising a start address of another data unit related to a scene seen from a different angle which is to be reproduced alternatively upon command of a user, and wherein said apparatus is adapted to switch the angle, at the time of angle change, by reproducing the other data unit by reference to the start address.
22. The apparatus according to claim 21, wherein said angle information contains a plurality of start addresses of data units to be reproduced later than the data unit to which the navigation pack belongs, and wherein said apparatus is adapted to reproduce the data units with reference to the plurality of start addresses and the playback signal undergoes rewind playback.
23. The apparatus according to claim 21, wherein said angle information contains a plurality of start addresses of the data units to be reproduced earlier than the data unit to which the navigation pack belongs, and wherein said apparatus is adapted to reproduce the data units with reference to the plurality of start addresses and the playback signal undergoes fast-forward playback.
24. The apparatus according to one of claims 19 to 23, wherein said navigation pack, when said data unit contains the video data determined in the MPEG, contains end address information indicating the address in the data unit in which the minimum data capable of forming an image of I picture is stored, and wherein said apparatus is adapted to acquire

the minimum data to reproduce the I picture with reference to said address.

25. The apparatus according to one of claims 19 to 24, wherein said navigation pack (86) of a data unit containing video data and at least one of audio data and sub-picture data contains synchronizing information on at least one of the audio data and sub-picture data to be reproduced in synchronization with the video data, and wherein said apparatus is adapted to reproduce at least either the audio data or the sub-picture data, together with the video data, with reference to the synchronizing information.

26. A method of recording reproducible video, audio and sub-picture data on a recording medium, comprising the steps of:

obtaining video, audio and sub-picture data from respective sources;  
encoding said video, audio and sub-picture data into video packs, audio packs and sub-picture packs, wherein each of these packs is made up of a header portion and a packet of encoded reproducible video, audio or sub-picture data, whereby the video data is compressed and encoded in compliance with MPEG standards;  
combining the video packs, audio packs and sub-picture packs to a plurality of data units (85, VOBUs) containing data to be reproduced in a predetermined playback order, each data unit (82, VOBUs) being composed of at least one predetermined sequence of said data packs and each sequence of data packs comprising at least one of said video packs, audio packs and sub-picture packs;  
creating control information for each sequence of packs in the form of a navigation data pack composed of a header portion, of a first data packet (PCI) and of a second data packet (DSI),

said first data packet (PCI) being composed of a packet header and first control data, said first control data being presentation control information including start and end time of the presentation of the reproducible data contained in the data packs of the respective sequence of data packs;  
said second data packet (DSI) being composed of a packet header and second control data, said second control data being search information including a list (VOBU\_SI) of start addresses (FWDANn, BWDANn) of a number of data units expressed as start addresses relative from the start address of the respective data unit

to which the navigation data pack belongs forward and backward in the playback order and a flag (V\_FWD\_Exist1,V\_BWD\_Exist1) indicating whether or not the data unit designated by each start address contains video data;

arranging said navigation data pack at the head of the corresponding sequence of data packs of each data unit; and  
recording said data units on a data recording area of the recording medium.

27. The recording method according to claim 26, wherein said navigation pack (86) contains address information indicating its own address.
28. The recording method according to claim 26 or 27, wherein said navigation pack (86) contains the end address of the data unit to which the navigation pack itself belongs.
29. The recording method according to claim 26, 27 or 28, wherein said navigation pack (86) contains an angle information (NSLS ANGLI,SML AGLI) comprising a start address of another data unit related to a scene seen from a different angle which is to be reproduced alternatively upon command of a user.
30. The recording method according to claim 29, wherein said angle information contains a plurality of start addresses of data units to be reproduced later than the data unit to which the navigation pack belongs.
31. The recording method according to claim 29, wherein said angle information contains a plurality of start addresses of the data units to be reproduced earlier than the data unit to which the navigation pack belongs.
32. The recording method according to one of the claims 26 to 31, wherein said navigation pack (86) of a data unit containing video data encoded in compliance with MPEG standards contains end address information indicating the address in the data unit in which the minimum data capable of forming an image of I picture is stored.
33. The recording method according to one of the claims 26 to 32, wherein said navigation pack (86) of a data unit containing video data and at least one of audio data and sub-picture data contains synchronizing information on at least one of the audio data and sub-picture data to be reproduced in synchronization with the video data.

34. The recording method according to one of the claims 26 to 33, wherein said list of start addresses of the search information of the second control data of the navigation pack contains the start addresses of the 15 data units to be reproduced immediately before and after the respective data unit to which said navigation pack belongs, and the start addresses of the 20th, 30th, 60th, 120th, and 240th data units to be reproduced before and after the respective data unit.

35. The recording method according to one of the claims 26 to 34, wherein said search information has a specific description when a data unit to be searched for does not exist.

36. The recording method according to one of the claims 26 to 35, wherein said search information contains a flag (V\_FWD\_Exist2,V\_BWD\_Exist2) indicating whether or not the data unit or data units between the respective data unit and a data unit designated by each start address in the list of start addresses of the search information contain(s) video data.

37. An apparatus for recording reproducible video, audio and sub-picture data on a recording medium, comprising:

means for obtaining video, audio and sub-picture data from respective sources;

means for encoding said video, audio and sub-picture data into video packs, audio packs and sub-picture packs, wherein each of these packs is made up of a header portion and a packet of encoded reproducible video, audio or sub-picture data, whereby said video data is compressed and encoded in compliance with MPEG standards;

means for combining the video packs, audio packs and sub-picture packs to a plurality of data units (85,VOBU) containing data to be reproduced in a predetermined playback order, each data unit (82,VOBU) being composed of at least one predetermined sequence of said data packs and each sequence of data packs comprising at least one of said video packs, audio packs and sub-picture packs;

means for creating control information for each sequence of packs in the form of a navigation data pack composed of a header portion, of a first data packet (PCI) and of a second data packet (DSI),

said first data packet (PCI) being composed of a packet header and first control data, said first control data being presentation control information including start



and end time of the presentation of the reproducible data contained in the data packs of the respective sequence of data packs;

said second data packet (DSI) being composed of a packet header and second control data, said second control data being search information including a list (VOBU\_SI) of start addresses (FWDANn, BWDANn) of a number of data units expressed as start addresses relative from the start address of the respective data unit to which the navigation data pack belongs forward and backward in the playback order and a flag (V\_FWD\_Exist1, V\_BWD\_Exist1) indicating whether or not the data unit designated by each start address contains video data;

means for arranging said navigation data pack at the head of the corresponding sequence of data packs of each data unit; and  
means for recording said data units on a data recording area of the recording medium.

38. The recording apparatus according to claim 37, wherein said navigation pack (86) contains address information indicating its own address.

39. The recording apparatus according to claim 37 or 38, wherein said navigation pack (86) contains the end address of the data unit to which the navigation pack itself belongs.

40. The recording apparatus according to claim 37, 38 or 39, wherein said navigation pack (86) contains an angle information (NSLS\_ANGLI, SML\_AGLI) comprising a start address of another data unit related to a scene seen from a different angle which is to be reproduced alternatively upon command of a user.

41. The recording apparatus according to claim 40, wherein said angle information contains a plurality of start addresses of data units to be reproduced later than the data unit to which the navigation pack belongs.

42. The recording apparatus according to claim 40, wherein said angle information contains a plurality of start addresses of the data units to be reproduced earlier than the data unit to which the navigation pack belongs.

43. The recording apparatus according to one of the claims 37 to 42, wherein said navigation pack (86) of a data unit containing video data encoded in compliance with MPEG standards contains end address

information indicating the address in the data unit in which the minimum data capable of forming an image of 1 picture is stored.

44. The recording apparatus according to one of the claims 37 to 43, wherein said navigation pack (86) of a data unit containing video data and at least one of audio data and sub-picture data contains synchronizing information on at least one of the audio data and sub-picture data to be reproduced in synchronization with the video data.

45. The recording apparatus according to one of the claims 37 to 44, wherein said list of start addresses of the search information of the second control data of the navigation pack contains the start addresses of the 15 data units to be reproduced immediately before and after the respective data unit to which said navigation pack belongs, and the start addresses of the 20th, 30th, 60th, 120th, and 240th data units to be reproduced before and after the respective data unit.

46. The recording apparatus according to one of the claims 37 to 45, wherein said search information has a specific description when a data unit to be searched for does not exist.

47. The recording apparatus according to one of the claims 37 to 46, wherein said search information contains a flag (V\_FWD\_Exist2, V\_BWD\_Exist2) indicating whether or not the data unit or data units between the respective data unit and a data unit designated by each start address in the list of start addresses of the search information contain(s) video data.

48. A communication system comprising

an apparatus for reading data from a recording medium as defined in one of claims 1 to 11; or  
an encoding apparatus comprising:

means for obtaining video, audio and sub-picture data from respective sources;

means for encoding said video, audio and sub-picture data into video packs, audio packs and sub-picture packs, wherein each of these packs is made up of a header portion and a packet of encoded reproducible video, audio or sub-picture data, whereby the video data is compressed and encoded in compliance with MPEG standards;

means for combining the video packs, audio packs and sub-picture packs to a plurality of data units (85, VOBUs) containing data to be reproduced in a predetermined

playback order, each data unit (82,VOBU)  
 being composed of at least one predeter-  
 mined sequence of said data packs and  
 each sequence of data packs comprising  
 at least one of said video packs, audio 5  
 packs and sub-picture packs;  
 means for creating control information for  
 each sequence of packs in the form of a  
 navigation data pack composed of a head-  
 er portion, of a first data packet (PCI) and 10  
 of a second data packet (DSI),

said first data packet (PCI) being com-  
 posed of a packet header and first con- 15  
 trol data, said first control data being  
 presentation control information in-  
 cluding start and end time of the pres-  
 entation of the reproducible data con-  
 tained in the data packs of the respec- 20  
 tive sequence of data packs;  
 said second data packet (DSI) being  
 composed of a packet header and sec-  
 ond control data, said second control  
 data being search information includ- 25  
 ing a list (VOBU\_SI) of start addresses  
 (FWDANn,BWDANn) of a number of  
 data units expressed as start address-  
 es relative from the start address of the  
 respective data unit to which the navi- 30  
 gation data pack belongs forward and  
 backward in the playback order and a  
 flag (V\_FWD\_Exist1,V\_BWD\_Exist1)  
 indicating whether or not the data unit  
 designated by each start address con- 35  
 tains video data; and

means for arranging said navigation data  
 pack at the head of the corresponding se-  
 quence of data packs of each data unit;  
 means for modulating and for transmitting 40  
 the data units through the air or via a cable;  
 means for receiving and demodulating the  
 data units at a remote location; and

a decoding apparatus comprising: 45

means for determining a fast-forward or  
 fast rearward command input by a user;  
 means for storing the search information of  
 the second control data of the navigation 50  
 data pack of a current data unit in a mem-  
 ory;  
 means for reverting to a start address a  
 number of addresses forward or backward  
 from the address of the current data unit in  
 the list of start addresses of the search in- 55  
 formation of the second control data;  
 means for searching for and reading the

data unit at this address from the disk;  
 means for decoding the reproducible vid-  
 eo, audio or sub-picture data of the packs  
 of the sequence of packs and for convert-  
 ing said data into a playback signal in ac-  
 cordance with the first control data of the  
 associated navigation data pack.

49. The communication system as defined in claim 48,  
 wherein in said decoding apparatus

said means for reverting to the start address a  
 number of addresses forward or backward be-  
 yond the address of the current data unit is  
 adapted to check whether the data unit at this  
 reverted to start address contains video data  
 by checking said flag (V\_FWD\_Exist1,  
 V\_BWD\_Exist1) indicating whether or not the  
 data unit designated by that start address con-  
 tains video data, and  
 wherein in case said flag (V\_FWD\_Exist1,  
 V\_BWD\_Exist1) indicates that no video is con-  
 tained in the data unit at this address, to revert  
 to another start address in the list (VOBU\_SI)  
 of start addresses (FWDANn,BWDANn) of the  
 search information of the second control data  
 (115) incremented or decremented a number of  
 addresses forward or backward from the previ-  
 ously reverted to start address, and  
 to repeat these steps until a start address of a  
 data unit containing video data is found in the  
 list of start addresses of the search information  
 of the second control data.

50. The communication system according to claim 48  
 or 49, wherein said navigation pack (86) contains  
 address information indicating its own address.

51. The communication system according to claim 48,  
 49 or 50, wherein said navigation pack (86) contains  
 the end address of the data unit to which the navi-  
 gation pack itself belongs.

52. The communication system according to claim 48,  
 49, 50 or 51, wherein said navigation pack contains  
 an angle information (NSLS\_ANGLI,SML\_AGLI)  
 comprising a start address of another data unit re-  
 lated to a scene seen from a different angle which  
 is to be reproduced alternatively upon command of  
 a user, and wherein said reproducing apparatus is  
 adapted to switch the angle, at the time of angle  
 change, by reproducing the other data unit by ref-  
 erence to the start address.

53. The communication system according to claim 52,  
 wherein said angle information contains a plurality  
 of start addresses of data units to be reproduced  
 later than the data unit to which the navigation pack

belongs, and wherein said reproducing apparatus is adapted to reproduce the data units with reference to the plurality of start addresses and the playback signal undergoes rewind playback.

54. The communication system according to claim 52, wherein said angle information contains a plurality of start addresses of the data units to be reproduced earlier than the data unit to which the navigation pack belongs, and wherein said reproducing apparatus is adapted to reproduce the data units with reference to the plurality of start addresses and the playback signal undergoes fast-forward playback. 10
55. The communication system according to one of claims 48 to 54, wherein said navigation pack, when said data unit contains the video data determined in the MPEG, contains end address information indicating the address in the data unit in which the minimum data capable of forming an image of I picture is stored, and wherein said reproducing apparatus is adapted to acquire the minimum data to reproduce the I picture with reference to said address. 20
56. The communication system according to one of claims 48 to 55, wherein said navigation pack (86) of a data unit containing video data and at least one of audio data and sub-picture data contains synchronizing information on at least one of the audio data and sub-picture data to be reproduced in synchronization with the video data, and wherein said apparatus is adapted to reproduce at least either the audio data or the sub-picture data, together with the video data, with reference to the synchronizing information. 25 30 35
57. The communication system according to one of the claims 48 to 56, wherein said list of start addresses of the search information of the second control data of the navigation pack contains the start addresses of the 15 data units to be reproduced immediately before and after the respective data unit to which said navigation pack belongs, and the start addresses of the 20th, 30th, 60th, 120th, and 240th data units to be reproduced before and after the respective data unit. 40 45
58. The communication system according to one of the claims 48 to 57, wherein said search information has a specific description when a data unit to be searched for does not exist. 50
59. The communication system according to one of the claims 48 to 58, wherein said search information contains a flag (V\_FWD\_Exist2, V\_BWD\_Exist2) indicating whether or not the data unit or data units between the respective data unit and a data unit designated by each start address in the list of start 55

addresses of the search information contain(s) video data.

## 5 Patentansprüche

### 1. Aufzeichnungsträger, umfassend:

eine Anzahl von Dateneinheiten (85,VOBU), die in einer vorbestimmten Playback-Reihenfolge zu reproduzierende bzw. wiederzugebende Playback-Daten enthalten, wobei jede Dateneinheit (82,VOBU) mindestens eine vorbestimmte Datenpack-Sequenz umfaßt, wobei jede Datenpack-Sequenz mindestens eines von Videopacks, Audiopacks und Überlagerungsbildpacks umfaßt, wobei jedes dieser Packs aus einem Header-Abschnitt und einem Paket reproduzierbarer, codierter Video-, Audio- oder Überlagerungsbilddaten aufgebaut ist, wobei die Videodaten gemäß MPEG-Standards komprimiert und codiert sind, wobei jede Datenpack-Sequenz ein am Anfang der Sequenz angeordnetes Navigationsdatenpack (86) umfaßt, wobei das Navigationsdatenpack (86) Steuerinformation enthält und aus einem Header-Abschnitt (110,111), einem ersten Datenpaket (116,PCI) und einem zweiten Datenpaket (117,DSI) zusammengesetzt ist,

das erste Datenpaket (116,PCI) aus einem Paket-Header (112) und ersten Steuerdaten (113) zusammengesetzt ist, wobei die ersten Steuerdaten Präsentations-Steuerinformation sind bzw. darstellen, welche Start- und Endzeit (VOBU\_SPTS, VOBU\_EPTS) der Präsentation der in den Datenpacks der betreffenden Datenpack-Sequenz enthaltenen reproduzierbaren Daten enthält,

das zweite Datenpaket (117,DSI) aus einem Paket-Header (114) und zweiten Steuerdaten (115) zusammengesetzt ist, wobei die zweiten Steuerdaten Suchinformation sind bzw. darstellen, die eine Liste (VOBU\_SI) von Startadressen (FWDANn, BWDANn) einer Anzahl von Dateneinheiten enthält, die als Startadressen in Relation zur Startadresse der betreffenden Dateneinheit, zu der das Navigationsdatenpack gehört, nach vorwärts und rückwärts in der Playback-Reihenfolge ausgedrückt sind, sowie ein Flag (V\_FWD\_Exist1, V\_BWD\_Exist1), das angibt, ob die betreffende von einer Startadresse bezeichnete Dateneinheit Videodaten enthält oder

nicht.

2. Aufzeichnungsträger nach Anspruch 1, wobei das Navigations(daten)pack (86) Adressinformation enthält, welche seine eigene Adresse angibt. 5
3. Aufzeichnungsträger nach Anspruch 1 oder 2, wobei das Navigations(daten)pack (86) die Endadresse der Dateneinheit enthält, zu der das Navigations(daten)pack selbst gehört. 10
4. Aufzeichnungsträger nach Anspruch 1, 2 oder 3, wobei das Navigations(daten)pack (86) eine Winkelinformation (NSLS\_ANGLI, SML\_ANGLI) enthält, welche eine Startadresse einer anderen Dateneinheit aufweist, die sich auf eine aus einem anderen Winkel gesehene Szene bezieht, die alternativ auf Benutzerbefehl hin wiedergegeben werden soll. 15
5. Aufzeichnungsträger nach Anspruch 4, wobei die Winkelinformation eine Vielzahl von Startadressen von Dateneinheiten enthält, die später als die Dateneinheit, zu der das Navigations(daten)pack gehört, wiedergegeben werden sollen. 20
6. Aufzeichnungsträger nach Anspruch 4, wobei die Winkelinformation eine Vielzahl von Startadressen der Dateneinheiten enthält, die früher als die Dateneinheit, zu der das Navigations(daten)pack gehört, wiedergegeben werden sollen. 25
7. Aufzeichnungsträger nach einem der Ansprüche 1 bis 6, wobei das Navigations(daten)pack (86) einer gemäß MPEG-Standards codierte Videodaten enthaltenden Dateneinheit Endadressinformation enthält, welche die Adresse in der Dateneinheit angibt, an der die zur Bildung eines Einzelbildes (an image of I picture) fähigen Mindestdaten gespeichert sind. 30
8. Aufzeichnungsträger nach einem der Ansprüche 1 bis 7, wobei das Navigations(daten)pack (86) einer Videodaten sowie mindestens eines von Audiodaten und Überlagerungsbilddaten enthaltenden Dateneinheit Synchronisierungsinformation zu mindestens einem von Audiodaten und Überlagerungsbilddaten enthält, die synchron mit den Videodaten wiedergegeben sind. 35
9. Aufzeichnungsträger nach einem der Ansprüche 1 bis 8, wobei die Liste von Startadressen der Suchinformation der zweiten Steuerdaten des Navigations(daten)packs die Startadressen der 15 Dateneinheiten enthält, die unmittelbar vor bzw. nach der betreffenden Dateneinheit wiederzugegeben sind, zu der das Navigations(daten)pack gehört, sowie die Startadressen der 20ten, 30ten, 60ten, 120ten und 240ten Dateneinheiten, die vor bzw. nach der betreffenden Dateneinheit wiederzugegeben sind. 40

10. Aufzeichnungsträger nach einem der Ansprüche 1 bis 9, wobei die Suchinformation eine spezifische Beschreibung aufweist, wenn eine zu suchende Dateneinheit nicht vorhanden ist.

11. Aufzeichnungsträger nach einem der Ansprüche 1 bis 10, wobei die Suchinformation ein Flag (V\_FWD\_Exist2, V\_BWD\_Exist2) enthält, welches angibt, ob die Dateneinheit bzw. die Dateneinheiten zwischen der betreffenden Dateneinheit und einer jeweils von einer Startadresse in der Startadressenliste der Suchinformation bezeichneten Dateneinheit Videodaten enthält bzw. enthalten oder nicht.

12. Verfahren zum Reproduzieren bzw. Wiedergeben von Playback-Daten von einem Aufzeichnungsträger, wie er in den Ansprüchen 1 bis 11 definiert ist, mit den Schritten:

Bestimmen einer Schnell-Vorlauf- oder Schnell-Rücklauf-Befehlseingabe durch einen Benutzer,  
Speichern der Suchinformation der zweiten Steuerdaten des Navigationsdatenpacks einer aktuellen Dateneinheit in einem Speicher,  
Zugriff auf eine Startadresse (FWDANn, BWDANn) um eine Anzahl Adressen vor oder nach der Adresse der aktuellen Dateneinheit in der Liste (VOBU\_SI) von Startadressen (FWDANn, BWDANn) der Suchinformation der zweiten Steuerdaten (115),  
Suchen und Auslesen der Dateneinheit an dieser Adresse von der Platte,  
Decodieren der reproduzierbaren Video-, Audio- oder Überlagerungsbilddaten der Packs aus der Pack-Sequenz dieser Dateneinheit und Konvertieren der Daten in ein Playback-Signal gemäß den ersten Steuerdaten (113) des zugeordneten Navigationsdatenpacks.

13. Verfahren zum Reproduzieren- bzw. Wiedergeben nach Anspruch 12, wobei beim Schritt des Zugriffs auf die Startadresse um eine Anzahl Adressen vor oder nach der Adresse der aktuellen Dateneinheit nachgeprüft wird, ob die Dateneinheit an dieser Startadresse, auf die zugegriffen wurde, Videodaten enthält, indem das Flag (V\_FWD\_Exist1, V\_BWD\_Exist1), das angibt, ob die durch diese Startadresse bezeichnete Dateneinheit Videodaten enthält oder nicht, geprüft wird, und

wobei, wenn das Flag (V\_FWD\_Exist1, V\_BWD\_Exist1) angibt, daß keine Videodaten in der Dateneinheit an dieser Adresse vorhanden sind, auf eine andere Startadresse in der Liste (VOBU\_SI) der Startadressen (FWDANn, BWDANn) der Suchinformation der zweiten

Steuerdaten (115) zugegriffen wird, die um eine Anzahl Adressen vor oder nach der Startadresse liegt, auf die vorher zugegriffen wurde, und wobei diese Schritte wiederholt werden, bis eine Startadresse einer Videodaten enthaltenden Dateneinheit in der Startadressenliste der Suchinformation der zweiten Steuerdaten gefunden wird.

14. Verfahren nach Anspruch 12 oder 13, wobei das Navigations(daten)pack Winkelinformation (NSLS\_ANGLI, SML\_AGLI) enthält, welche eine Startadresse einer anderen Dateneinheit aufweist, die sich auf eine aus einem anderen Winkel gesehene Szene bezieht, die alternativ auf einen Benutzerbefehl hin wiedergegeben werden soll, wobei zum Zeitpunkt der Winkeländerung der Winkel durch Reproduzieren bzw. Wiedergeben der anderen Dateneinheit unter Bezug auf die (betreffende) Startadresse umgeschaltet wird. 10
15. Verfahren nach Anspruch 14, wobei die Winkelinformation eine Vielzahl von Startadressen von Dateneinheiten enthält, die später als die Dateneinheit wiederzugegeben sind, zu der das Navigations(daten)pack gehört, wobei die Dateneinheiten unter Bezugnahme auf die Vielzahl von Startadressen wiedergegeben werden und das Playback-Signal einem Rücklauf-Playback unterzogen wird. 15
16. Verfahren nach Anspruch 14, wobei die Winkelinformation eine Vielzahl von Startadressen von Dateneinheiten enthält, die früher als die Dateneinheit wiederzugegeben sind, zu der das Navigations(daten)pack gehört, wobei die Dateneinheiten unter Bezugnahme auf die Vielzahl von Startadressen wiedergegeben werden und das Playback-Signal einem Schnell-Vorlauf-Playback unterzogen wird. 20
17. Verfahren nach einem der Ansprüche 12 bis 16, wobei das Navigationspack, wenn die Dateneinheit die im MPEG festgelegten Videodaten enthält, eine Endadressinformation enthält, welche die Adresse in der Dateneinheit angibt, an der die zur Bildung eines Einzelbildes (I picture) fähigen Mindestdaten gespeichert sind, wobei die Mindestdaten zur Wiedergabe des Einzelbildes unter Bezugnahme auf die Adresse abgerufen werden. 25
18. Verfahren nach einem der Ansprüche 12 bis 17, wobei das Navigations(daten)pack (86) einer Videodaten sowie mindestens eines von Audiodaten und Überlagerungsbilddaten enthaltenden Dateneinheit Synchronisierungsinformation zu mindestens einem von Audiodaten und Überlagerungsbilddaten enthält, die synchron mit den Videodaten wiederzugegeben sind, und wobei mindestens entweder die Audiodaten oder die Überlagerungsbilddaten 30

zusammen mit den Videodaten unter Bezugnahme auf die Synchronisierungsinformation wiedergegeben werden.

19. Vorrichtung zum Reproduzieren bzw. Wiedergeben von Playback-Daten von einem Aufzeichnungsträger nach einem der Ansprüche 1 bis 11, umfassend: 35

eine Einrichtung zum Bestimmen einer Schnell-Vorlauf- oder Schnell-Rücklauf-Befehlseingabe durch einen Benutzer;  
eine Einrichtung zum Speichern der Suchinformation der zweiten Steuerdaten des Navigationsdatenpacks einer aktuellen Dateneinheit in einem Speicher,  
eine Einrichtung zum Zugriff auf eine Startadresse um eine Anzahl Adressen vor oder nach der Adresse der aktuellen Dateneinheit in der Startadressenliste der Suchinformation der zweiten Steuerdaten,  
eine Einrichtung zum Suchen und Auslesen der Dateneinheit an dieser Adresse von der Platte,  
eine Einrichtung zum Decodieren reproduzierbarer bzw. wiedergebbarer Video-, Audio- oder Überlagerungsbilddaten der Packs aus der Pack-Sequenz und zum Konvertieren der Daten in ein Playback-Signal gemäß den ersten Steuerdaten des zugeordneten Navigationsdatenpacks. 40

20. Vorrichtung zum Reproduzieren bzw. Wiedergeben von Playback-Daten nach Anspruch 19, wobei 45

die Einrichtung zum Zugriff auf eine Startadresse um eine Anzahl Adressen vor oder nach der Adresse der aktuellen Dateneinheit zu prüfen vermag, ob die Dateneinheit an der Startadresse, auf die zugegriffen wurde, Videodaten enthält, indem das Flag (V\_FWD\_Exist1, V\_BWD\_Exist1), das angibt, ob die durch diese Startadresse bezeichnete Dateneinheit Videodaten enthält oder nicht, geprüft wird, und wobei sie, 50

wenn das Flag (V\_FWD\_Exist1, V\_BWD\_Exist1) anzeigt, daß keine Videodaten in der Dateneinheit an dieser Adresse enthalten sind, auf eine andere Startadresse in der Liste (VOBU SI) von Startadressen (FWDANn, BWDANn) der Suchinformation der zweiten Steuerdaten (115) zugreift, die um eine Anzahl Adressen vor oder nach der Startadresse liegt, auf die vorher zugegriffen wurde, und sie diese Schritte zu wiederholen vermag, bis eine Startadresse einer Videodaten enthaltenden Dateneinheit in der Startadressenliste der Suchinformation der zweiten Steuerdaten gefunden wird. 55

21. Vorrichtung nach Anspruch 19 oder 20, wobei das Navigations (daten)pack Winkelinformation (NSLS\_ANGLI, SML\_AGLI) enthält, welche eine Startadresse einer anderen Dateneinheit aufweist, die sich auf eine aus einem anderen Winkel gesehene Szene bezieht, die alternativ auf einen Benutzerbefehl hin wiedergegeben werden soll, und die Vorrichtung zum Zeitpunkt der Winkeländerung der Winkel durch Reproduzieren bzw. Wiedergeben der anderen Dateneinheit unter Bezug auf die (betroffene) Startadresse den Winkel umzuschalten vermag. 5
22. Vorrichtung nach Anspruch 21, wobei die Winkelinformation eine Vielzahl von Startadressen von Dateneinheiten enthält, die später als die Dateneinheit wiederzugeben sind, zu der das Navigations(daten)pack gehört, wobei die Vorrichtung die Dateneinheiten unter Bezugnahme auf die Vielzahl von Startadressen wiedergeben vermag, und das Playback-Signal einem Rücklauf-Playback unterzogen wird. 10
23. Vorrichtung nach Anspruch 21, wobei die Winkelinformation eine Vielzahl von Startadressen von Dateneinheiten enthält, die früher als die Dateneinheit wiederzugeben sind, zu der das Navigations(daten)pack gehört, wobei die Vorrichtung die Dateneinheiten unter Bezugnahme auf die Vielzahl von Startadressen wiedergeben vermag, und das Playback-Signal einem Schnell-Vorlauf-Playback unterzogen wird. 15
24. Vorrichtung nach einem der Ansprüche 19 bis 23, wobei das Navigationspack, wenn die Dateneinheit die im MPEG festgelegten Videodaten enthält, eine Endadressinformation enthält, welche die Adresse in der Dateneinheit angibt, an der die zur Bildung eines Einzelbildes (I picture) fähigen Mindestdaten gespeichert sind, und (wobei) die Vorrichtung die Mindestdaten zur Wiedergabe des Einzelbildes (I picture) unter Bezugnahme auf die Adresse abzurufen vermag. 20
25. Vorrichtung nach einem der Ansprüche 19 bis 24, wobei das Navigationspack (86) einer Videodaten sowie mindestens eines von Audiodaten und Überlagerungsbilddaten enthaltenden Dateneinheit Synchronisierungsinformation zu mindestens einem der Audiodaten und Überlagerungsbilddaten enthält, die synchron mit den Videodaten wiedergegeben sind, und (wobei) die Vorrichtung mindestens entweder die Audiodaten oder die Überlagerungsbilddaten zusammen mit den Videodaten unter Bezugnahme auf die Synchronisierungsinformation wiedergeben vermag. 25
26. Verfahren zum Aufzeichnen reproduzierbarer bzw.

wiedergegebbarer Video-, Audio- und Überlagerungsbilddaten auf einem Aufzeichnungsträger, folgende Schritte umfassend:

Erhalt von Video-, Audio- und Überlagerungsbilddaten aus entsprechenden Quellen,  
Codieren der Video-, Audio- und Überlagerungsbilddaten in Videopacks, Audiopacks und Überlagerungsbildpacks, wobei jedes dieser Packs aus einem Header-Abschnitt und einem Paket reproduzierbarer, codierter Video-, Audio- oder Überlagerungsbilddaten aufgebaut ist, wobei die Videodaten gemäß MPEG-Standards komprimiert und codiert werden,  
Kombinieren der Videopacks, Audiopacks und Überlagerungsbildpacks zu einer Vielzahl von Dateneinheiten (85,VOBU), welche in einer vorbestimmten Playback-Reihenfolge wiedergegebende Daten enthalten, wobei jede Dateneinheit (82,VOBU) aus mindestens einer vorbestimmten Datenpacksequenz zusammengesetzt ist und jede Datenpacksequenz mindestens eines von Videopacks, Audiopacks und Überlagerungsbildpacks umfaßt,  
Erzeugen von Steuerinformation für jede Packsequenz in Form eines aus einem Header-Abschnitt, einem ersten Datenpaket (PCI) und einem zweiten Datenpaket (DSI) zusammengesetzten Navigationsdatenpacks, wobei

das erste Datenpaket (PCI) aus einem Paket-Header und ersten Steuerdaten zusammengesetzt ist, und die ersten Steuerdaten Präsentations-Steuerdaten sind bzw. darstellen, welche Start- und Endzeit der Präsentierung der in den Datenpacks der betreffenden Datenpacksequenz enthaltenen reproduzierbaren Daten enthält, das zweite Datenpaket (DSI) aus einem Paket-Header und zweiten Steuerdaten zusammengesetzt ist, wobei die zweiten Steuerdaten Suchinformation sind bzw. darstellen, die eine Liste (VOBU\_SI) von Startadressen (FWDANn,BWDANn) einer Anzahl von Dateneinheiten enthält, die als Startadressen in Relation zur Startadresse der betreffenden Dateneinheit, zu der das Navigationsdatenpack gehört, nach vorwärts und rückwärts in der Playback-Reihenfolge ausgedrückt sind, sowie ein Flag (V\_FWD\_Exist1,V\_BWD\_Exist1), das angibt, ob die betreffende, von einer Startadresse bezeichnete Dateneinheit Videodaten enthält oder nicht,

Anordnen des Navigationsdatenpacks am Anfang der entsprechenden Datenpacksequenz jeder Dateneinheit, und

Aufzeichnen der Dateneinheiten in einem Datenaufzeichnungsbereich des Aufzeichnungsträgers.

27. Aufzeichnungsverfahren nach Anspruch 26, wobei das Navigations(daten)pack (86) Adressinformation enthält, welche seine eigene Adresse angibt. 5
28. Aufzeichnungsverfahren nach Anspruch 26 oder 27, wobei das Navigations(daten)pack (86) die Endadresse der Dateneinheit enthält, zu der das Navigations(daten)pack selbst gehört. 10
29. Aufzeichnungsverfahren nach Anspruch 26, 27 oder 28, wobei das Navigations(daten)pack (86) Winkelinformation (NSLS\_ANGLI, SML\_AGLI) enthält, welche eine Startadresse einer anderen Dateneinheit aufweist, die sich auf eine aus einem anderen Winkel gesehene Szene bezieht, die alternativ auf Benutzerbefehl hin wiedergegeben werden soll. 15 20
30. Aufzeichnungsverfahren nach Anspruch 29, wobei die Winkelinformation eine Vielzahl von Startadressen von Dateneinheiten enthält, die später als die Dateneinheit, zu der das Navigations(daten)pack gehört, wiedergegeben werden sollen. 25
31. Aufzeichnungsverfahren nach Anspruch 29, wobei die Winkelinformation eine Vielzahl von Startadressen der Dateneinheiten enthält, die früher als die Dateneinheit, zu der das Navigations(daten)pack gehört, wiedergegeben werden sollen. 30
32. Aufzeichnungsverfahren nach einem der Ansprüche 26 bis 31, wobei das Navigations(daten)pack (86) einer gemäß MPEG-Standards codierte Videodaten enthaltenden Dateneinheit Endadressinformation enthält, welche die Adresse in der Dateneinheit angibt, an der die zur Bildung eines Einzelbildes (an image of 1 picture) fähigen Mindestdaten gespeichert sind. 35 40
33. Aufzeichnungsverfahren nach einem der Ansprüche 26 bis 32, wobei das Navigations(daten)pack (86) einer Videodaten sowie mindestens eines von Audiodaten und Überlagerungsbilddaten enthaltenden Dateneinheit Synchronisierungsinformation zu mindestens einem von Audiodaten und Überlagerungsbilddaten enthält, die synchron mit den Videodaten wiedergegeben sind. 45 50
34. Aufzeichnungsverfahren nach einem der Ansprüche 26 bis 33, wobei die Liste von Startadressen der Suchinformation der zweiten Steuerdaten des Navigations(daten)packs die Startadressen der 15 Dateneinheiten enthält, die unmittelbar vor bzw. nach der betreffenden Dateneinheit wiedergegeben 55

sind, zu der das Navigations(daten)pack gehört, sowie die Startadressen der 20ten, 30ten, 60ten, 120ten und 240ten Dateneinheiten, die vor bzw. nach der betreffenden Dateneinheit wiedergegeben sind.

35. Aufzeichnungsverfahren nach einem der Ansprüche 26 bis 34, wobei die Suchinformation eine spezifische Beschreibung aufweist, wenn eine zu suchende Dateneinheit nicht vorhanden ist.
36. Aufzeichnungsverfahren nach einem der Ansprüche 26 bis 35, wobei die Suchinformation ein Flag (V\_FWD\_Exist2, V\_BWD\_Exist2) enthält, welches angibt, ob die Dateneinheit bzw. die Dateneinheiten zwischen der betreffenden Dateneinheit und einer jeweils von einer Startadresse in der Startadressenliste der Suchinformation bezeichneten Dateneinheit Videodaten enthält bzw. enthalten oder nicht.
37. Vorrichtung zum Aufzeichnen reproduzierbarer bzw. wiedergebar Video-, Audio- und Überlagerungsbilddaten auf einem Aufzeichnungsträger, umfassend:

eine Einrichtung zum Erhalt von Video-, Audio- und Überlagerungsbilddaten aus entsprechenden Quellen,

eine Einrichtung zum Codieren der Video-, Audio- und Überlagerungsbilddaten in Videopacks, Audiopacks und Überlagerungsbilddaten, wobei jedes dieser Packs aus einem Header-Abschnitt und einem Paket reproduzierbarer, codierter Video-, Audio- oder Überlagerungsbilddaten aufgebaut ist, wobei die Videodaten gemäß MPEG-Standards komprimiert und codiert werden,

eine Einrichtung zum Kombinieren der Videopacks, Audiopacks und Überlagerungsbilddaten zu einer Vielzahl von Dateneinheiten (85, VOBUs), welche in einer vorbestimmten Playback-Reihenfolge wiedergegebende Daten enthalten, wobei jede Dateneinheit (82, VOBUs) aus mindestens einer vorbestimmten Datenpacksequenz zusammengesetzt ist und jede Datenpacksequenz mindestens eines der Videopacks, Audiopacks oder Überlagerungsbilddaten umfaßt,

eine Einrichtung zum Erzeugen von Steuerinformation für jede Packsequenz in Form eines aus einem Header-Abschnitt, einem ersten Datenpaket (PCI) und einem zweiten Datenpaket (DSI) zusammengesetzten Navigationsdatenpacks, wobei

das erste Datenpaket (PCI) aus einem Paket-Header und ersten Steuerdaten zu-

sammengesetzt ist, und die ersten Steuerdaten Präsentations-Steuerdaten sind bzw. darstellen, welche Start- und Endzeit der Präsentation der in den Datenpacks der betreffenden Datenpacksequenz enthaltenen reproduzierbaren Daten enthält, das zweite Datenpaket (DSI) aus einem Paket-Header und zweiten Steuerdaten zusammengesetzt ist, wobei die zweiten Steuerdaten Suchinformation sind bzw. darstellen, die eine Liste (VOBU\_SI) von Startadressen (FWDANn, BWDANn) einer Anzahl von Dateneinheiten enthält, die als Startadressen in Relation zur Startadresse der betreffenden Dateneinheit, zu der das Navigationsdatenpack gehört, nach vorwärts und rückwärts in der Playback-Reihenfolge ausgedrückt sind, sowie ein Flag (V\_FWD\_Exist1, BWD\_Exist1), das angibt, ob die betreffende, von einer Startadresse bezeichnete Dateneinheit Videodaten enthält oder nicht,

eine Einrichtung zum Anordnen des Navigationsdatenpacks am Anfang der entsprechenden Datenpacksequenz jeder Dateneinheit, und

eine Einrichtung zum Aufzeichnen der Dateneinheiten in einem Datenaufzeichnungsreich des Aufzeichnungsträgers.

38. Aufzeichnungsvorrichtung nach Anspruch 37, wobei das Navigations(daten)pack (86) Adressinformation enthält, welche seine eigene Adresse angibt.

39. Aufzeichnungsvorrichtung nach Anspruch 37 oder 38, wobei das Navigations(daten)pack (86) die Endadresse der Dateneinheit enthält, zu der das Navigations(daten)pack selbst gehört.

40. Aufzeichnungsvorrichtung nach Anspruch 37, 38 oder 39, wobei das Navigations(daten)pack (86) Winkelinformation (NSLS\_ANGLI, SML\_AGLI) enthält, welche eine Startadresse einer anderen Dateneinheit aufweist, die sich auf eine aus einem anderen Winkel gesehene Szene bezieht, die alternativ auf Benutzerbefehl hin wiedergegeben werden soll.

41. Aufzeichnungsvorrichtung nach Anspruch 40, wobei die Winkelinformation eine Vielzahl von Startadressen von Dateneinheiten enthält, die später als die Dateneinheit, zu der das Navigations(daten)pack gehört, wiedergegeben werden sollen.

42. Aufzeichnungsvorrichtung nach Anspruch 40, wobei die Winkelinformation eine Vielzahl von Start-

adressen der Dateneinheiten enthält, die früher als die Dateneinheit, zu der das Navigations(daten)pack gehört, wiedergegeben werden sollen.

5 43. Aufzeichnungsvorrichtung nach einem der Ansprüche 37 bis 42, wobei das Navigations(daten)pack (86) einer gemäß MPEG-Standards codierte Videodaten enthaltenden Dateneinheit Endadressinformation enthält, welche die Adresse in der Dateneinheit angibt, an der die zur Bildung eines Einzelbildes (an image of 1 picture) fähigen Mindestdaten gespeichert sind.

10 44. Aufzeichnungsvorrichtung nach einem der Ansprüche 37 bis 43, wobei das Navigations(daten)pack (86) einer Videodaten sowie mindestens eines von Audiodaten und Überlagerungsbilddaten enthaltenden Dateneinheit Synchronisierungsinformation zu mindestens einem von Audiodaten und Überlagerungsbilddaten enthält, die synchron mit den Videodaten wiedergegeben sind.

15 45. Aufzeichnungsvorrichtung nach einem der Ansprüche 37 bis 44, wobei die Liste von Startadressen der Suchinformation der zweiten Steuerdaten des Navigations(daten)packs die Startadressen der 15 Dateneinheiten enthält, die unmittelbar vor bzw. nach der betreffenden Dateneinheit wiedergegeben sind, zu der das Navigations(daten)pack gehört, sowie die Startadressen der 20ten, 30ten, 60ten, 120ten und 240ten Dateneinheiten, die vor bzw. nach der betreffenden Dateneinheit wiedergegeben sind.

20 46. Aufzeichnungsvorrichtung nach einem der Ansprüche 37 bis 45, wobei die Suchinformation eine spezifische Beschreibung aufweist, wenn eine zu suchende Dateneinheit nicht vorhanden ist.

25 47. Aufzeichnungsvorrichtung nach einem der Ansprüche 37 bis 46, wobei die Suchinformation ein Flag (V\_FWD\_Exist2, V\_BWD\_Exist2) enthält, welches angibt, ob die Dateneinheit bzw. die Dateneinheiten zwischen der betreffenden Dateneinheit und einer jeweils von einer Startadresse in der Startadressenliste der Suchinformation bezeichneten Dateneinheit Videodaten enthält bzw. enthalten oder nicht.

30 48. Kommunikationssystem, umfassend:

eine Vorrichtung zum Auslesen von Daten von einem Aufzeichnungsträger, wie er in einem der Ansprüche 1 bis 11 definiert ist, oder eine Codiervorrichtung, umfassend:

eine Einrichtung zum Erhalt von Video-, Audio- und Überlagerungsbilddaten aus



entsprechenden Quellen,  
 eine Einrichtung zum Codieren der Video-,  
 Audio- und Überlagerungsbilddaten in Vi-  
 deopacks, Audiopacks und Überlage-  
 rungsbildpacks, wobei jedes dieser Packs 5  
 aus einem Header-Abschnitt und einem  
 Paket reproduzierbarer, codierter Video-,  
 Audio- oder Überlagerungsbilddaten zu-  
 sammengesetzt ist, wobei die Videodaten  
 gemäß MPEG-Standards komprimiert und 10  
 codiert werden,  
 eine Einrichtung zum Kombinieren der Vi-  
 deopacks, Audiopacks und Überlage-  
 rungsbildpacks zu einer Vielzahl von Da-  
 teneinheiten (85,VOBU), welche in einer 15  
 vorbestimmten Playback-Reihenfolge wie-  
 derzugebende Daten enthalten, wobei je-  
 de Dateneinheit (82,VOBU) aus minde-  
 stens einer vorbestimmten Datenpackse-  
 quenz zusammengesetzt ist und jede Da- 20  
 tenpacksequenz mindestens eines von Vi-  
 deopacks, Audiopacks und Überlage-  
 rungsbildpacks umfaßt,  
 eine Einrichtung zum Erzeugen von Steu-  
 erinformation für jede Packsequenz in 25  
 Form eines aus einem Header-Abschnitt,  
 einem ersten Datenpaket (PCI) und einem  
 zweiten Datenpaket (DSI) zusammenge-  
 setzten Navigationsdatenpacks, wobei

das erste Datenpaket (PCI) aus einem  
 Paket-Header und ersten Steuerdaten  
 zusammengesetzt ist, und die ersten  
 Steuerdaten Präsentations-Steuerda- 30  
 ten sind bzw. darstellen, welche Start-  
 und Endzeit der Präsentation der in  
 den Datenpacks der betreffenden Da-  
 tenpacksequenz enthaltenen reprodu-  
 zierbaren Daten enthält,  
 das zweite Datenpaket (DSI) aus ei- 40  
 nem Paket-Header und zweiten Steu-  
 erdaten zusammengesetzt ist, wobei  
 die zweiten Steuerdaten Suchinforma-  
 tion sind bzw. darstellen, die eine Liste  
 (VOBU SI) von Startadressen 45  
 (FWDANn,BWDANn) einer Anzahl  
 von Dateneinheiten enthält, die als  
 Startadressen in Relation zur Start-  
 adresse der betreffenden Datenein- 50  
 heit, zu der das Navigationsdatenpack  
 gehört, nach vorwärts und rückwärts in  
 der Playback-Reihenfolge ausge-  
 drückt sind, sowie ein Flag  
 (V\_FWD\_Exist1,V\_BWD\_Exist1), das 55  
 angibt, ob die betreffende, von einer  
 Startadresse bezeichnete Datenein-  
 heit Videodaten enthält, und

eine Einrichtung zum Anordnen des Navi-  
 gationsdatenpacks am Anfang der ent-  
 sprechenden Datenpacksequenz jeder  
 Dateneinheit,

eine Einrichtung zum Modulieren und zum  
 Übertragen der Dateneinheiten über Funk  
 oder über ein Kabel,

eine Einrichtung zum Empfangen und De-  
 modulieren der Dateneinheiten an einem  
 entfernten Standort, sowie

eine Decodiervorrichtung, umfassend:

eine Einrichtung zum Bestimmen einer  
 Schnell-Vorlauf- oder Schnell-Rücklauf-  
 Befehlseingabe durch einen Benutzer;  
 eine Einrichtung zum Speichern der Su-  
 chinformation der zweiten Steuerdaten  
 des Navigationsdatenpacks einer aktuel-  
 len Dateneinheit in einem Speicher,  
 eine Einrichtung zum Zugriff auf eine Start-  
 adresse um eine Anzahl Adressen vor oder  
 nach der Adresse der aktuellen Datenein-  
 heit in der Startadressenliste der Suchin-  
 formation der zweiten Steuerdaten,  
 eine Einrichtung zum Suchen und Ausle-  
 sen der Dateneinheit an dieser Adresse  
 von der Platte,  
 eine Einrichtung zum Decodieren reprodu-  
 zierbarer bzw. wiedergegebbarer Video-, Au-  
 dio- oder Überlagerungsbilddaten der  
 Packs aus der Pack-Sequenz und zum  
 Konvertieren der Daten in ein Playback-Si-  
 gnal gemäß den ersten Steuerdaten des  
 zugeordneten Navigationsdatenpacks.

#### 49. Kommunikationssystem nach Anspruch 48, wobei in der Decodiervorrichtung

die Einrichtung zum Zugriff auf die Startadres-  
 se um eine Anzahl Adressen vor oder nach der  
 Adresse der aktuellen Dateneinheit zu prüfen  
 vermag, ob die Dateneinheit an der Startadres-  
 se, auf die zugegriffen wurde, Videodaten ent-  
 hält, indem das Flag (V\_FWD\_Exist1,  
 V\_BWD\_Exist1), das angibt, ob die durch diese  
 Startadresse bezeichnete Dateneinheit Video-  
 daten enthält oder nicht, geprüft wird, und wo-  
 bei sie,

wenn das Flag (V\_FWD\_Exist1,V\_BWD\_  
 Exist1) anzeigt, daß keine Videodaten in der  
 Dateneinheit an dieser Adresse enthalten sind,  
 auf eine andere Startadresse in der Liste  
 (VOBU SI) von Startadressen (FWDANn,  
 BWDANn) der Suchinformation der zweiten  
 Steuerdaten (115) zugreift, die um eine Anzahl  
 Adressen vor oder nach der Startadresse liegt,  
 auf die vorher zugegriffen wurde, und sie

diese Schritte zu wiederholen vermag, bis eine Startadresse einer Videodaten enthaltenden Dateneinheit in der Startadressenliste der Suchinformation der zweiten Steuerdaten gefunden wird.

50. Kommunikationssystem nach Anspruch 48 oder 49, wobei das Navigations(daten)pack (86) Adressinformation enthält, welche seine eigene Adresse angibt.

51. Kommunikationssystem nach Anspruch 48, 49 oder 50, wobei das Navigations(daten)pack (86) die Endadresse der Dateneinheit enthält, zu der das Navigations(daten)pack selbst gehört.

52. Kommunikationssystem nach Anspruch 48, 49, 50 oder 51, wobei das Navigations(daten)pack eine Winkelinformation (NSLS\_ANGLI, SML\_AGLI) enthält, welche eine Startadresse einer anderen Dateneinheit aufweist, die sich auf eine aus einem anderen Winkel gesehene Szene bezieht, die alternativ auf Benutzerbefehl hin wiedergegeben werden soll, und wobei die Wiedergabevorrichtung zum Zeitpunkt der Winkeländerung den Winkel durch Reproduzieren bzw. Wiedergeben der anderen Dateneinheit unter Bezug auf die (betroffene) Startadresse umzuschalten vermag.

53. Kommunikationssystem nach Anspruch 52, wobei die Winkelinformation eine Vielzahl von Startadressen von Dateneinheiten enthält, die später als die Dateneinheit, zu der das Navigations(daten)pack gehört, wiedergegeben werden sollen, und wobei die Wiedergabevorrichtung die Dateneinheiten unter Bezugnahme auf die Vielzahl von Startadressen wiedergeben vermag und das Playback-Signal einem Rücklauf-Playback unterzogen wird.

54. Kommunikationssystem nach Anspruch 52, wobei die Winkelinformation eine Vielzahl von Startadressen der Dateneinheiten enthält, die früher als die Dateneinheit, zu der das Navigations(daten)pack gehört, wiedergegeben werden sollen, und wobei die Wiedergabevorrichtung die Dateneinheiten unter Bezugnahme auf die Vielzahl von Startadressen wiedergeben vermag und das Playback-Signal einem Schnell-Vorlauf-Playback unterzogen wird.

55. Kommunikationssystem nach einem der Ansprüche 48 bis 54, wobei das Navigations(daten)pack (86), wenn die Dateneinheit die in MPEG-(Standards) festgelegten Videodaten enthält, Endadressinformation enthält, welche die Adresse in der Dateneinheit angibt, an der die zur Bildung eines Einzelbildes (an image of I picture) fähigen Mindestdaten gespeichert sind, und wobei die Wiedergabevorrichtung die Mindestdaten abzurufen vermag,

um das Einzelbild unter Bezug auf die (betroffene) Adresse wiederzugeben.

56. Kommunikationssystem nach einem der Ansprüche 48 bis 55, wobei das Navigations(daten)pack (86) einer Videodaten sowie mindestens eines von Audiodaten oder Überlagerungsbilddaten enthaltenden Dateneinheit Synchronisierungsinformation zu mindestens einem der Audiodaten und Überlagerungsbilddaten enthält, die synchron mit den Videodaten wiedergegeben sind, und wobei die (Wiedergabe)vorrichtung mindestens entweder die Audiodaten oder die Überlagerungsbilddaten zusammen mit den Videodaten unter Bezugnahme auf die Synchronisierungsinformation wiedergeben vermag.

57. Kommunikationssystem nach einem der Ansprüche 48 bis 56, wobei die Liste von Startadressen der Suchinformation der zweiten Steuerdaten des Navigations(daten)packs die Startadressen der 15 Dateneinheiten enthält, die unmittelbar vor bzw. nach der betreffenden Dateneinheit wiedergegeben sind, zu der das Navigations(daten)pack gehört, sowie die Startadressen der 20ten, 30ten, 60ten, 120ten und 240ten Dateneinheiten, die vor bzw. nach der betreffenden Dateneinheit wiedergegeben sind.

58. Kommunikationssystem nach einem der Ansprüche 48 bis 57, wobei die Suchinformation eine spezifische Beschreibung aufweist, wenn eine zu suchende Dateneinheit nicht vorhanden ist.

59. Kommunikationssystem nach einem der Ansprüche 48 bis 58, wobei die Suchinformation ein Flag (V\_FWD\_Exist2, V\_BWD\_Exist2) enthält, welches angibt, ob die Dateneinheit bzw. die Dateneinheiten zwischen der betreffenden Dateneinheit und einer jeweils von einer Startadresse in der Startadressenliste der Suchinformation bezeichneten Dateneinheit Videodaten enthält bzw. enthalten oder nicht.

## Revendications

1. Un support d'enregistrement comprenant :

un ensemble d'unités de données (85, VOBUs) contenant des données de reproduction à reproduire dans un ordre de reproduction prédéterminé;  
chaque unité de données (82, VOBUs) étant constituée par au moins une séquence prédéterminée de groupes de données;  
chaque séquence de groupes de données comprenant l'un au moins de groupes vidéo, de

groupes audio et de groupes de sous-image, chacun des ces groupes étant constitué par une partie d'en-tête et par un paquet de données vidéo, audio ou de sous-image codées reproductibles, grâce à quoi les données vidéo sont compressées et codées conformément à des normes MPEG;

chaque séquence de groupes de données comprenant un groupe de données de navigation (86) qui est placé à la tête de la séquence; les groupes de données de navigation (86) contenant une information de commande et étant constitués par une partie d'en-tête (110, 111), par un premier paquet de données (116, PCI) et par un second paquet de données (117, DSI),

le premier paquet de données (116, PCI) étant constitué par un en-tête de paquet (112) et par des premières données de commande (113), ces premières données de commande étant une information de commande de présentation comprenant un instant de début et de fin (VOBU\_SPTS, VOBUEPTS) de la présentation des données reproductibles qui sont contenues dans les groupes de données de la séquence respective de groupes de données;

le second paquet de données (117, DSI) étant constitué par un en-tête de paquet (114) et par des secondes données de commande (115), ces secondes données de commande étant une information de recherche comprenant une liste (VOBU\_SI) d'adresses de début (FWDANn, BWDANn) d'un certain nombre d'unités de données, exprimées sous la forme d'adresses de début relatives à partir de l'adresse de début de l'unité de données respective à laquelle appartient le groupe de données de navigation, en avant et en arrière dans l'ordre de reproduction, et un drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indiquant si l'unité de données qui est désignée par chaque adresse de début contient ou non des données vidéo.

2. Le support d'enregistrement selon la revendication 1, dans lequel le groupe de navigation (86) contient une information d'adresse indiquant sa propre adresse.
3. Le support d'enregistrement selon la revendication 1 ou 2, dans lequel le groupe de navigation (86) contient l'adresse de fin de l'unité de données à laquelle le groupe de navigation lui-même appartient.

4. Le support d'enregistrement selon la revendication 1, 2 ou 3, dans lequel le groupe de navigation (86) contient une information d'angle (NSLS\_ANGLI, SML\_ANGLI) comprenant une adresse de début d'une autre unité de données qui est liée à une scène vue d'un angle différent, qui doit être reproduite à la place, sous l'effet d'un ordre d'un utilisateur.

5. Le support d'enregistrement selon la revendication 4, dans lequel l'information d'angle contient un ensemble d'adresses de début d'unités de données devant être reproduites plus tard que l'unité de données à laquelle le groupe de navigation appartient.

6. Le support d'enregistrement selon la revendication 4, dans lequel l'information d'angle contient un ensemble d'adresses de début des unités de données à reproduire plus tôt que l'unité de données à laquelle le groupe de navigation appartient.

7. Le support d'enregistrement selon l'une des revendications 1 à 6, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo codées conformément à des normes MPEG, contient une information d'adresse de fin indiquant l'adresse dans l'unité de données à laquelle sont enregistrées les données minimales capables de former une visualisation d'une image I.

8. Le support d'enregistrement selon l'une des revendications 1 à 7, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo et au moins un type de données parmi des données audio et des données de sous-image, contient une information de synchronisation relative à au moins un type de données parmi les données audio et les données de sous-image à reproduire en synchronisme avec les données vidéo.

9. Le support d'enregistrement selon l'une des revendications 1 à 8, dans lequel la liste d'adresses de début de l'information de recherche des secondes données de commande du groupe de navigation, contient les adresses de début de 15 unités de données à reproduire immédiatement avant et après l'unité de données respective à laquelle le groupe de navigation appartient, et les adresses de début de 20-ième, 30-ième, 60-ième, 120-ième et 240-ième unités de données à reproduire avant et après l'unité de données respective.

10. Le support d'enregistrement selon l'une des revendications 1 à 9, dans lequel l'information de recherche a une description spécifique lorsqu'une unité de données à rechercher n'existe pas.

11. Le support d'enregistrement selon l'une des revendications 1 à 10, dans lequel l'information de recher-

che contient un drapeau (V\_FWD\_Exist2, V\_BWD\_Exist2) indiquant si l'unité de données ou les unités de données entre une unité de données respective et une unité de données désignée par chaque adresse de début dans la liste d'adresses de début de l'information de recherche, contiennent ou non des données vidéo.

12. Un procédé pour reproduire des données de reproduction à partir d'un support défini dans l'une des revendications 1 à 11, comprenant les étapes suivantes :

on détermine un ordre d'avance rapide ou de retour rapide introduit par un utilisateur;  
on enregistre dans une mémoire l'information de recherche des secondes données de commande du groupe de données de navigation d'une unité de données courante;  
on revient à une adresse de début (FWDANn, BWDANn) située un certain nombre d'adresses en avant ou en arrière à partir de l'adresse de l'unité de données courante dans la liste (VOBU\_SI) d'adresses de début (FWDANn, BWDANn) de l'information de recherche des secondes données de commande (115);  
on recherche et on lit sur le disque l'unité de données à cette adresse;  
on décode les données vidéo, audio ou de sous-image reproductibles des groupes de la séquence de groupes de cette unité de données, et on convertit ces données en un signal de reproduction, conformément aux premières données de commande (113) de données de navigation associé.

13. Le procédé pour reproduire des données de reproduction défini dans la revendication 12, dans lequel on contrôle à l'étape consistant à revenir à l'adresse de début située un certain nombre d'adresses en avant ou en arrière par rapport à l'adresse de l'unité de données courante, si l'unité de données à cette adresse de début à laquelle on est revenu, contient des données vidéo, en contrôlant le drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indiquant si l'unité de données qui est désignée par cette adresse de début contient ou non des données vidéo, et

dans lequel, dans le cas où le drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indique qu'aucune donnée vidéo n'est contenue dans l'unité de données à cette adresse, on revient à une autre adresse de début dans la liste (VOBU\_SI) d'adresses de début (FWDANn, BWDANn) de l'information de recherche des secondes données de commande (115), incrémentée ou décrémentée d'un certain nombre d'adresses en avant ou en arrière, à partir de

l'adresse de début à laquelle on est revenu précédemment, et dans lequel ces étapes sont répétées jusqu'à ce qu'une adresse de début d'une unité de données contenant des données vidéo soit trouvée dans la liste d'adresses de début de l'information de recherche des secondes données de commande.

14. Le procédé selon la revendication 12 ou 13, dans lequel le groupe de navigation contient une information d'angle (NSLS\_ANGLI, SML\_AGLI) comprenant une adresse de début d'une autre unité de données liée à une scène vue d'un angle différent, qui doit être reproduite à la place, sous l'effet d'un ordre d'un utilisateur, dans lequel au moment du changement d'angle, l'angle est commuté en reproduisant l'autre unité de données par référence à l'adresse de début.

15. Le procédé selon la revendication 14, dans lequel l'information d'angle contient un ensemble d'adresses de début d'unités de données à reproduire plus tard que l'unité de données à laquelle le groupe de navigation appartient, dans lequel les unités de données sont reproduites en se référant à l'ensemble d'adresses de début, et le signal de reproduction subit une reproduction en mode de rebobinage.

16. Le procédé selon la revendication 14, dans lequel l'information d'angle contient un ensemble d'adresses de début des unités de données à reproduire plus tôt que l'unité de données à laquelle le groupe de navigation appartient, dans lequel les unités de données sont reproduites en se référant à l'ensemble d'adresses de début, et le signal de reproduction subit une reproduction dans un mode d'avance rapide.

17. Le procédé selon l'une des revendications 12 à 16, dans lequel lorsque l'unité de données contient les données vidéo qui sont déterminées dans la norme MPEG, le groupe de navigation contient une information d'adresse de fin indiquant l'adresse dans l'unité de données dans laquelle sont enregistrées les données minimales capables de former une visualisation d'une image I, et dans lequel les données minimales pour reproduire l'image I sont acquises en se référant à cette adresse.

18. Le procédé selon l'une des revendications 12 à 17, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo et au moins un type de données parmi des données audio et des données de sous-image, contient une information de synchronisation concernant au moins un type de données parmi les données audio et les données de sous-image à reproduire en syn-

chronisme avec les données vidéo, et dans lequel au moins les données audio ou les données de sous-image, conjointement aux données vidéo, sont reproduites en se référant à l'information de synchronisation.

19. Un appareil pour reproduire des données de reproduction à partir d'un support défini dans l'une des revendications 1 à 11, comprenant :

des moyens pour déterminer un ordre d'avance rapide ou de retour rapide qui est introduit par un utilisateur;  
des moyens pour enregistrer dans une mémoire l'information de recherche des secondes données de commande du groupe de données de navigation d'une unité de données courante;  
des moyens pour revenir à une adresse de début située un certain nombre d'adresses en avant ou en arrière par rapport à l'adresse de l'unité de données courante, dans la liste d'adresses de début de l'information de recherche des secondes données de commande;  
des moyens pour rechercher et lire sur le disque l'unité de données à cette adresse;  
des moyens pour décoder les données vidéo, audio ou de sous-image reproductibles des groupes de la séquence de groupes, et pour convertir ces données en un signal de reproduction, conformément aux premières données de commande du groupe de données de navigation associé.

20. Un appareil pour reproduire des données de reproduction selon la revendication 19, dans lequel

les moyens pour revenir à l'adresse de début située un certain nombre d'adresses en avant ou en arrière au-delà de l'adresse de l'unité de données courante, sont adaptés pour contrôler si l'unité de données à cette adresse de début à laquelle on est revenu, contient des données vidéo, en contrôlant le drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indiquant si l'unité de données qui est désignée par cette adresse de début contient ou non des données vidéo, et

dans lequel dans le cas où le drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indique qu'aucune donnée vidéo n'est contenue dans l'unité de données à cette adresse, pour revenir à une autre adresse de début dans la liste (VOBU SI) d'adresses de début (FWDANn, BWDANn) de l'information de recherche de secondes données de commande (115), incrémentée ou décrétementée d'un certain nombre d'adresses en avant ou en arrière, à partir de l'adresse de début à laquelle ils sont revenus

précédemment, et

pour répéter ces étapes jusqu'à ce qu'une adresse de début d'une unité de données contenant des données vidéo soit trouvée dans la liste d'adresses de début de l'information de recherche de secondes données de commande.

21. L'appareil selon la revendication 19 ou 20, dans lequel le groupe de navigation contient une information d'angle (NSLS\_ANGLI, SML\_ANGLI) comprenant une adresse de début d'une autre unité de données liée à une scène vue d'un angle différent, qui doit être reproduite à la place, sous l'effet d'un ordre d'un utilisateur, et dans lequel l'appareil est adapté pour commuter l'angle, au moment du changement d'angle, en reproduisant l'autre unité de données en se référant à l'adresse de début.

22. L'appareil selon la revendication 21, dans lequel l'information d'angle contient un ensemble d'adresses de début d'unités de données à reproduire plus tard que l'unité de données à laquelle le groupe de navigation appartient, et dans lequel l'appareil est adapté pour reproduire les unités de données en se référant à l'ensemble d'adresses de début et le signal de reproduction subit une reproduction en mode de rebobinage.

23. L'appareil selon la revendication 21, dans lequel l'information d'angle contient un ensemble d'adresses de début des unités de données à reproduire plus tôt que l'unité de données à laquelle le groupe de navigation appartient, et dans lequel l'appareil est adapté pour reproduire les unités de données en se référant à l'ensemble d'adresses de début, et le signal de reproduction subit une reproduction en mode d'avance rapide.

24. L'appareil selon l'une des revendications 19 à 23, dans lequel lorsque l'unité de données contient les données vidéo qui sont déterminées dans la norme MPEG, le groupe de navigation contient une information d'adresse de fin indiquant l'adresse dans l'unité de données à laquelle sont enregistrées les données minimales capables de former une visualisation d'une image I, et dans lequel l'appareil est adapté pour acquérir les données minimales pour reproduire l'image I en se référant à l'adresse précitée.

25. L'appareil selon l'une des revendications 19 à 24, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo et au moins un type de données parmi des données audio et des données de sous-image, contient une information de synchronisation concernant au moins un type de données parmi les données audio et les données de sous-image à reproduire en syn-

chronisme avec les données vidéo, et dans lequel l'appareil est adapté pour reproduire au moins les données audio ou les données de sous-image, conjointement aux données vidéo, en se référant à l'information de synchronisation.

26. Un procédé pour enregistrer sur un support d'enregistrement des données vidéo, audio et de sous-image reproductibles, comprenant les étapes suivantes :

on obtient à partir de sources respectives des données vidéo, audio et de sous-image; on code les données vidéo, audio et de sous-image en groupes vidéo, groupes audio et groupes de sous-image, chacun de ces groupes étant constitué par une partie d'en-tête et par un paquet de données vidéo, audio ou de sous-image reproductibles codées, grâce à quoi les données vidéo sont compressées et codées conformément à des normes MPEG; on combine les groupes vidéo, les groupes audio et les groupes de sous-image en un ensemble d'unités de données (85, VOBUs) contenant des données à reproduire dans un ordre de reproduction prédéterminé, chaque unité de données (82, VOBUs) étant constituée par au moins une séquence prédéterminée des groupes de données, et chaque séquence de groupes de données comprenant l'un au moins des groupes vidéo, des groupes audio et des groupes de sous-image; on crée une information de commande pour chaque séquence de groupes, sous la forme d'un groupe de données de navigation constitué par une partie d'en-tête, par un premier paquet de données (PCI) et par un second paquet de données (DSI)

le premier paquet de données (PCI) étant constitué par un en-tête de paquet et des premières données de commande, ces premières données de commande étant une information de commande de présentation comprenant un instant de début et de fin de la présentation des données reproductibles qui sont contenues dans les groupes de données de la séquence respectives de groupes de données;

le second paquet de données (DSI) étant constitué par un en-tête de paquet et par des secondes données de commande, ces secondes données de commande étant une information de recherche qui comprend une liste (VOBU\_Si) d'adresses de début (FWDANn, BWDANn) d'un certain nombre d'unités de données, exprimées sous la forme d'adresses de début relatives

par rapport à l'adresse de début de l'unité de données respective à laquelle le groupe de données de navigation appartient, en avant et en arrière dans l'ordre de reproduction, et un drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indiquant si l'unité de données qui est désignée par chaque adresse de début contient ou non des données vidéo;

on dispose le groupe de données de navigation à la tête de la séquence correspondante de groupes de données de chaque unité de données; et on enregistre les unités de données sur une zone d'enregistrement de données du support d'enregistrement.

27. Le procédé d'enregistrement selon la revendication 26, dans lequel le groupe de navigation (86) contient une information d'adresse indiquant sa propre adresse.
28. Le procédé d'enregistrement selon la revendication 26 ou 27, dans lequel le groupe de navigation (86) contient l'adresse de fin de l'unité de données à laquelle le groupe de navigation lui-même appartient.
29. Le procédé d'enregistrement selon la revendication 26, 27 ou 28, dans lequel le groupe de navigation (86) contient une information d'angle (NSLS\_ANGLI, SML\_AGLI) comprenant une adresse de début d'une autre unité de données liée à une scène vue d'un angle différent, qui doit être reproduite à la place, sous l'effet d'un ordre d'un utilisateur.
30. Le procédé d'enregistrement selon la revendication 29, dans lequel l'information d'angle contient un ensemble d'adresses de début d'unités de données à reproduire plus tard que l'unité de données à laquelle le groupe de navigation appartient.
31. Le procédé d'enregistrement selon la revendication 29, dans lequel l'information d'angle contient un ensemble d'adresses de début des unités de données à reproduire plus tôt que l'unité de données à laquelle le groupe de navigation appartient.
32. Le procédé d'enregistrement selon l'une des revendications 26 à 31, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo codées conformément à des normes MPEG, contient une information d'adresse de fin indiquant l'adresse dans l'unité de données à laquelle sont enregistrées les données minimales capables de former une visualisation d'une image I.

33. Le procédé d'enregistrement selon l'une des revendications 26 à 32, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo et au moins un type de données parmi des données audio et des données de sous-image, 5  
contient une information de synchronisation sur au moins un type de données parmi les données audio et les données de sous-image à reproduire en synchronisme avec les données vidéo.

10

34. Le procédé d'enregistrement selon l'une des revendications 26 à 33, dans lequel la liste d'adresses de début de l'information de recherche des secondes données de commande du groupe de navigation 15  
contient les adresses de début de 15 unités de données à reproduire immédiatement avant et après l'unité de données respective à laquelle le groupe de navigation appartient, et les adresses de début de 20-ième, 30-ième, 60-ième, 120-ième et 240-ième 20  
unités de données à reproduire avant et après l'unité de données respective.

35. Le procédé d'enregistrement selon l'une des revendications 26 à 34, dans lequel l'information de recherche a une description spécifique lorsqu'une 25  
unité de données à rechercher n'existe pas.

36. Le support d'enregistrement selon l'une des revendications 26 à 35, dans lequel l'information de recherche contient un drapeau (V\_FWD\_Exist2, V\_BWD\_Exist2) indiquant si l'unité de données ou les unités de données entre l'unité de données respective et une unité de données qui est désignée 30  
par chaque adresse de début dans la liste d'adresses de début de l'information de recherche, contiennent des données vidéo.

35

37. Un appareil pour enregistrer sur un support d'enregistrement des données vidéo, audio et de sous-image reproductibles, comprenant : 40

des moyens pour obtenir des données vidéo, audio et de sous-image à partir de sources respectives;  
des moyens pour coder les données vidéo, 45  
audio et de sous-image en groupes vidéo, groupes audio et groupes de sous-image, chacun de ces groupes étant constitué par une partie d'en-tête et par un paquet de données vidéo, audio ou de sous-image reproductibles codées, grâce à quoi les données vidéo sont compressées et codées conformément à des normes MPEG;  
des moyens pour combiner les groupes vidéo, les groupes audio et les groupes de sous-image en un ensemble d'unités de données (85, VOB) contenant des données à reproduire dans un ordre de reproduction prédéterminé, 50

55

chaque unité de données (82, VOB) étant constituée par au moins une séquence prédéterminée des groupes de données, et chaque séquence de groupes de données comprenant l'un au moins des groupes vidéo, des groupes audio et des groupes de sous-image;  
des moyens pour créer une information de commande pour chaque séquence de groupes, sous la forme d'un groupe de données de navigation constitué par une partie d'en-tête, par un premier paquet de données (PCI) et par un second paquet de données (DSI),

le premier paquet de données (PCI) étant constitué par un en-tête de paquet et des premières données de commande, ces premières données de commande étant une information de commande de présentation comprenant un instant de début et de fin de la présentation des données reproductibles qui sont contenues dans les groupes de données de la séquence respectives de groupes de données;  
le second paquet de données (DSI) étant constitué par un en-tête de paquet et des secondes données de commande, ces secondes données de commande étant une information de recherche comprenant une liste (VOBU\_SI) d'adresses de début (FWDANn, BWDANn) d'un certain nombre d'unités de données, exprimées sous la forme d'adresses de début relatives à partir de l'adresse de début de l'unité de données respective à laquelle le groupe de données de navigation appartient, en avant et en arrière dans l'ordre de reproduction, et un drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indiquant si l'unité de données qui est désignée par chaque adresse de début contient des données vidéo ou non;

des moyens pour disposer le groupe de données de navigation à la tête de la séquence correspondante de groupes de données de chaque unité de données; et  
des moyens pour enregistrer les unités de données sur une zone d'enregistrement de données du support d'enregistrement.

50

38. L'appareil d'enregistrement selon la revendication 37, dans lequel le groupe de navigation (86) contient une information d'adresse indiquant sa propre adresse.

55

39. L'appareil d'enregistrement selon la revendication 37 ou 38, dans lequel le groupe de navigation (86) contient l'adresse de fin de l'unité de données à laquelle le groupe de navigation lui-même appartient.

40. L'appareil d'enregistrement selon la revendication 37, 38 ou 39, dans lequel le groupe de navigation (86) contient une information d'angle (NSLS\_ANGLI, SML\_AGLI) comprenant une adresse de début d'une autre unité de données liée à une scène vue d'un angle différent, qui doit être reproduite à la place, sous l'effet d'un ordre d'un utilisateur.
41. L'appareil d'enregistrement selon la revendication 40, dans lequel l'information d'angle contient un ensemble d'adresses de début d'unités de données à reproduire plus tard que l'unité de données à laquelle le groupe de navigation appartient.
42. L'appareil d'enregistrement selon la revendication 40, dans lequel l'information d'angle contient un ensemble d'adresses de début des unités de données à reproduire plus tôt que l'unité de données à laquelle le groupe de navigation appartient.
43. L'appareil d'enregistrement selon l'une des revendications 37 à 42, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo codées conformément à des normes MPEG, contient une information d'adresse de fin indiquant l'adresse dans l'unité de données à laquelle sont enregistrées les données minimales capables de former une visualisation d'une image I.
44. L'appareil d'enregistrement selon l'une des revendications 37 à 43, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo et au moins un type de données parmi des données audio et des données de sous-image, contient une information de synchronisation concernant au moins un type de données parmi les données audio et les données de sous-image à reproduire en synchronisme avec les données vidéo.
45. L'appareil d'enregistrement selon l'une des revendications 37 à 44, dans lequel la liste d'adresses de début de l'information de recherche des secondes données de commande du groupe de navigation contient les adresses de début de 15 unités de données à reproduire immédiatement avant et après l'unité de données respective à laquelle le groupe de navigation appartient, et les adresses de début des 20-ième, 30-ième, 60-ième, 120-ième et 240-ième unités de données à reproduire avant et après l'unité de données respective.
46. L'appareil d'enregistrement selon l'une des revendications 37 à 45, dans lequel l'information de recherche a une description spécifique lorsqu'une unité de données à rechercher n'existe pas.
47. L'appareil d'enregistrement selon l'une des revendications 37 à 46, dans lequel l'information de recherche contient un drapeau (V\_FWD\_Exist2, V\_BWD\_Exist2) indiquant si l'unité de données ou les unités de données entre l'unité de données respective et une unité de données qui est désignée par chaque adresse de début dans la liste d'adresses de début de l'information de recherche, contiennent des données vidéo ou non.
48. Un système de communication comprenant un appareil pour lire des données sur un support d'enregistrement; ment défini dans l'une des revendications 1 à II; ou un appareil de codage comprenant :
- des moyens pour obtenir des données vidéo, audio et de sous-image à partir de sources respectives;
- des moyens pour coder les données vidéo, audio et de sous-image en groupes vidéo, groupes audio et groupes de sous-image, dans lesquels chacun de ces groupes est constitué par une partie d'en-tête et par un paquet de données vidéo, audio ou de sous-image reproductibles codées, grâce à quoi les données vidéo sont compressées et codées conformément à des normes MPEG;
- des moyens pour combiner les groupes vidéo, les groupes audio et les groupes de sous-image en un ensemble d'unités de données (85, VOB) contenant des données à reproduire dans un ordre de reproduction prédéterminé, chaque unité de données (82, VOB) étant constituée par au moins une séquence prédéterminée des groupes de données, et chaque séquence de groupes de données comprenant l'un au moins des groupes vidéo, des groupes audio et des groupes de sous-image;
- des moyens pour créer une information de commande pour chaque séquence de groupes, sous la forme d'un groupe de données de navigation constitué par une partie d'en-tête, par un premier paquet de données (PCI) et par un second paquet de données (DSI),
- le premier paquet de données (PCI) étant constitué par un en-tête de paquet et par des premières données de commande, ces premières données de commande étant une information de commande de présentation comprenant un instant de début et de fin de la présentation des données repro-



ductibles qui sont contenues dans les groupes de données de la séquence respective de groupes de données; le second paquet de données (DSI) étant constitué par un en-tête de paquet et par des secondes données de commande, ces secondes données de commande étant une information de recherche qui comprend une liste (VOBU\_SI) d'adresses de début (FWDANn, BWDANn) d'un certain nombre d'unités de données, exprimées sous la forme d'adresses de début relatives, à partir de l'adresse de début de l'unité de données respective à laquelle le groupe de données de navigation appartient, en avant et en arrière dans l'ordre de reproduction, et un drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indiquant si l'unité de données qui est désignée par chaque adresse de début contient des données vidéo ou non; et

des moyens pour disposer le groupe de données de navigation à la tête de la séquence correspondante de groupes de données de chaque unité de données; des moyens pour moduler et pour transmettre les unités de données par voie hertzienne ou par l'intermédiaire d'un câble; des moyens pour recevoir et démoduler les unités de données à un emplacement éloigné; et

un appareil de décodage comprenant :

des moyens pour déterminer un ordre d'avance rapide ou de retour rapide qui est introduit par un utilisateur; des moyens pour enregistrer dans une mémoire l'information de recherche des secondes données de commande du groupe de données de navigation d'une unité de données courante; des moyens pour revenir à une adresse de début située un certain nombre d'adresses en avant ou en arrière par rapport à l'adresse de l'unité de données courante dans la liste d'adresses de début de l'information de recherche des secondes données de commande; des moyens pour rechercher et lire sur le disque l'unité de données à cette adresse; des moyens pour décoder les données vidéo, audio ou de sous-image reproductibles des groupes de la séquence de groupes, et pour convertir ces données en un

signal de reproduction, conformément aux premières données de commande du groupe de données de navigation associé.

- 5 49. Le système de communication défini dans la revendication 48, dans lequel, dans l'appareil de décodage

les moyens pour revenir à l'adresse de début située un certain nombre d'adresses en avant ou en arrière au-delà de l'adresse de l'unité de données courante, sont adaptés pour contrôler si l'unité de données à cette adresse de début à laquelle on est revenu, contient des données vidéo, en contrôlant le drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) qui indique si l'unité de données désignée par cette adresse de début contient des données vidéo ou non, et

20 dans lequel, dans le cas où le drapeau (V\_FWD\_Exist1, V\_BWD\_Exist1) indique que l'unité de données à cette adresse ne contient pas de vidéo, pour revenir à une autre adresse de début dans la liste (VOBU\_SI) d'adresses de début (FWDANn, BWDANn) de l'information de recherche des secondes données de commande (115), incrémentée ou décrémentée d'un certain nombre d'adresses en avant ou en arrière, à partir de l'adresse à laquelle on est revenu précédemment, et pour répéter ces étapes jusqu'à ce qu'une adresse de début d'une unité de données contenant des données vidéo soit trouvée dans la liste d'adresses de début de l'information de recherche des secondes données de commande.

- 40 50. Le système de communication selon la revendication 48 ou 49, dans lequel le groupe de navigation (86) contient une information d'adresse indiquant sa propre adresse.

- 45 51. Le système de communication selon la revendication 48, 49 ou 50, dans lequel le groupe de navigation (86) contient l'adresse de fin de l'unité de données à laquelle le groupe de navigation lui-même appartient.

- 50 52. Le système de communication selon la revendication 48, 49, 50 ou 51, dans lequel le groupe de navigation contient une information d'angle (NSLS\_ANGLI, SML\_ANGLI) comprenant une adresse de début d'une autre unité de données liée à une scène vue d'un angle différent, qui doit être reproduite à la place, sous l'effet d'un ordre d'un utilisateur, et dans lequel l'appareil de reproduction est adapté pour commuter l'angle, au moment du changement d'angle, en reproduisant l'autre unité de

données, par référence à l'adresse de début.

53. Le système de communication selon la revendication 52, dans lequel l'information d'angle contient un ensemble d'adresses de début d'unités de données à reproduire plus tard que l'unité de données à laquelle le groupe de navigation appartient, et dans lequel l'appareil de reproduction est adapté pour reproduire les unités de données en se référant à l'ensemble d'adresses de début, et le signal de reproduction subit une reproduction en mode de rebobinage.

54. Le système de communication selon la revendication 52, dans lequel l'information d'angle contient un ensemble d'adresses de début des unités de données à reproduire plus tôt que l'unité de données à laquelle le groupe de navigation appartient, et dans lequel l'appareil de reproduction est adapté pour reproduire les unités de données en se référant à l'ensemble d'adresses de début, et le signal de reproduction subit une reproduction en mode d'avance rapide.

55. Le système de communication selon l'une des revendications 48 à 54, dans lequel lorsque l'unité de données contient les données vidéo qui sont déterminées dans la norme MPEG, le groupe de navigation contient une information d'adresse de fin indiquant l'adresse dans l'unité de données à laquelle sont enregistrées les données minimales capables de former une visualisation d'une image I, et dans lequel l'appareil de reproduction est adapté pour acquérir les données minimales pour reproduire l'image I en se référant à cette adresse.

56. Le système de communication selon l'une des revendications 48 à 55, dans lequel le groupe de navigation (86) d'une unité de données contenant des données vidéo et au moins un type de données parmi des données audio et des données de sous-image, contient une information de synchronisation pour au moins un type de données parmi les données audio et les données de sous-image à reproduire en synchronisme avec les données vidéo, et dans lequel l'appareil est adapté pour reproduire au moins les données audio ou les données de sous-image, conjointement aux données vidéo, en se référant à l'information de synchronisation.

57. Le système de communication selon l'une des revendications 48 à 56, dans lequel la liste d'adresses de début de l'information de recherche des secondes données de commande du groupe de navigation contient les adresses de début des 15 unités de données à reproduire immédiatement avant et après l'unité de données respective à laquelle le groupe de navigation appartient, et les adresses de

début des 20-ième, 30-ième, 60-ième, 120-ième et 240-ième unités de données à reproduire avant et après l'unité de données respective.

58. Le système de communication selon l'une des revendications 48 à 57, dans lequel l'information de recherche a une description spécifique lorsqu'une unité de données à rechercher n'existe pas.

59. Le système de communication selon l'une des revendications 48 à 58, dans lequel l'information de recherche contient un drapeau (V\_FWD\_Exist2, V\_BWD\_Exist2) indiquant si l'unité de données ou les unités de données entre l'unité de données respective et une unité de données qui est désignée par chaque adresse de début dans la liste d'adresses de début de l'information de recherche, contiennent des données vidéo ou non.

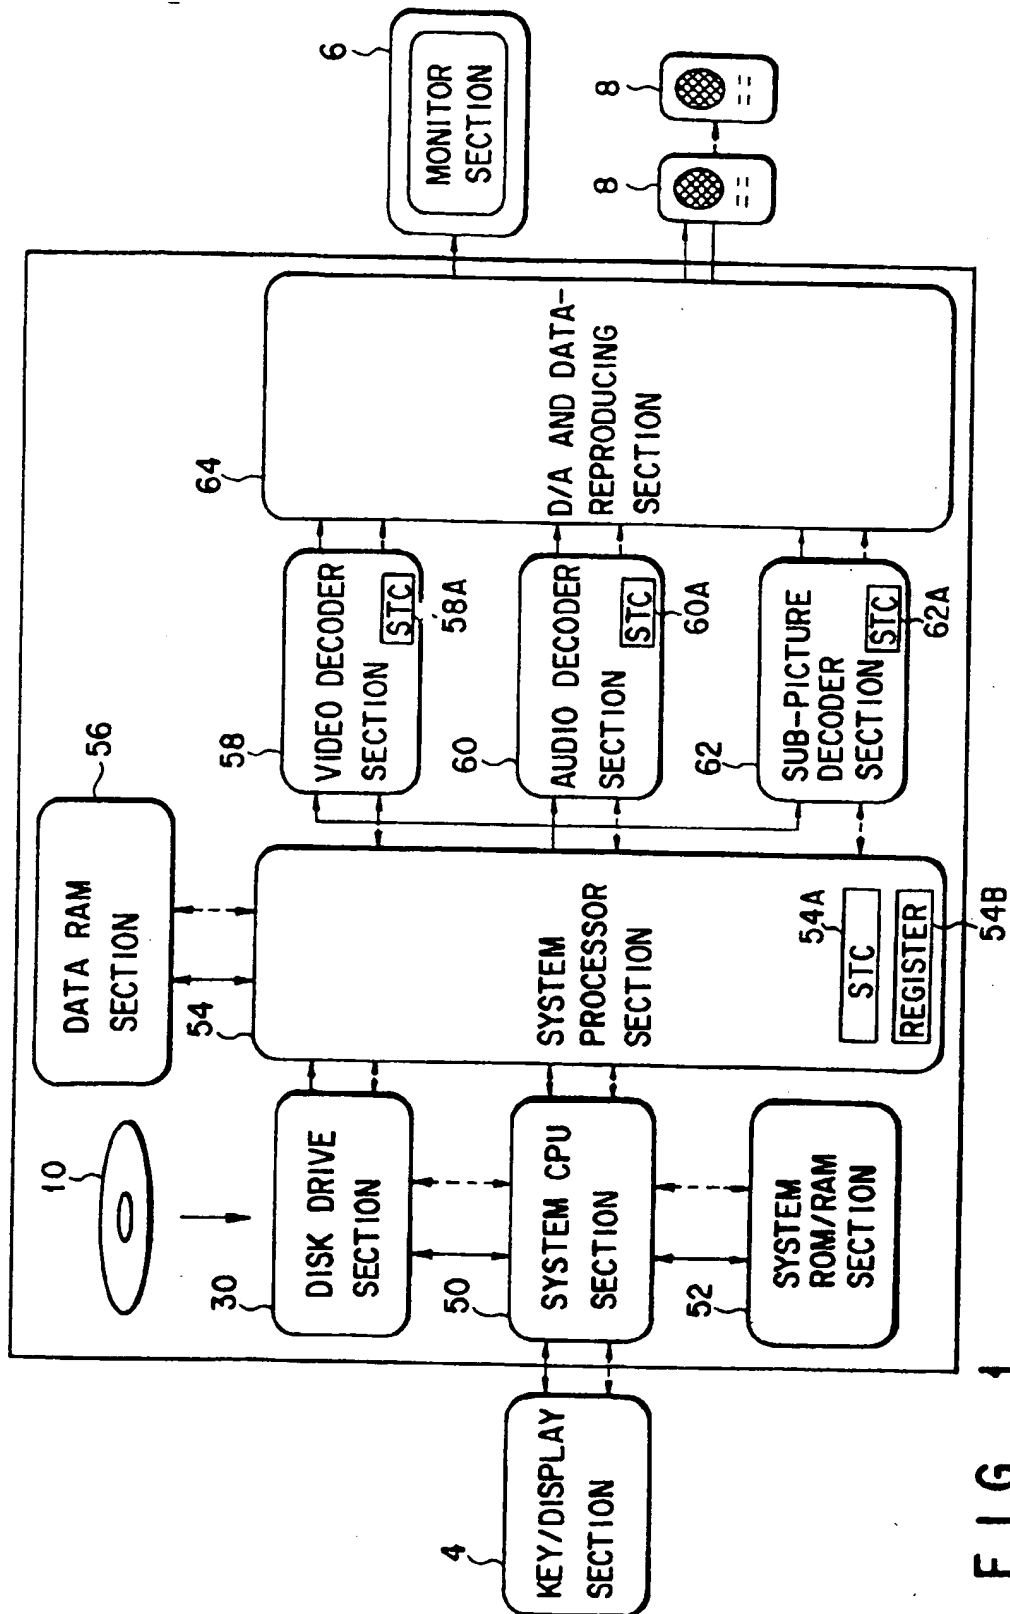


FIG. 1

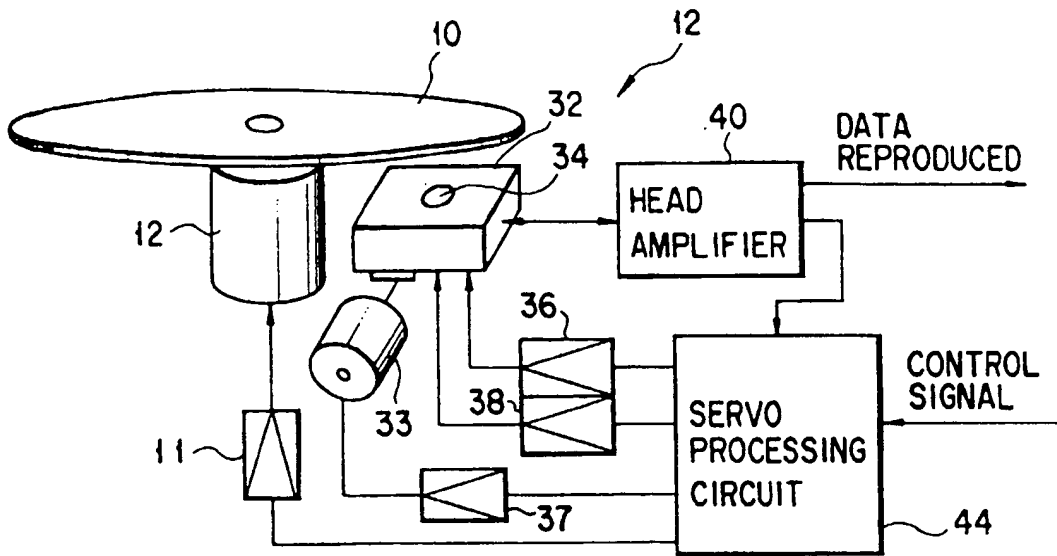


FIG. 2

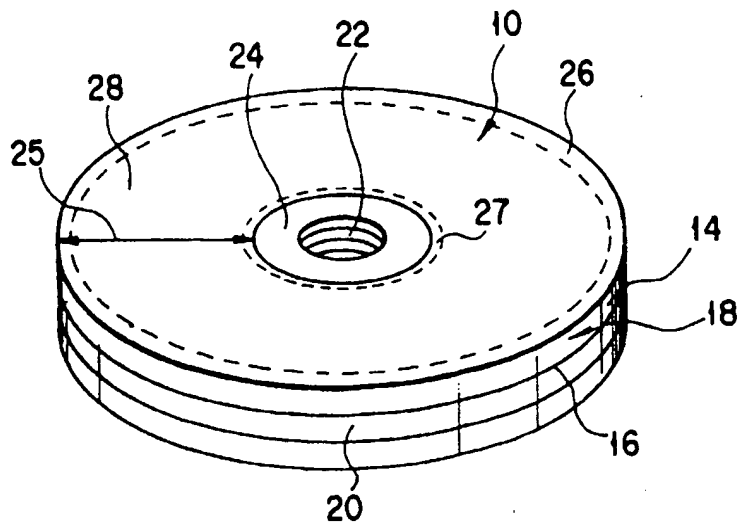


FIG. 3

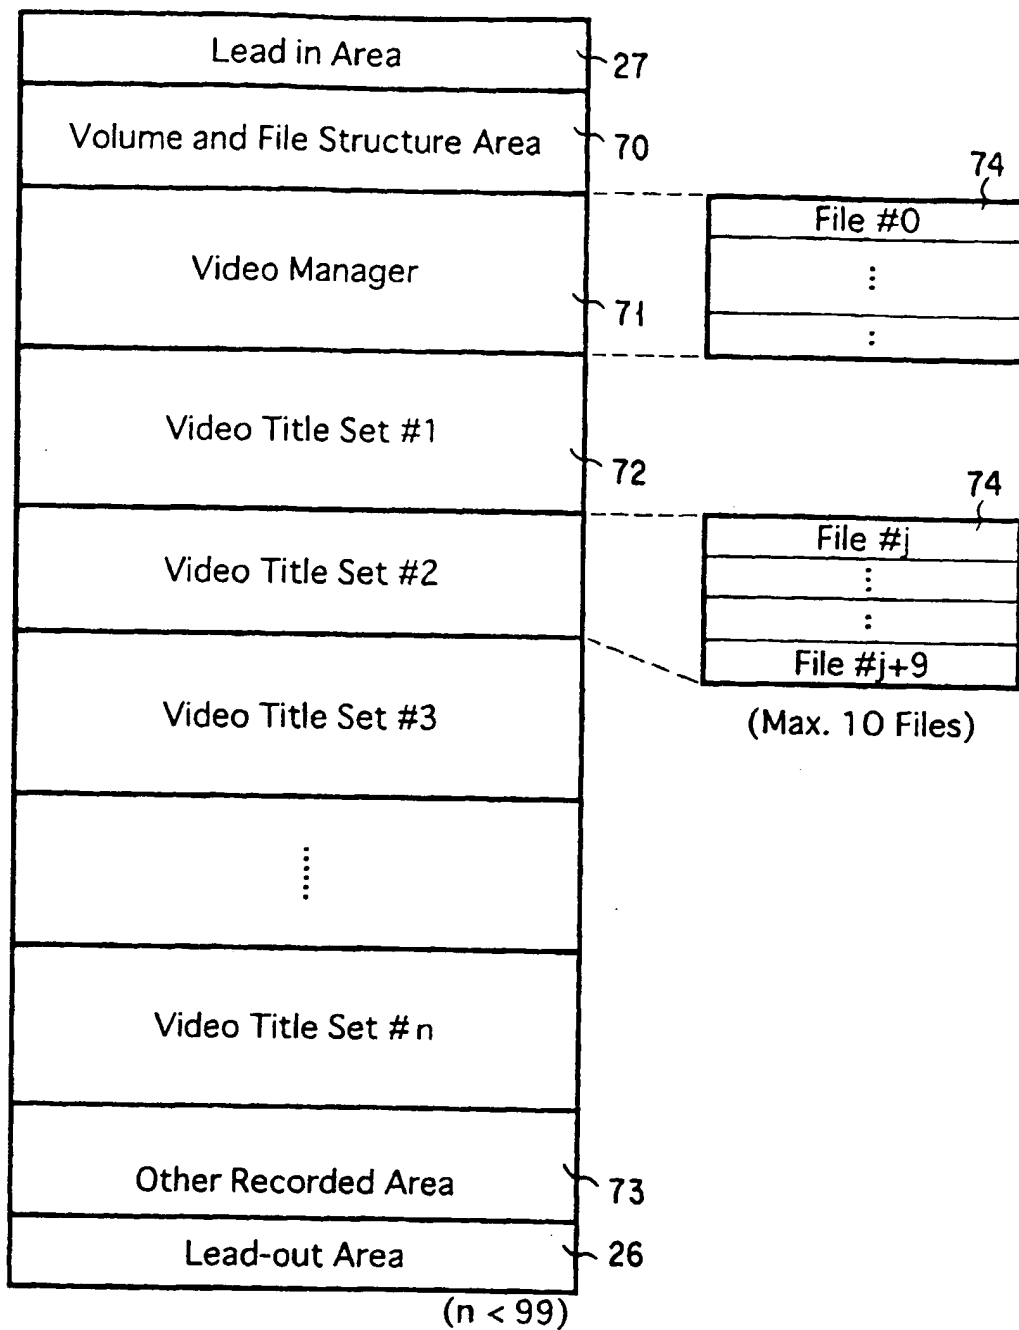


FIG. 4

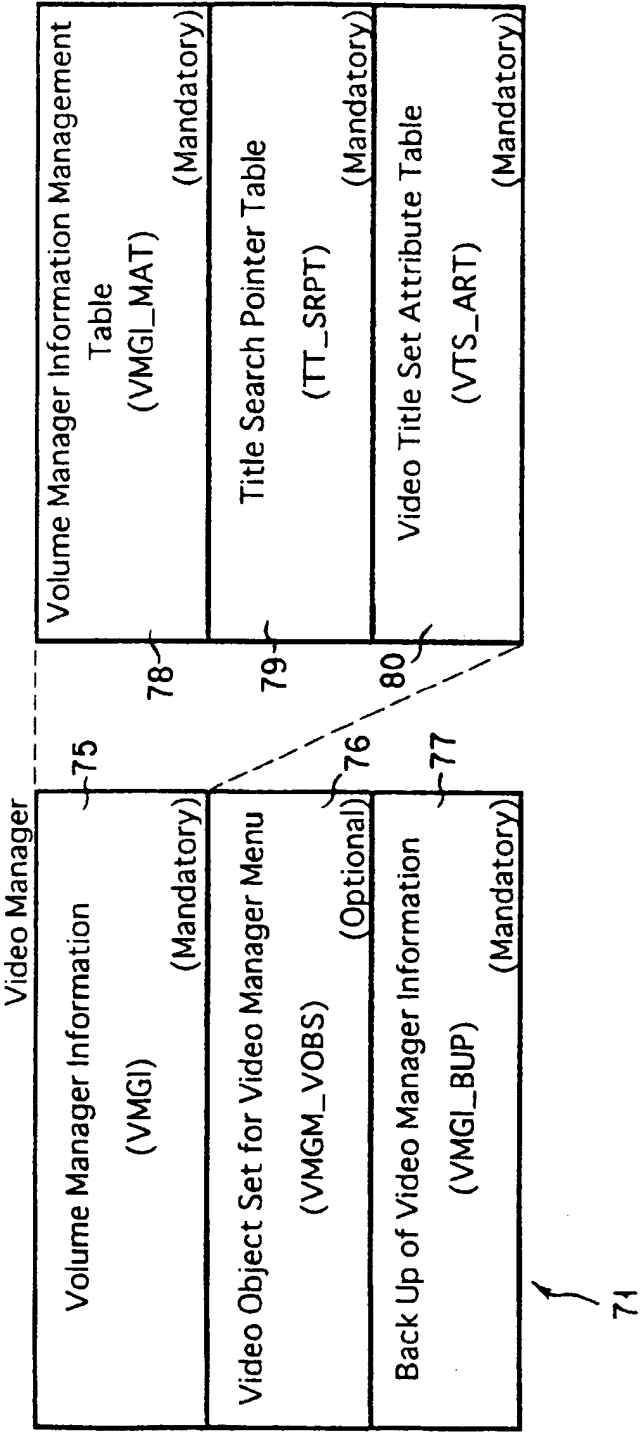


FIG. 5

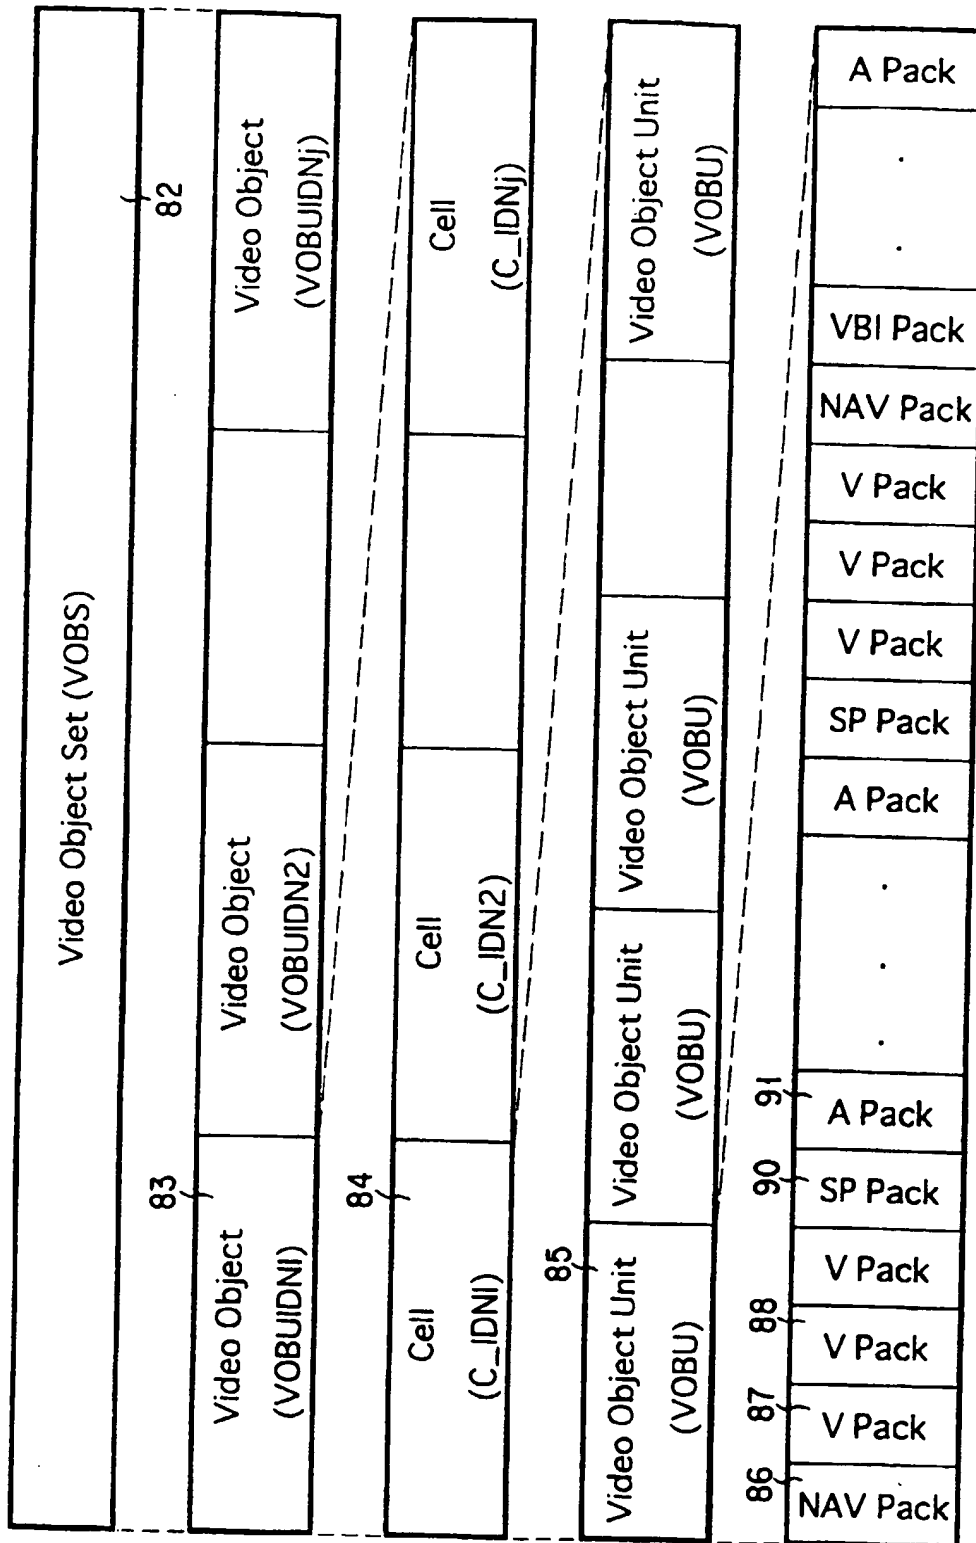


FIG. 6

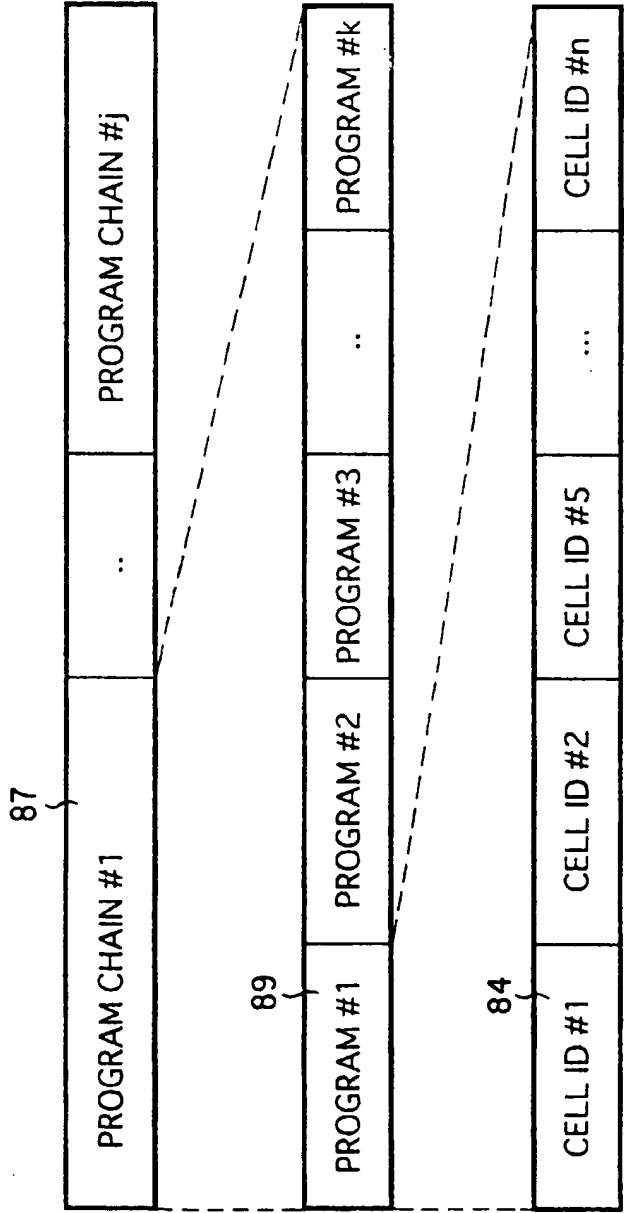



FIG. 7



VMGI MAT	Content	(Description order)
VMG_ID	Video Manager Identifier	
VMGI_SZ	Size of Video Manager Information	
VERN	Version Number of DVD Video Specification	
VMG_CAT	Video Manager Category	
VLMS_ID	Volume Set Identifier	
VTS_Ns	Number of Video Title Set	
PVR_ID	Provider Unique ID	
VMGM_VOBS_SA	Video Manager Menu Video Object Set Start Address	
VMGI_MAT_EA	End Address of VMGI_MAT	
TT_SRPT_SA	Start Address of TT_SRPT	
VTS_ATRT_SA	Start Address of VTS_ATRT	
VMGM_V_ATR	Video Attribute of VMGM	
VMGM_AST_Ns	Number of Audio Stream of VMGM	
VMGM_AST_ATR	Audio Stream Attribute of VMGM	
VMGM_SPST_Ns	Number of Sub-picture Stream of VMGM	
VMGM_SPST_ATR	Sub-picture Stream Attribute of VMGM	

FIG. 8

TT\_SRPT

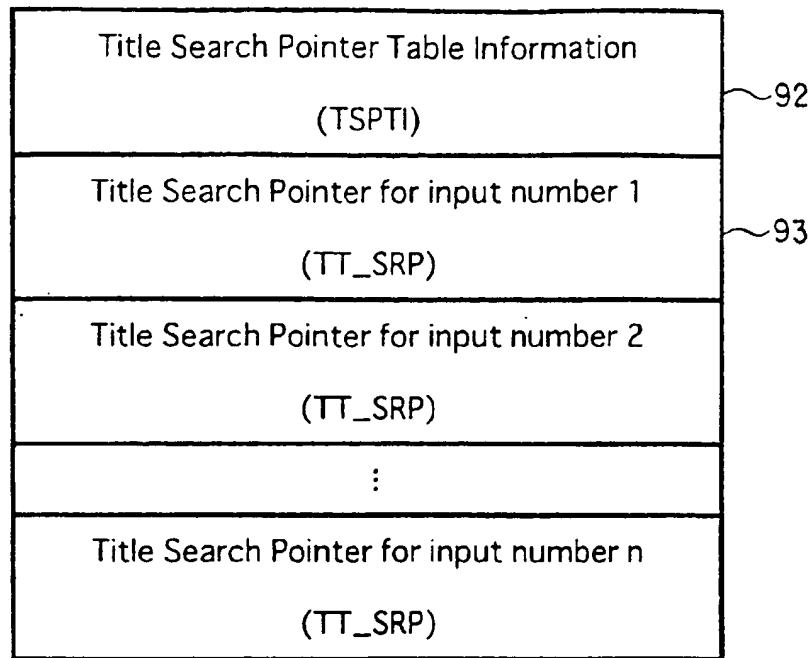

79

**FIG. 9**

TT_SRPTI	(Description order)
	Content
EN_PGC_Ns	Number of Entry PGC
TT_SRPT_EA	End Address of TT_SRPT

**FIG. 10**

TT_SRP	(Description order)
	Content
VTSN	Video Title Set Number
PGCN	Program Chain Number
VTSA	Start Address of Video Title Set

**FIG. 11**

Video Title Set

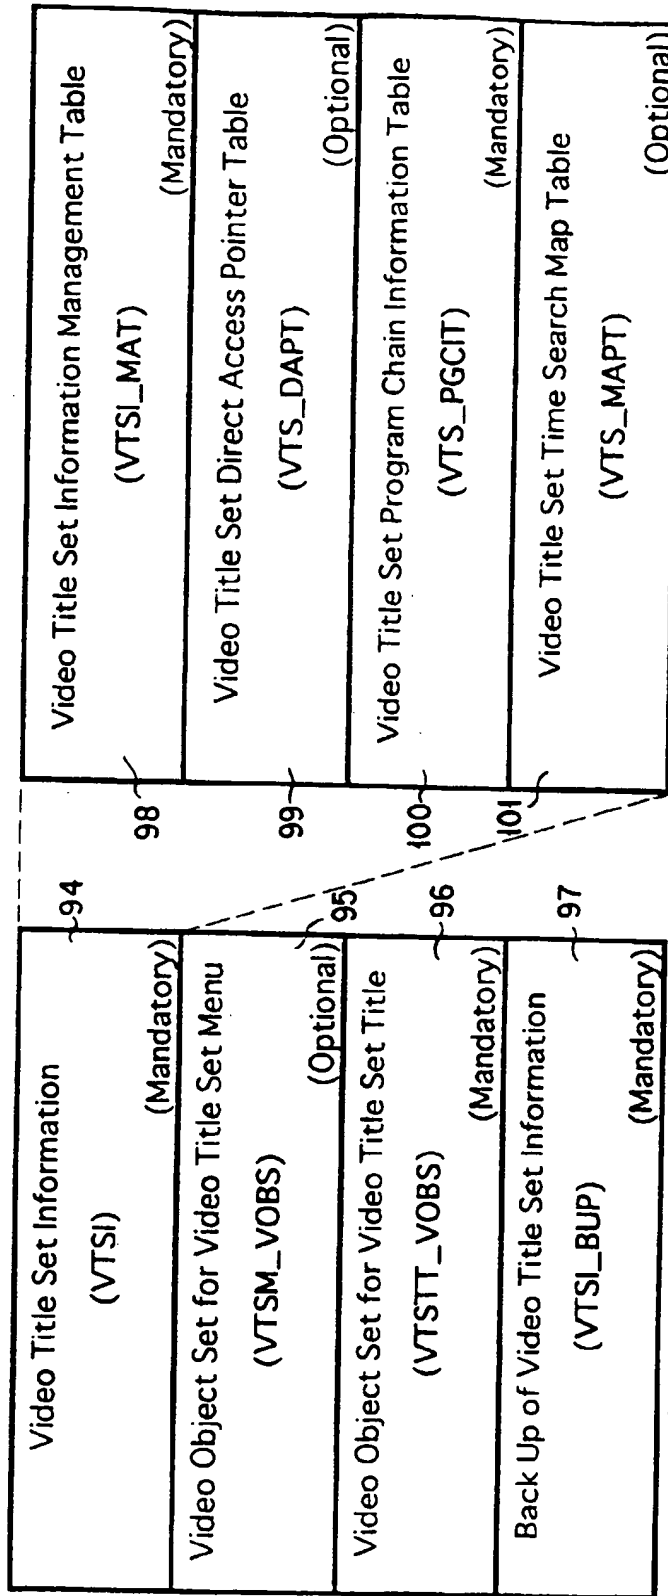


FIG. 12

<u>VTSL_MAT</u>	<u>Content</u>	<u>(Description order)</u>
<u>VTSL_ID</u>	Video Title Set Identifier	
<u>VTSL_SZ</u>	Size of the VTS	
<u>VERN</u>	Version Number of DVD_Video Specification	
<u>VTSL_CAT</u>	Video Title Set Category	
<u>VTSM_VOB_SA</u>	Start Address of VTSM_VOBS	
<u>VTSTT_VOB_SA</u>	Start Address of VTSTT_VOBS	
<u>VTI_MAT_EA</u>	End Address of VTSL_MAT	
<u>VTSL-DAPT-SA</u>	Start Address of VTS_DAPT	
<u>VTSL_PGCIT_SA</u>	Start Address of VTS_PGCIT	
<u>VTSL_PGCIT_UT_SA</u>	Start Address of VTS_PGCIT_UT	
<u>VTSL_MAPT_SA</u>	Start Address of VTS_MAPT	
<u>VTSL_V_ATR</u>	Video Attribute	
<u>VTSL_AST_Ns</u>	Number of Audio Streams for VTS	
<u>VTSL_AST_ATR</u>	Audio Stream Attribute for VTS	
<u>VTSL_SPST_Ns</u>	Number of Sub-picture Streams for VTS	
<u>VTSL_SPST_ATR</u>	Sub-picture Stream Attribute for VTS	
<u>VTSM_AST_Ns</u>	Number of Audio Streams for VTSM	
<u>VTSM_AST_ATR</u>	Audio Stream Attribute for VTSM	
<u>VTSL_SPST_Ns</u>	Number of Sub-picture Streams for VTSM	
<u>VTSL_SPST_ATR</u>	Sub-picture Stream Attribute for VTSM	

FIG. 13

VTS\_PGCIT

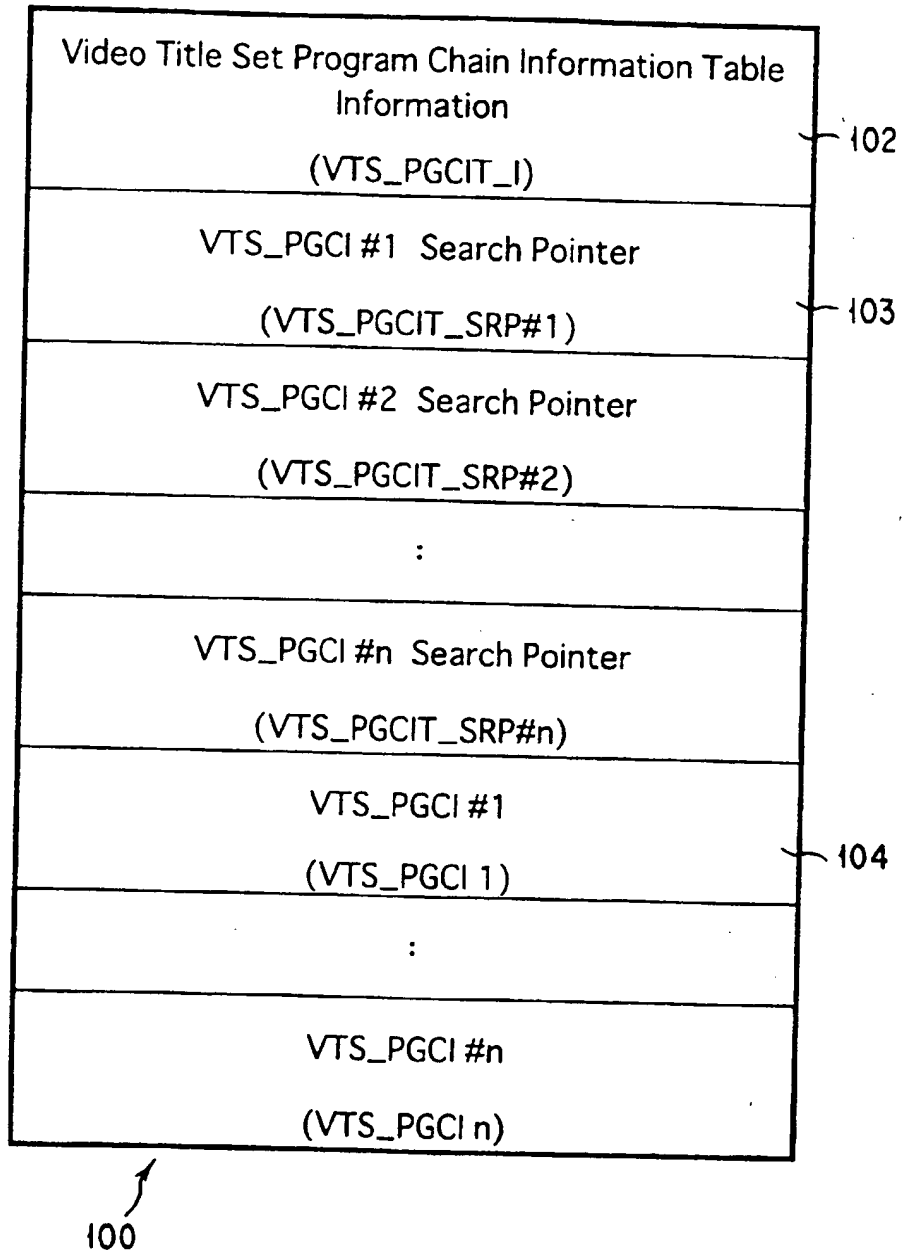


FIG. 14

VTS\_PGCIT\_I

	(Description order)
	Content
VTS_PGC_Ns	Number of VTS_PGCs
VTS_PGCIT_EA	End Address of VTS_PGCCIT

FIG. 15

VTS\_PGCIT\_SRP

	(Description order)
	Content
VTS_PGC_CAT	Video Title Set PGC category
VTS_PGCI_SA	Start Address of VTS_PGC Information

FIG. 16

VTS\_PGCI

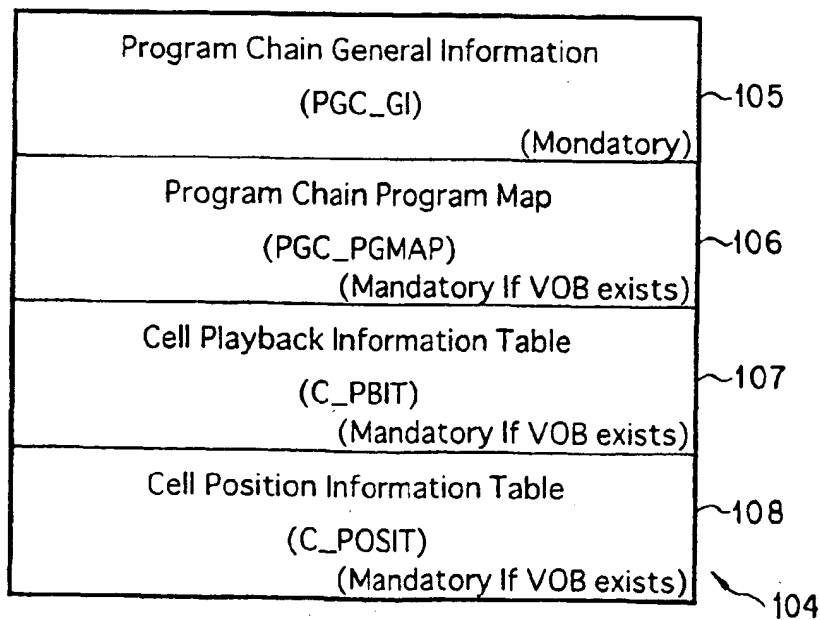


FIG. 17

PGCI\_GI

	(Description order)
	Content
PGCI_CAT	PGC Category
PGC_CNT	PGC Content
PGC_PB_TIME	PGC Playback Time
PGC_SPST_CTL	PGC-Sub-picture Stream Control
PGC_AST_CTL	PGC Audio Stream Control
PGC_SP_PLT	PGC Sub-picture Palette
C_PBIT_SA	Start Address of C_PBIT
C_POSIT_SA	Start Address of C_POSIT

**FIG. 18**

PGC\_PGMAP

Entry Cell Number for Program #1
Entry Cell Number for Program #2
:
:
Entry Cell Number for Program #n

**FIG. 19**

Entry cell number

	Content
ECELLN	Entry Cell Number

**FIG. 20**

C\_PBIT

Cell Playback Information #1 (C_PBI1)
Cell Playback Information #2 (C_PBI2)
:
:
Cell Playback Information #n (C_PBI <sub>n</sub> )

**FIG. 21**

C_PBI	Content
C_CAT	Cell Category
C_PBTM	Cell Playback Time
C_FVOBU_SA	Start Address of the First VOB in the Cell
C_LVOBU_SA	Start Address of the Last VOB in the Cell

## FIG. 22

C\_POSI

Cell Position Information #1 (C_POSIT1)
:
Cell Position Information #n (C_POSITn)

## FIG. 23

C_POSI	Content
C_VOB_IDN	VOB ID Number of Cell
C_IDN	Cell ID Number of the Cell

## FIG. 24



FIG. 25


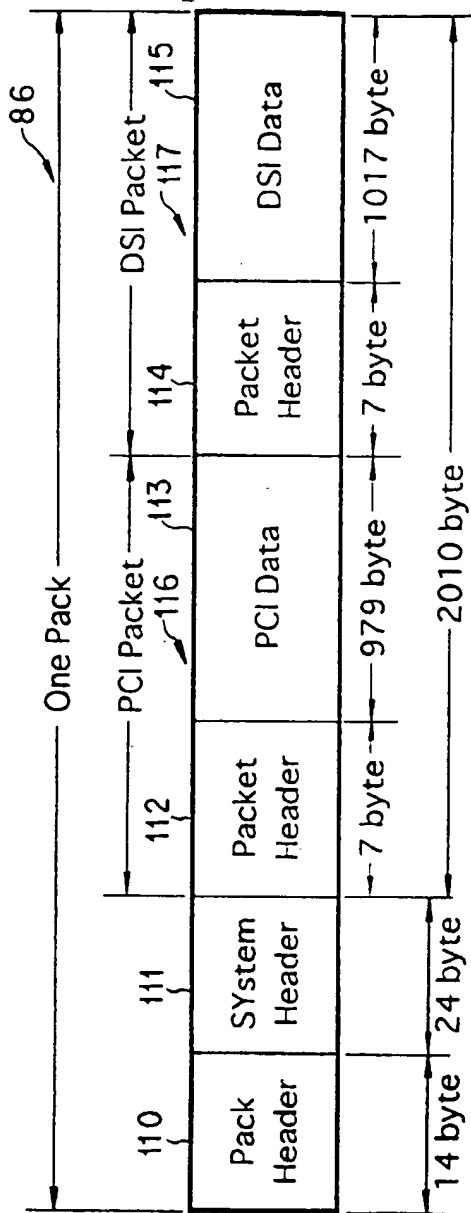


FIG. 26

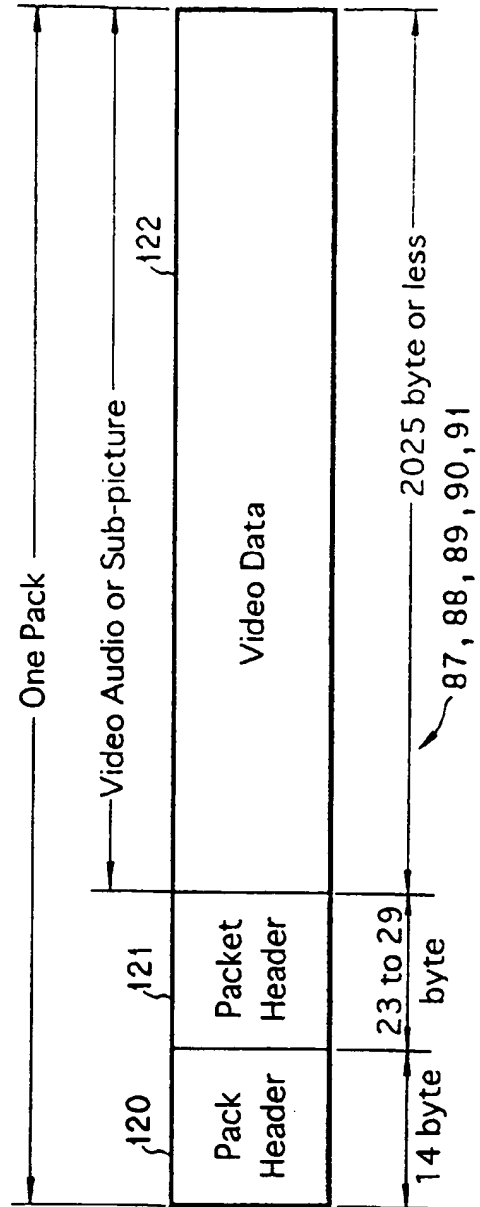

PCI	
	Content
PCI_GI	PCI General Information
NSLS_ANGLI	Angle Information

**FIG. 27**

PCI_GI	
	Content
NV_PCK_LBN	LBN of NV Pack
VOBU_CAT	Category of VOB
VOBU_SPTS	Start PTS of VOB
VOBU_EPTS	End PTS of VOB

**FIG. 28**

NSLS\_ANGLI

	Content
NSLS_ANGC1_DSTA	Destination Address of Angle Cell Number 1
NSLS_ANGC2_DSTA	Destination Address of Angle Cell Number 2
NSLS_ANGC3_DSTA	Destination Address of Angle Cell Number 3
NSLS_ANGC4_DSTA	Destination Address of Angle Cell Number 4
NSLS_ANGC5_DSTA	Destination Address of Angle Cell Number 5
NSLS_ANGC6_DSTA	Destination Address of Angle Cell Number 6
NSLS_ANGC7_DSTA	Destination Address of Angle Cell Number 7
NSLS_ANGC8_DSTA	Destination Address of Angle Cell Number 8
NSLS_ANGC9_DSTA	Destination Address of Angle Cell Number 9

**FIG. 29**

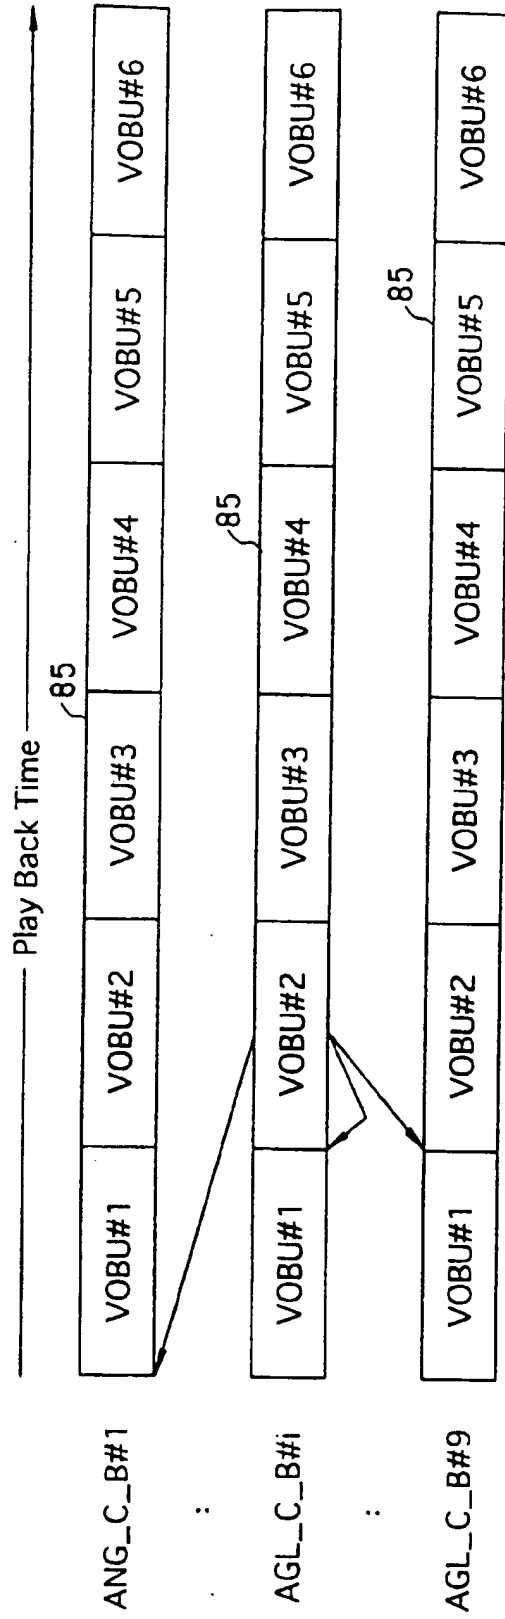


FIG. 30

DSI

	Content
DSI_GI	DSI General Information
SML_AGLI	Angle Information
VOBU_SI	VOB Search Information
SYNCl	Synchronous Playback Information

**FIG. 31**

DSI\_GI

	Content
NV_PCK_SCR	SCR of NV Pack
NV_PCK_LBN	LBN of NV Pack
VOBU_EA	VOBU End Address
VOBU_IP_EA	First I-picture End Address
VOBU_VOB_IDN	VOB ID Number
VOBU_C_IDN	Cell ID Number

**FIG. 32**

SML\_AGLI

	Content
SML_ANG1_DSTA	Destination Address of Angle Cell Number 1
SML_ANG2_DSTA	Destination Address of Angle Cell Number 2
SML_ANG3_DSTA	Destination Address of Angle Cell Number 3
SML_ANG4_DSTA	Destination Address of Angle Cell Number 4
SML_ANG5_DSTA	Destination Address of Angle Cell Number 5
SML_ANG6_DSTA	Destination Address of Angle Cell Number 6
SML_ANG7_DSTA	Destination Address of Angle Cell Number 7
SML_ANG8_DSTA	Destination Address of Angle Cell Number 8
SML_ANG9_DSTA	Destination Address of Angle Cell Number 9

**FIG. 33**

SYNCl

	Content
A_SYNCA 0 to 7	Target Audio Pack Address
SP_SYNCA 0 to 31	VOBU Start Address of Target SP pack

**FIG. 36**


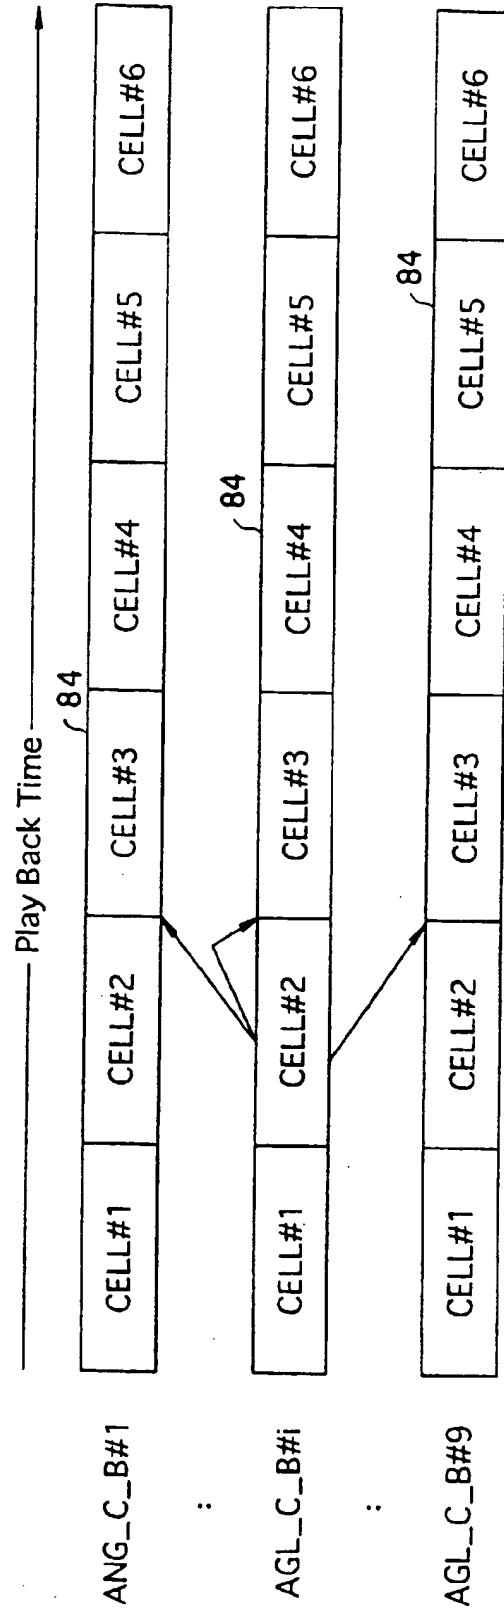



FIG. 34

VOBU_SI	Content
FWDA240	+240 VOBUs Start Address
FWDA120	+120 VOBUs Start Address
FWDA60	+60 VOBUs Start Address
FWDA20	+20 VOBUs Start Address
FWDA15	+15 VOBUs Start Address
FWDA14	+14 VOBUs Start Address
FWDA13	+13 VOBUs Start Address
FWDA12	+12 VOBUs Start Address
FWDA11	+11 VOBUs Start Address
FWDA10	+10 VOBUs Start Address
FWDA9	+9 VOBUs Start Address
FWDA8	+8 VOBUs Start Address
FWDA7	+7 VOBUs Start Address
FWDA6	+6 VOBUs Start Address
FWDA5	+5 VOBUs Start Address
FWDA4	+4 VOBUs Start Address
FWDA3	+3 VOBUs Start Address
FWDA2	+2 VOBUs Start Address
FWDA1	+1 VOBUs Start Address
BWDA1	-1 VOBUs Start Address
BWDA2	-2 VOBUs Start Address
BWDA3	-3 VOBUs Start Address
BWDA4	-4 VOBUs Start Address
BWDA5	-5 VOBUs Start Address
BWDA6	-6 VOBUs Start Address
BWDA7	-7 VOBUs Start Address
BWDA8	-8 VOBUs Start Address
BWDA9	-9 VOBUs Start Address
BWDA10	-10 VOBUs Start Address
BWDA11	-11 VOBUs Start Address
BWDA12	-12 VOBUs Start Address
BWDA13	-13 VOBUs Start Address
BWDA14	-14 VOBUs Start Address
BWDA15	-15 VOBUs Start Address
BWDA16	-16 VOBUs Start Address
BWDA20	-20 VOBUs Start Address
BWDA60	-60 VOBUs Start Address
BWDA120	-120 VOBUs Start Address
BWDA240	-240 VOBUs Start Address

FIG. 35A

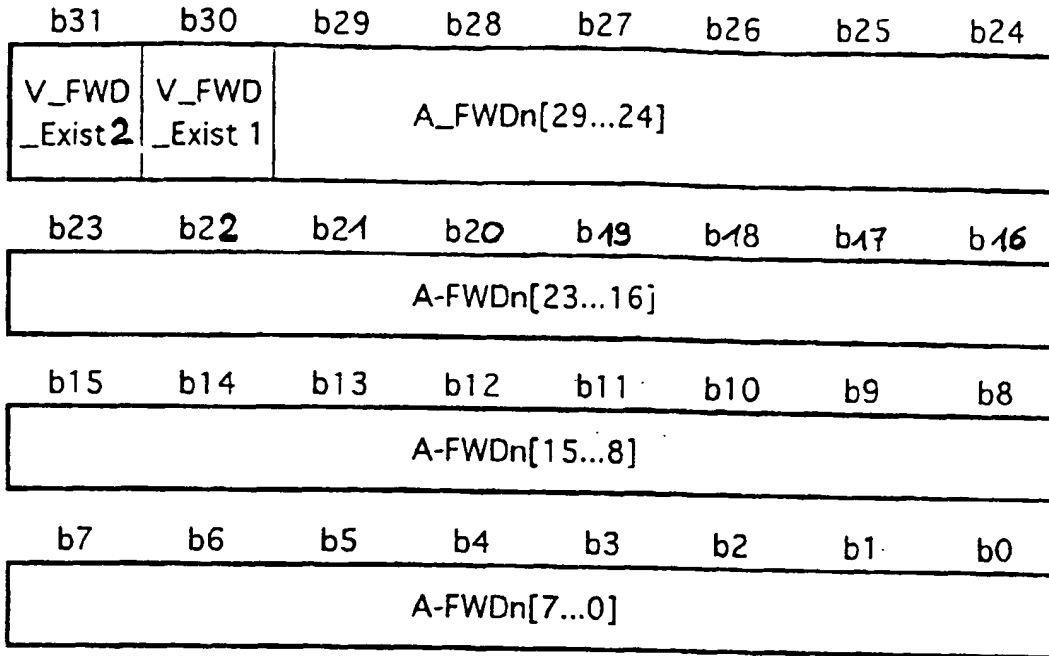

F I G. 35B

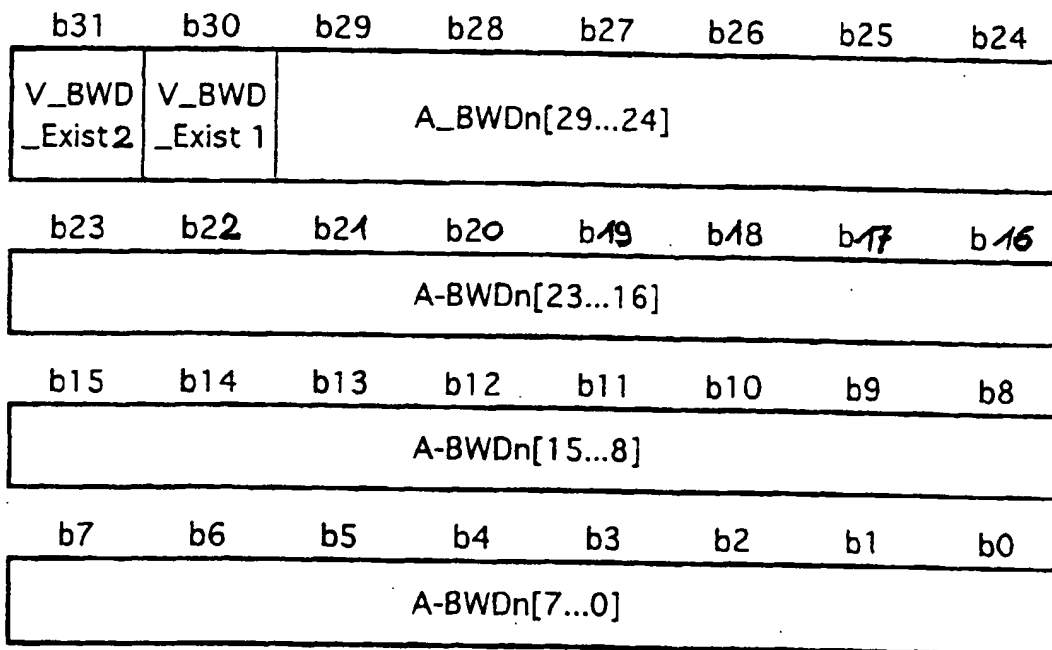

F I G. 35C

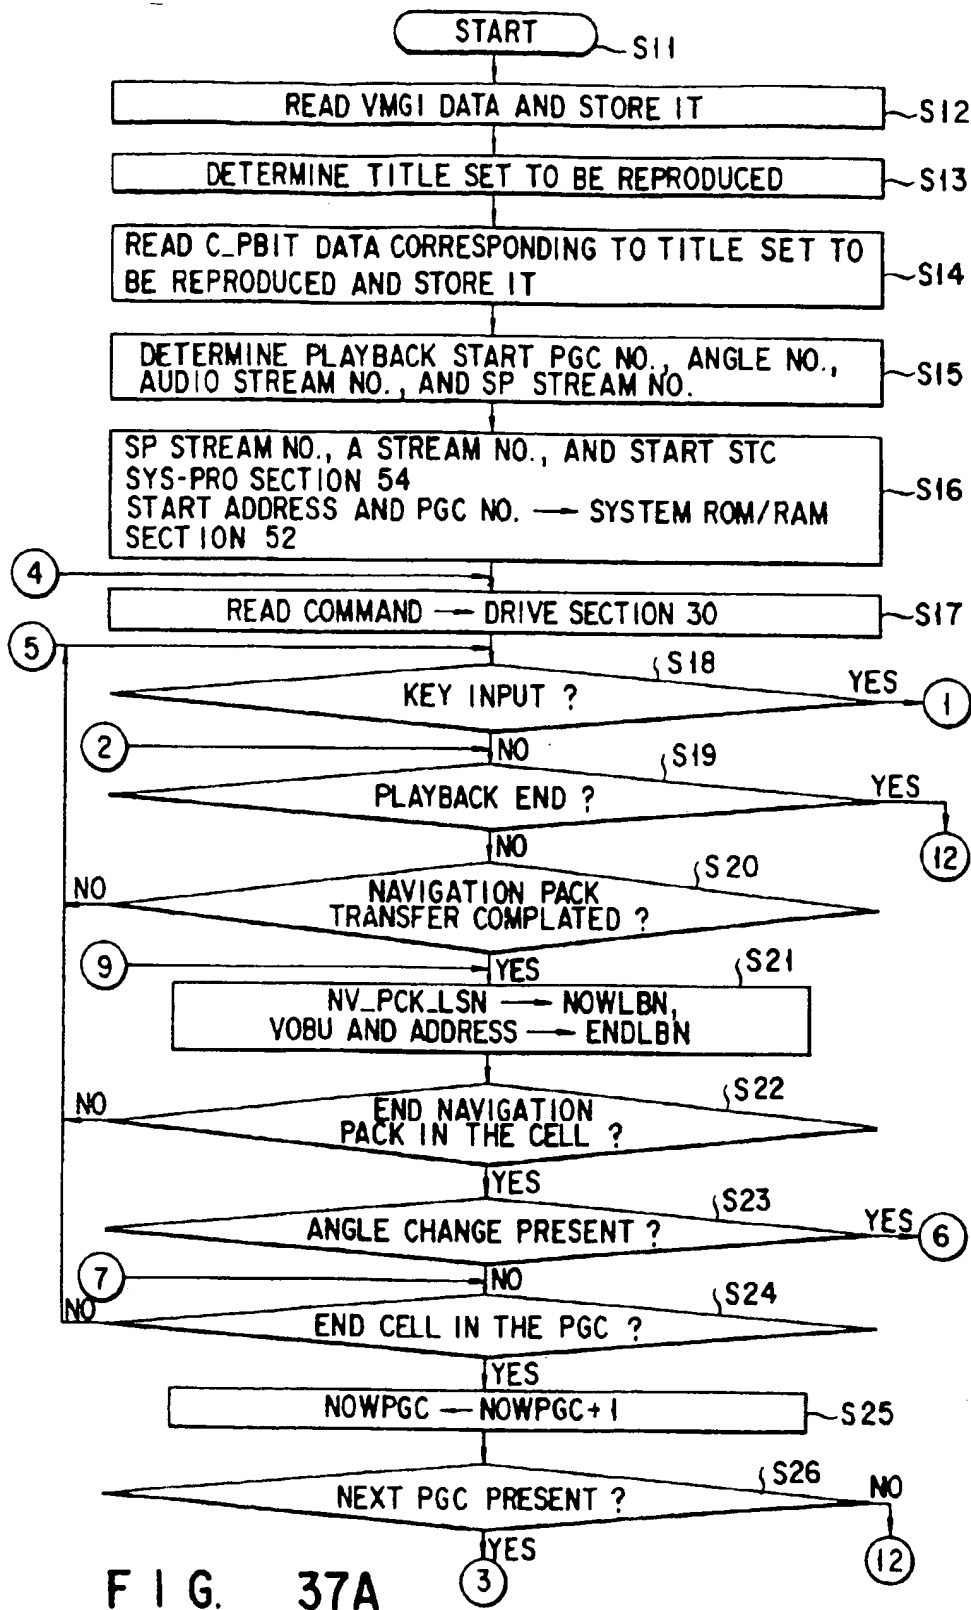
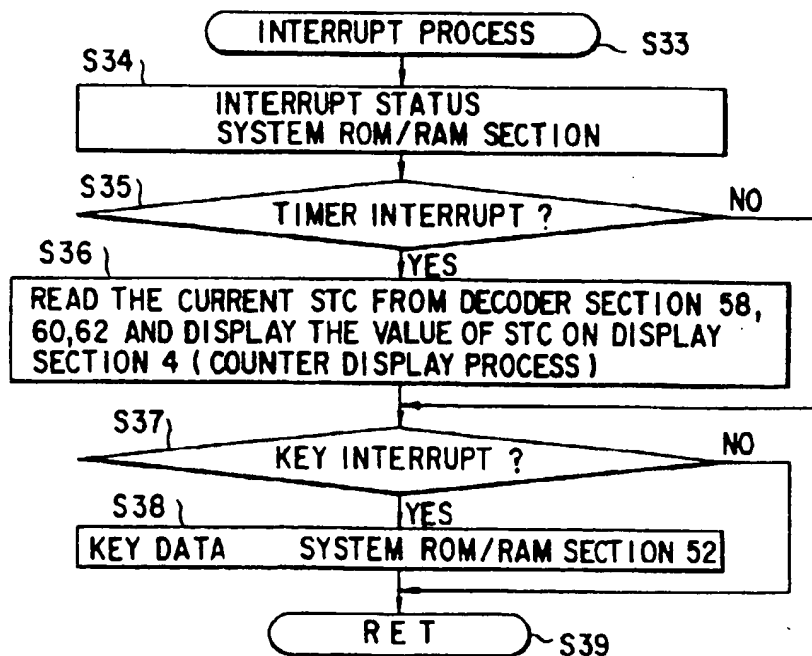
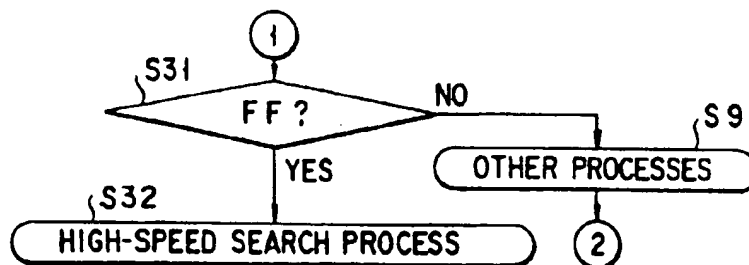
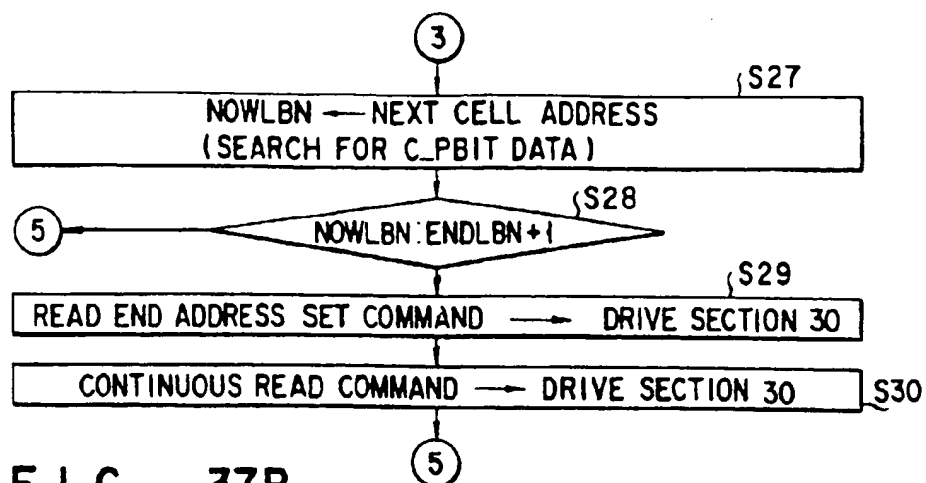


FIG. 37A





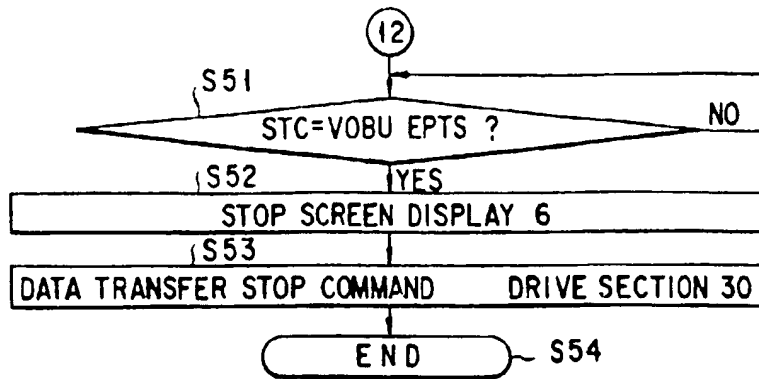


FIG. 38

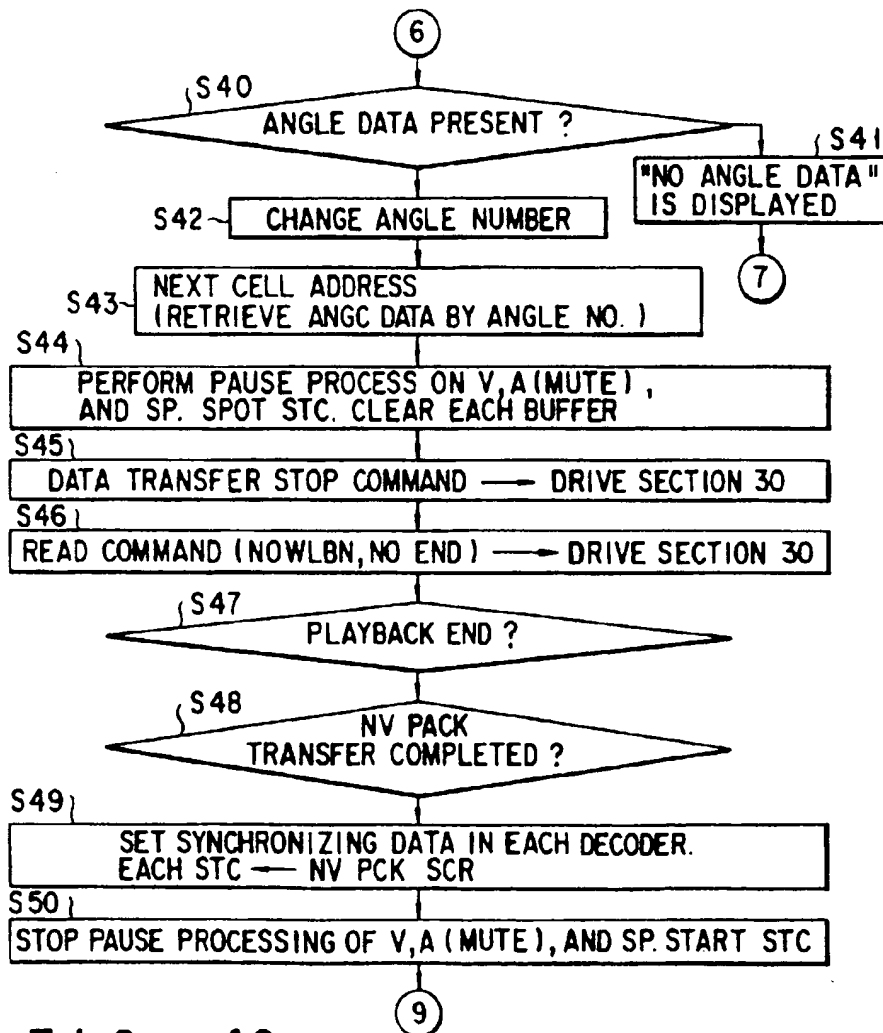


FIG. 40

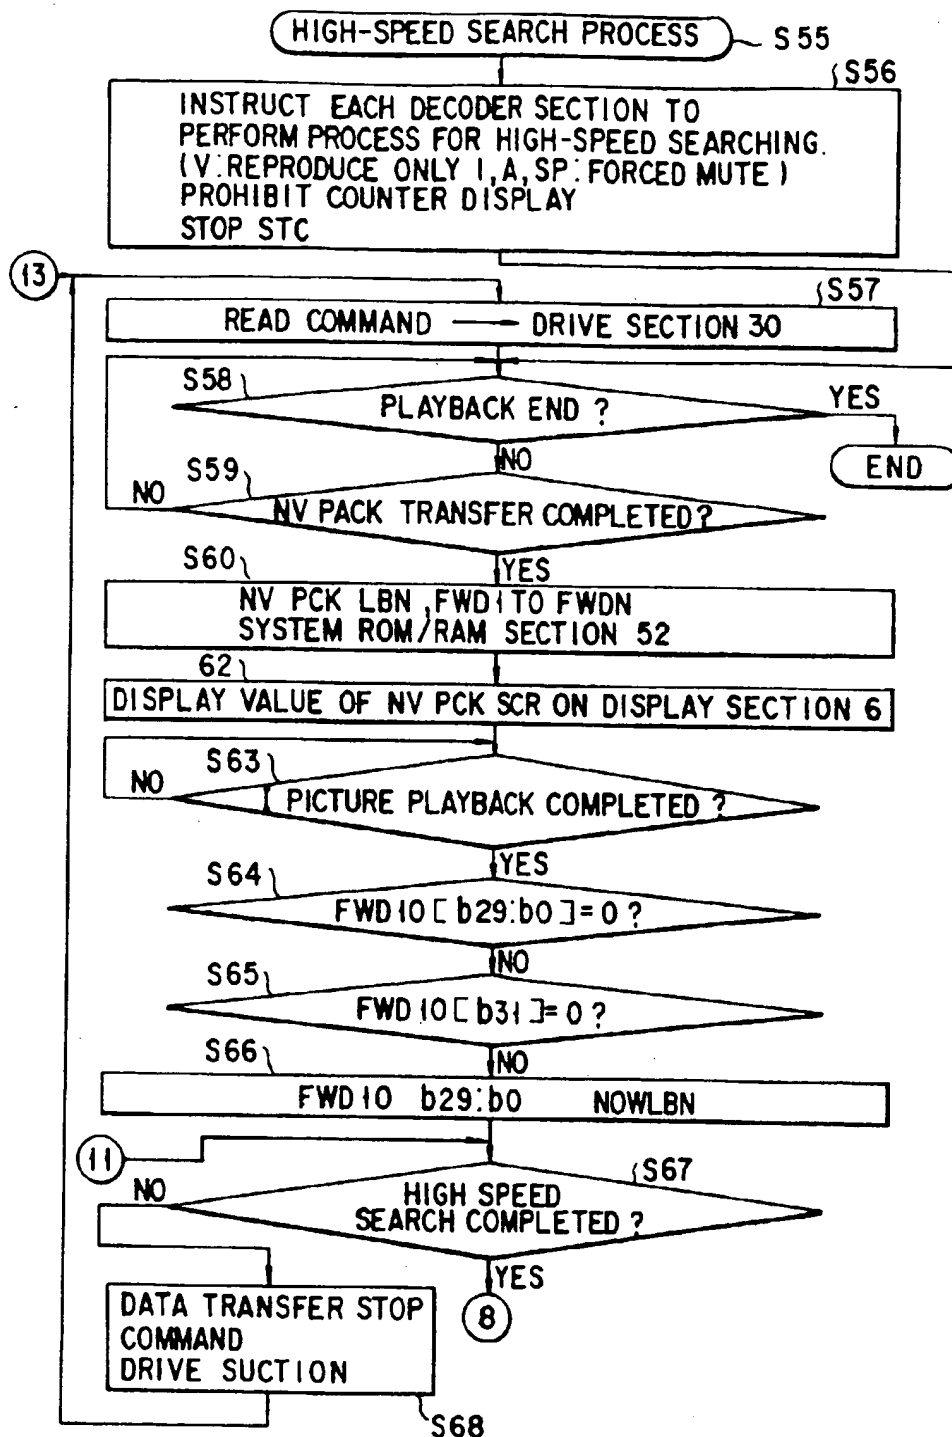


FIG. 42A

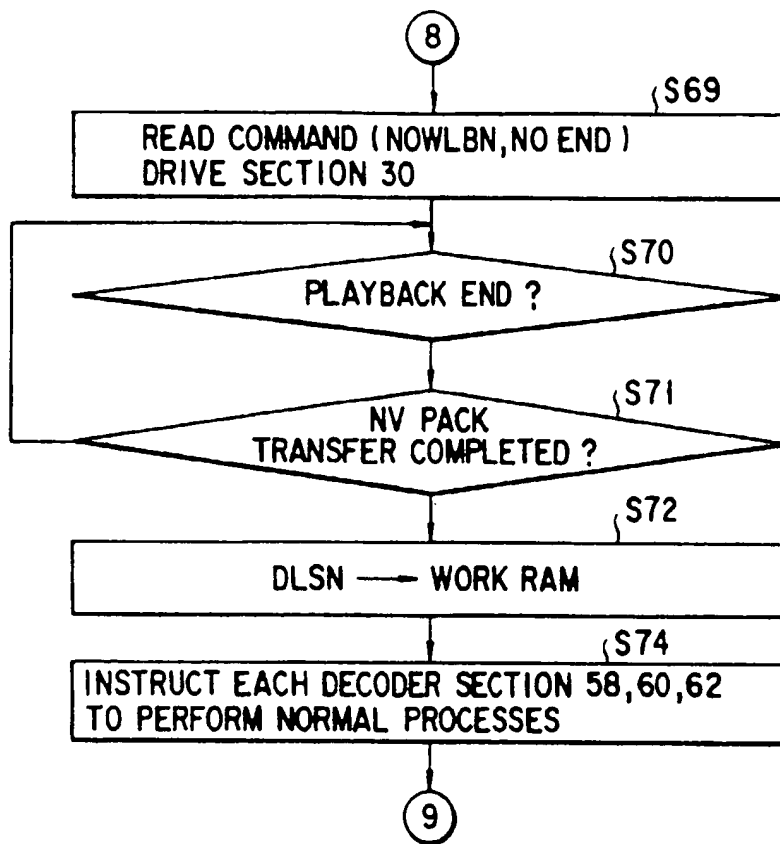


FIG. 42B

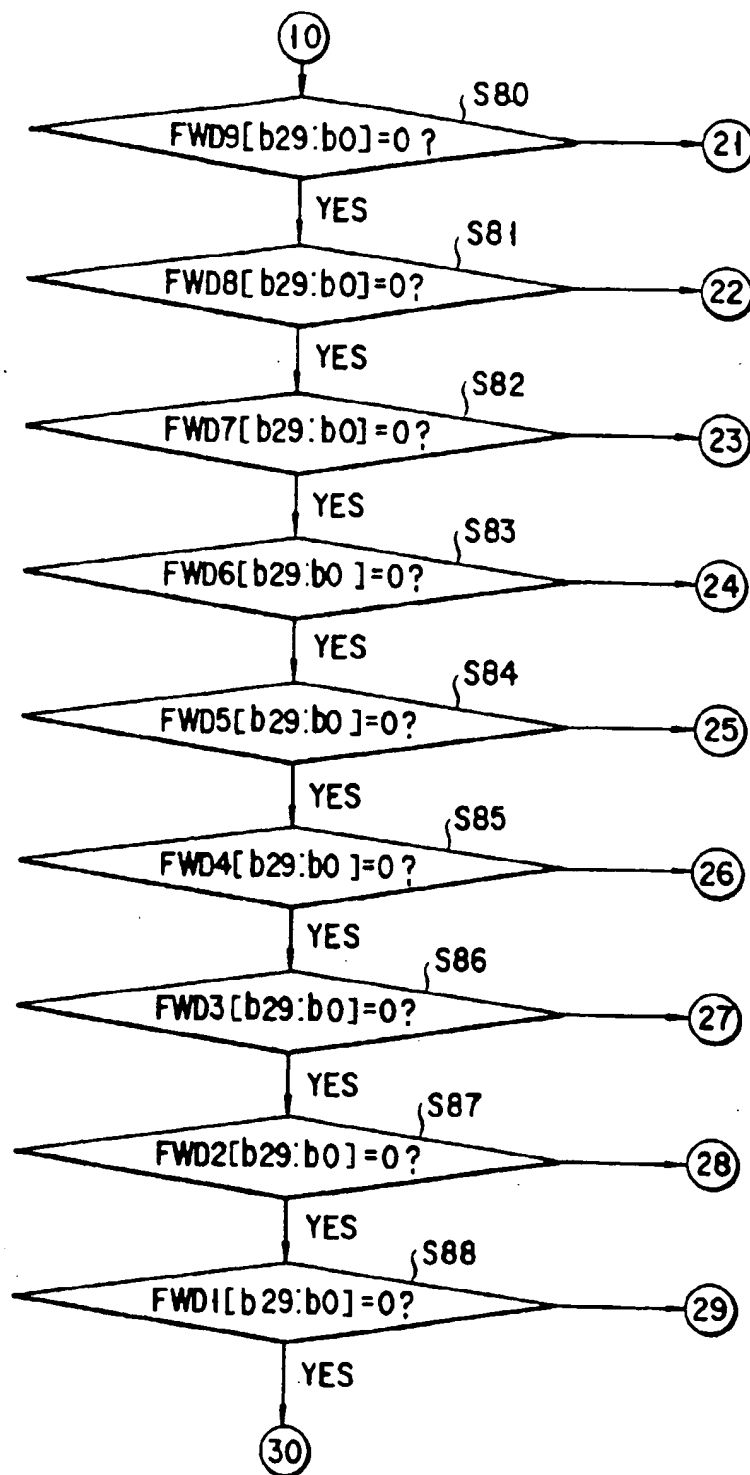


FIG. 42C

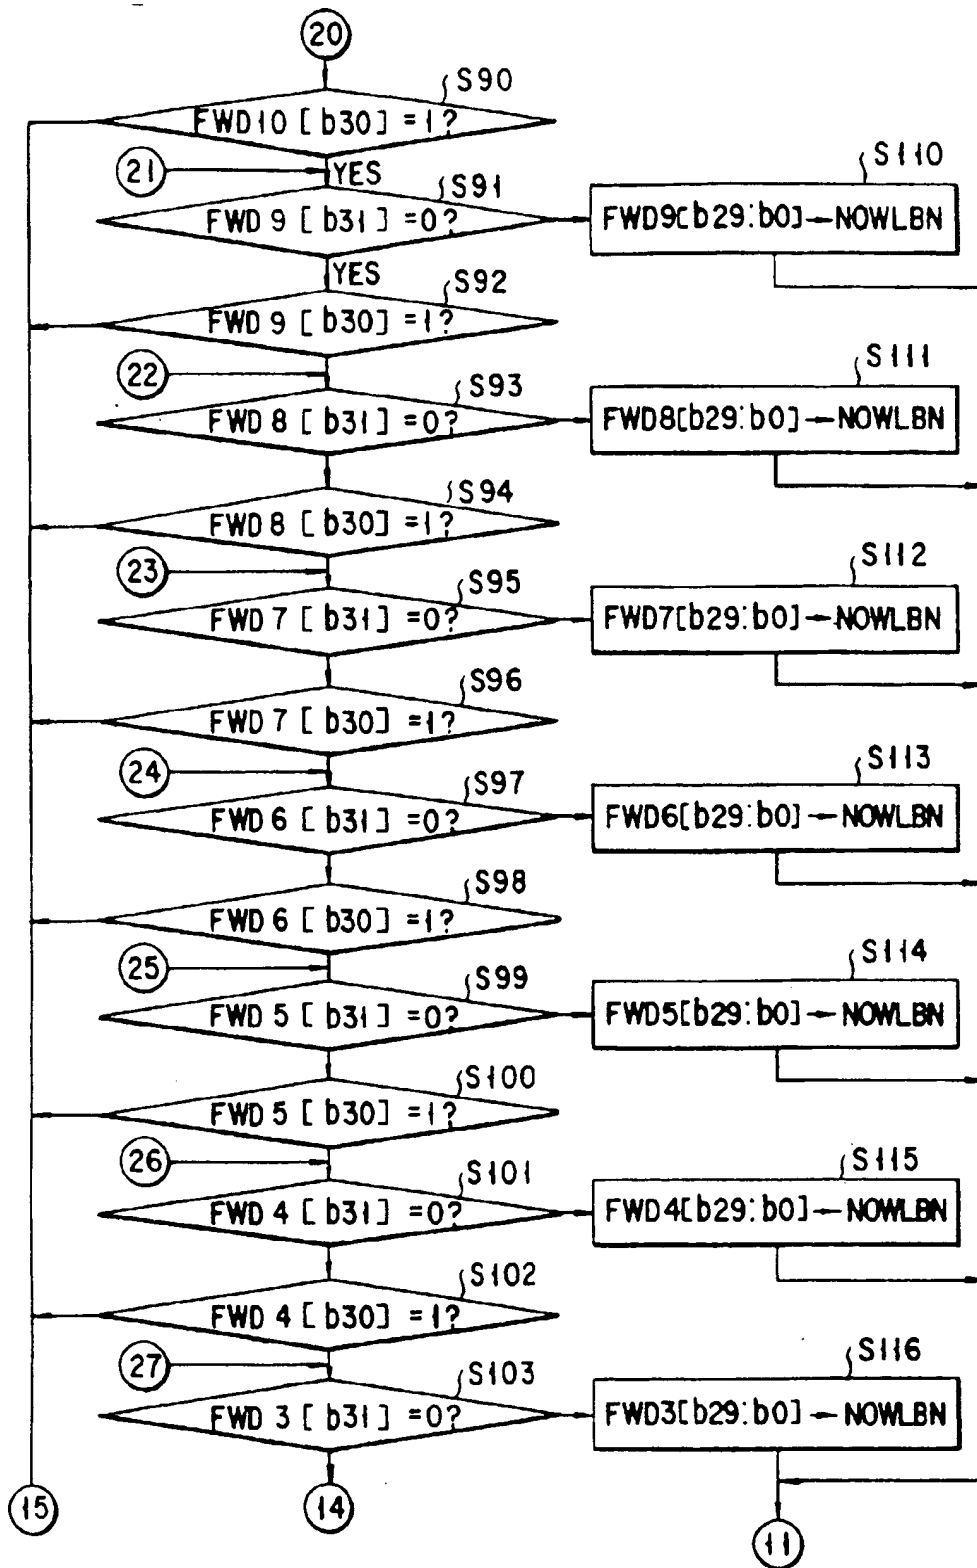


FIG. 42D

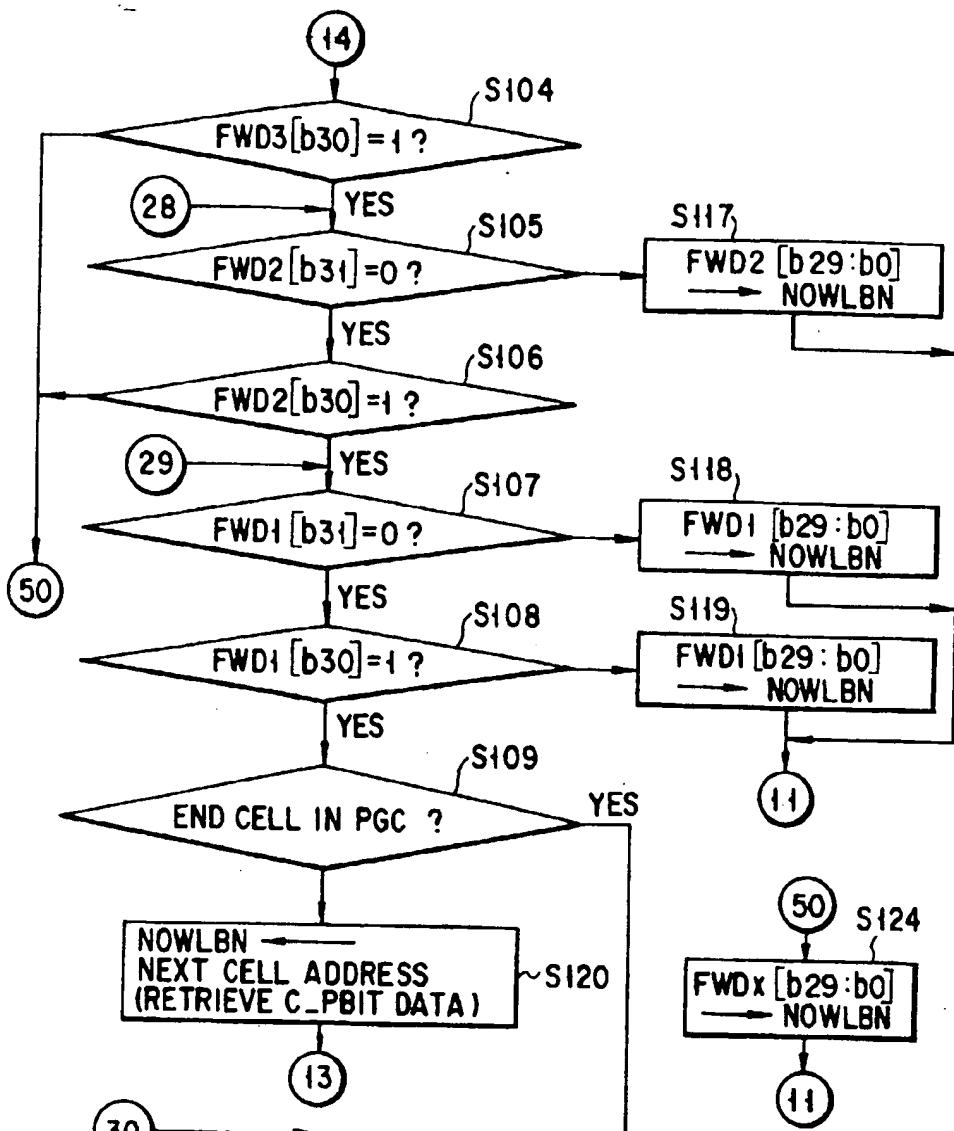


FIG. 42F

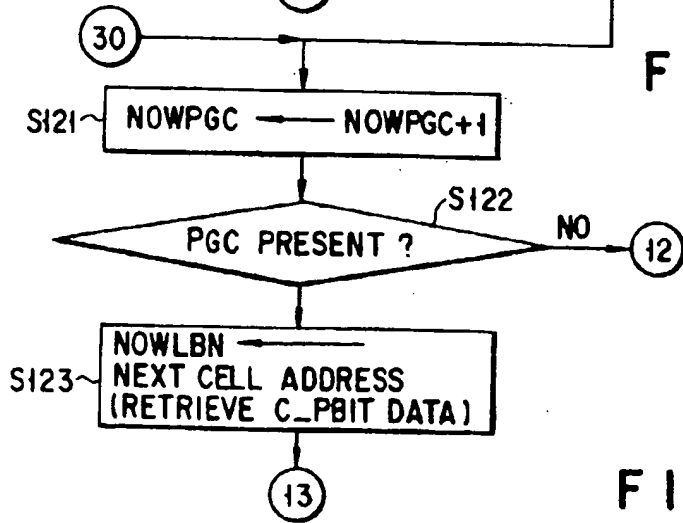


FIG. 42E

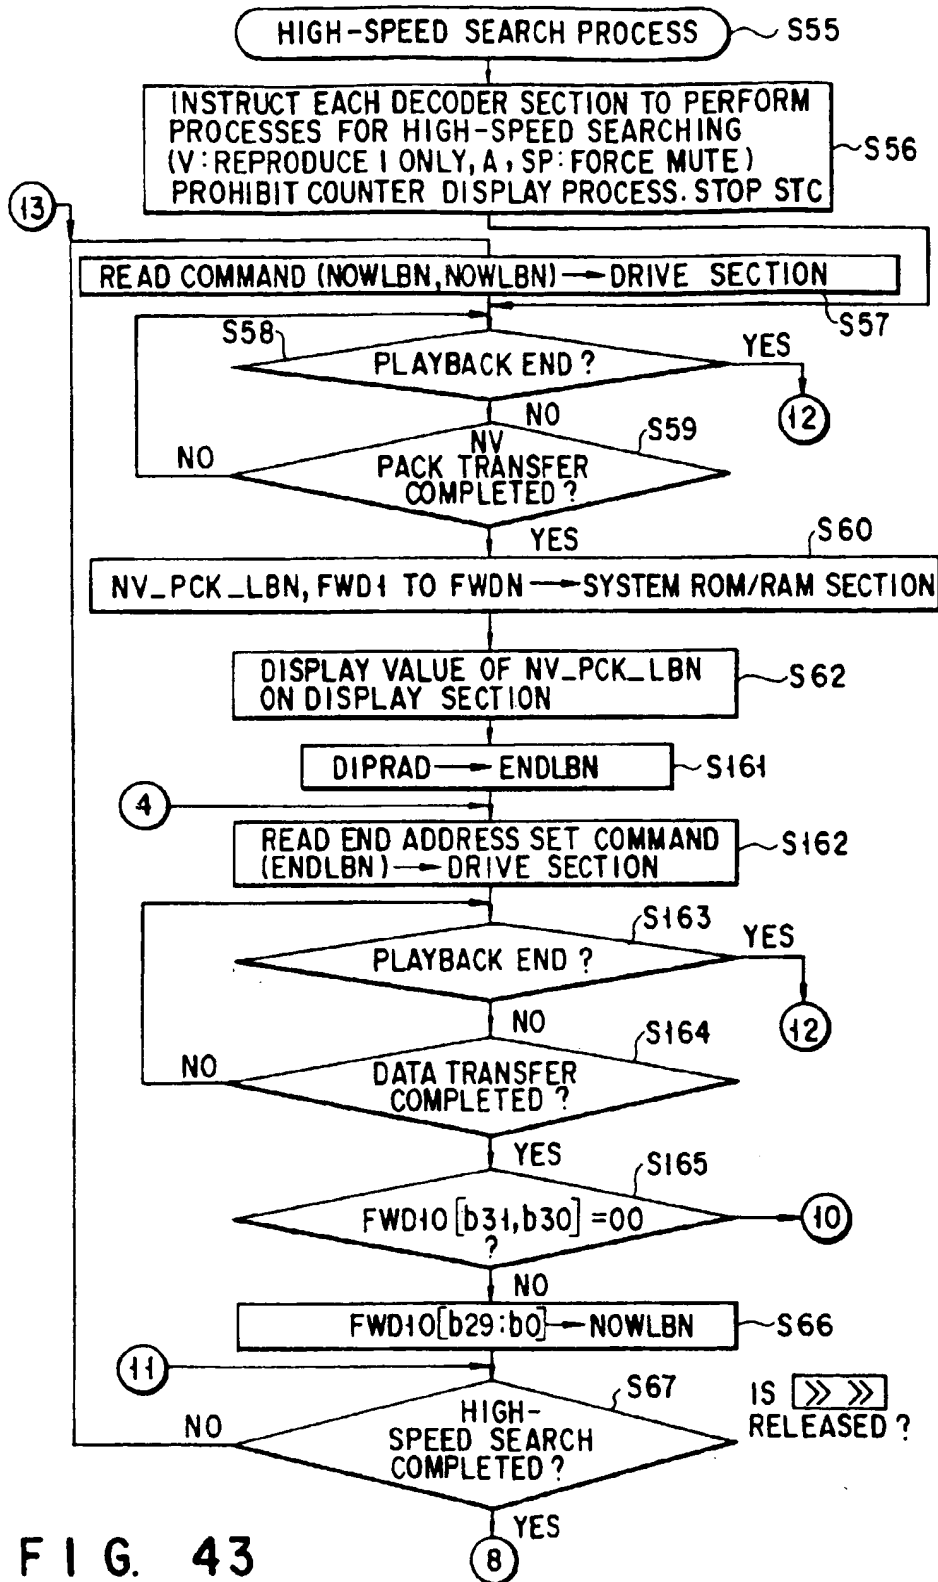


FIG. 43



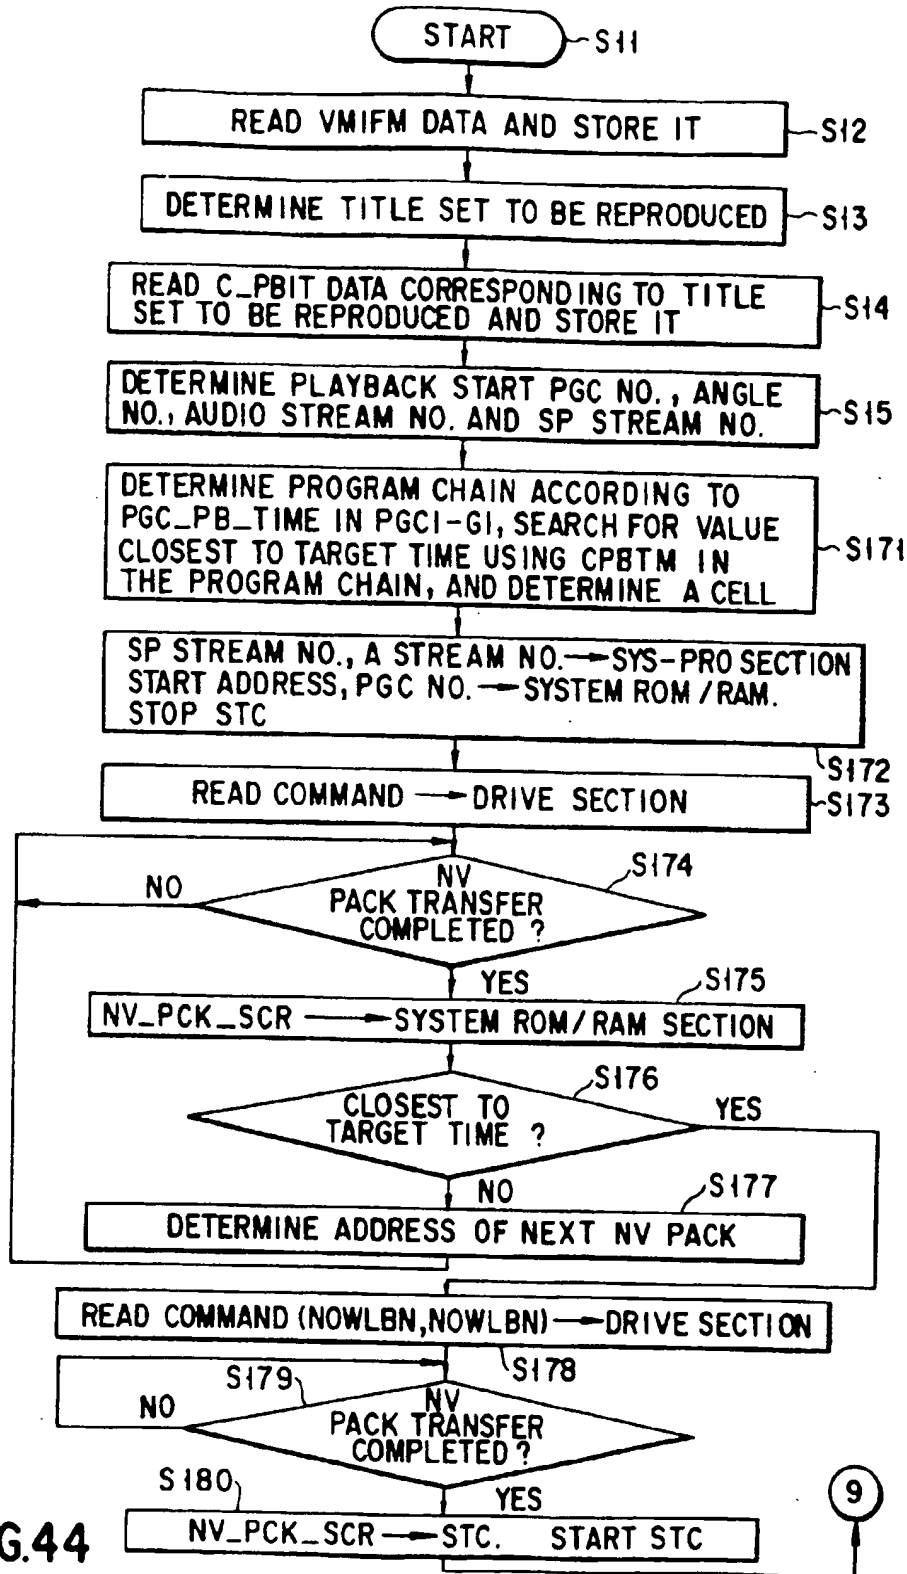


FIG.44

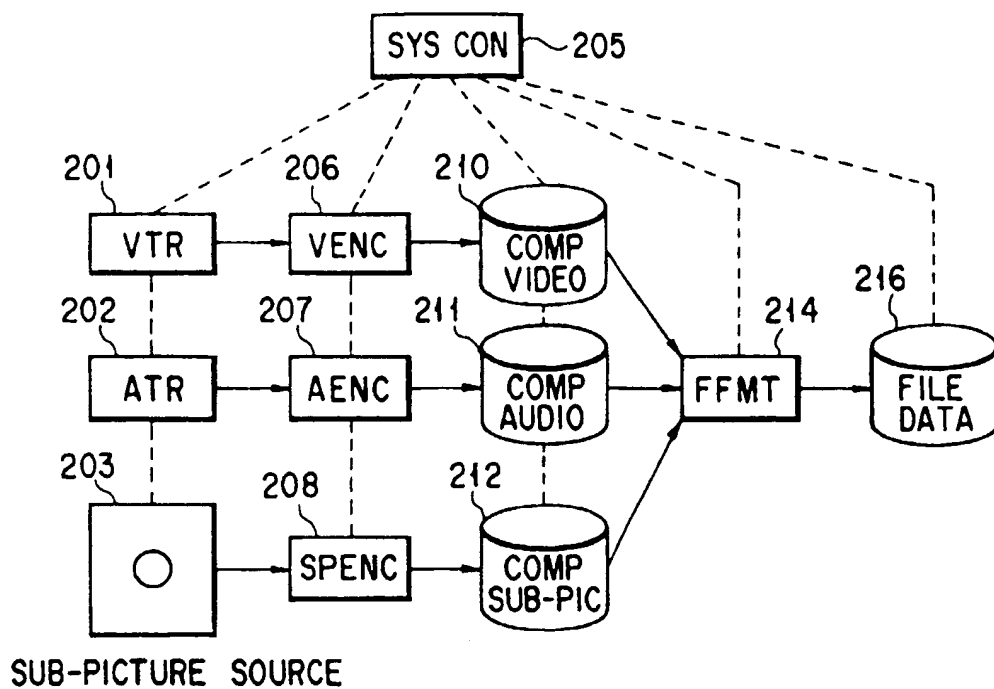


FIG. 45

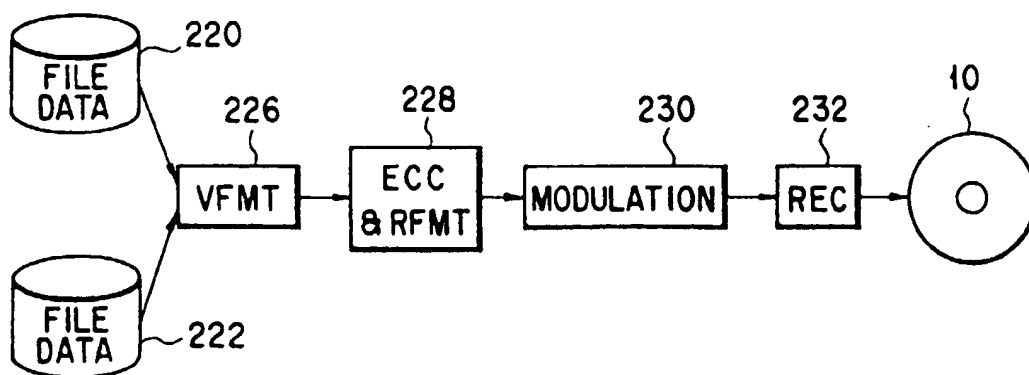


FIG. 48

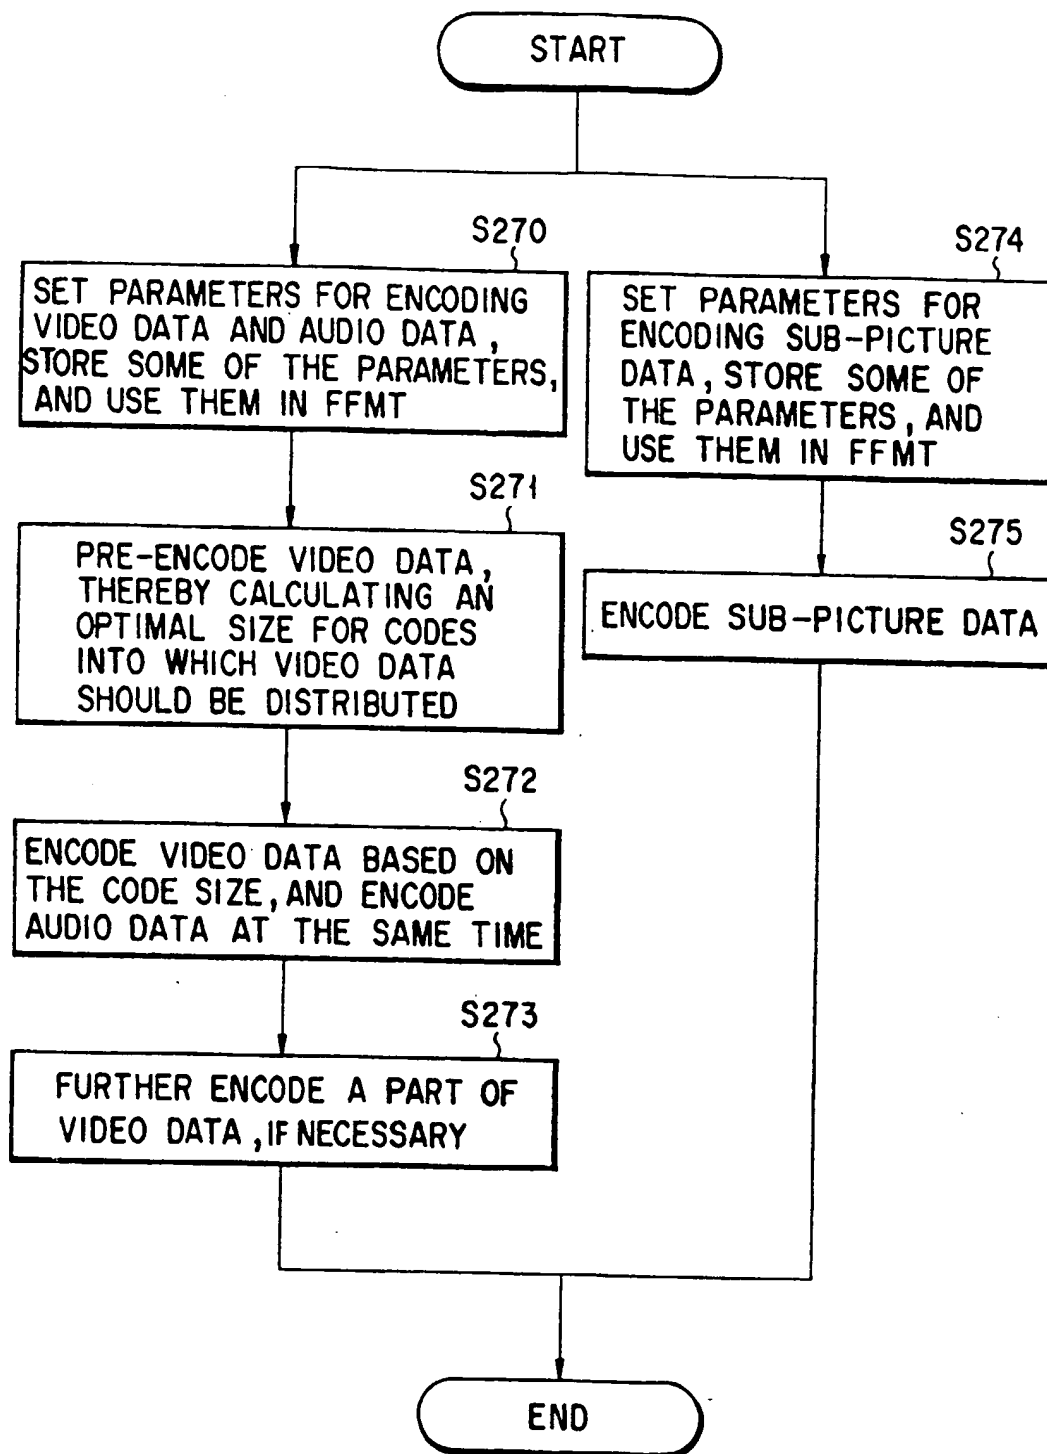


FIG. 46

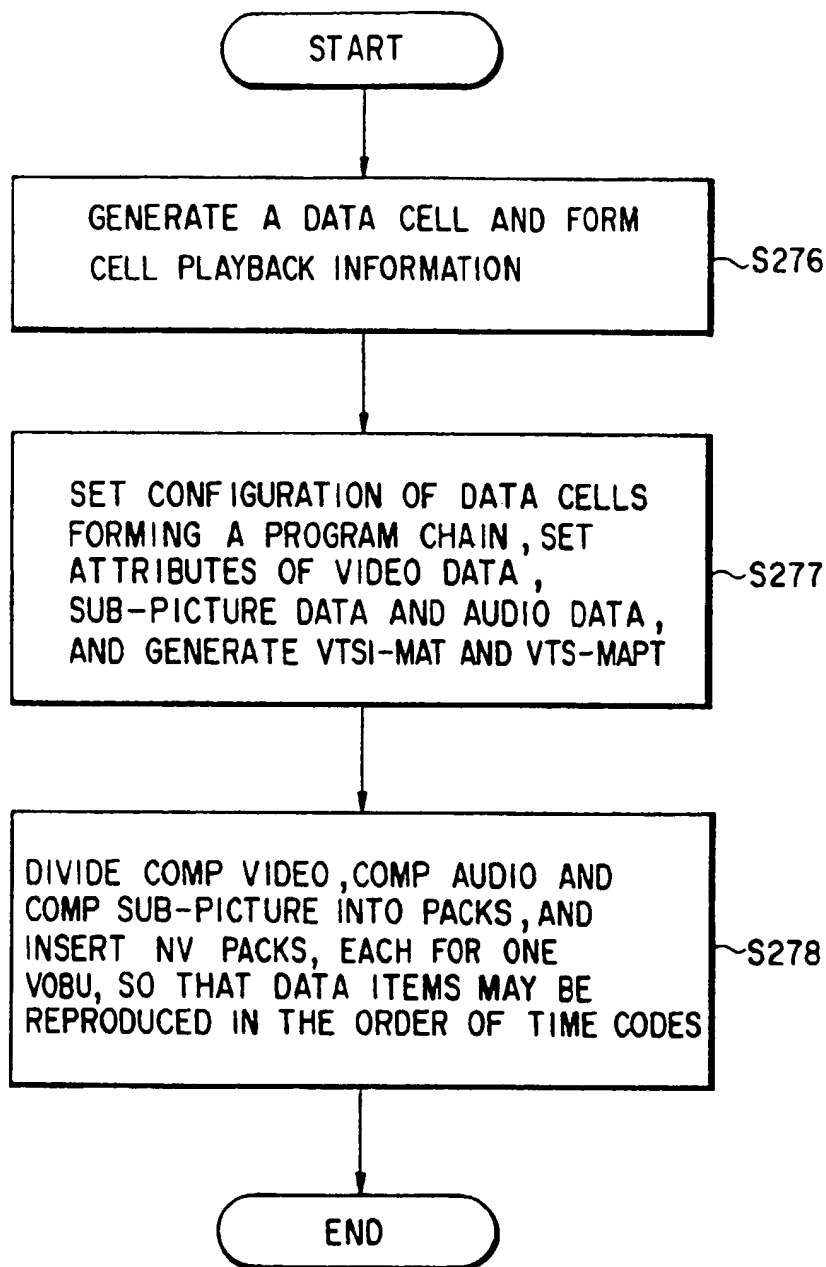


FIG. 47

